
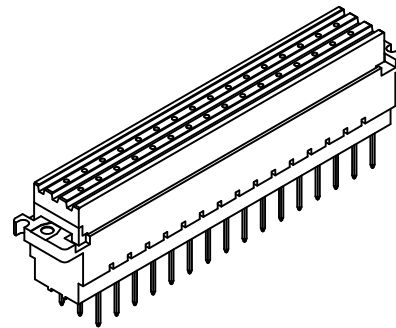


REV.	SPECIFICATION	ECN NO.	APPD.
R1			

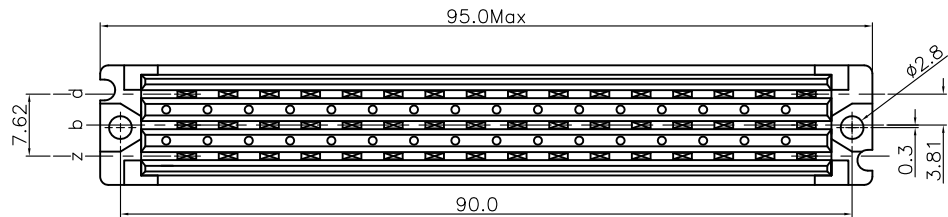




Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 AMP.
 Dielectric Withstanding Voltage: AC 1550V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 15mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

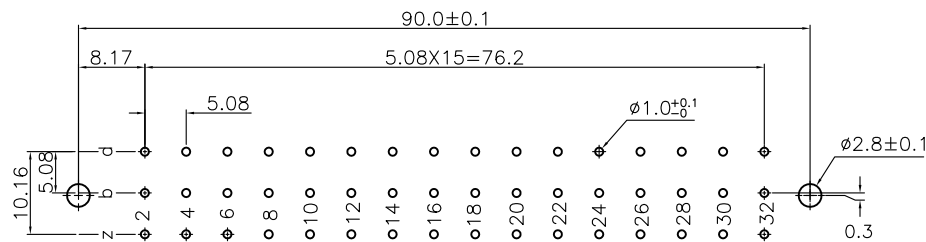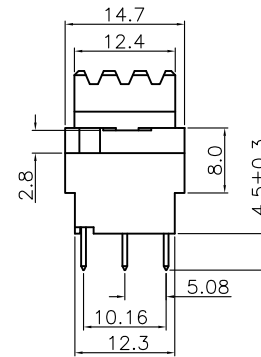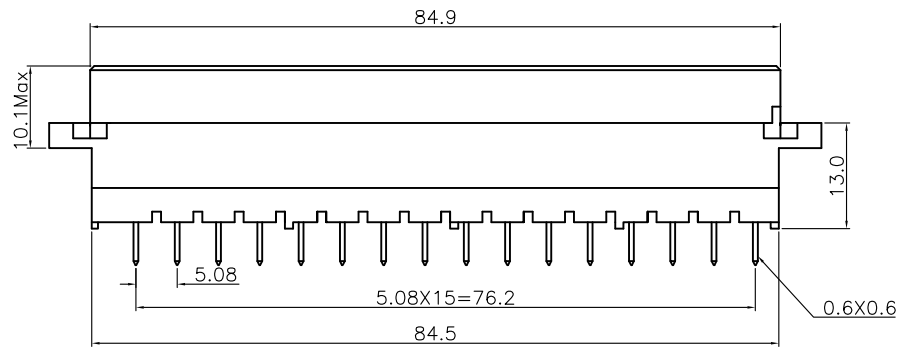

P.C. Board Layout

9001- 62 xx 1 C xx A
 Series | 2:Female | Position | 1: Dip Length | C: Dip Tin | Contact Gold | G: Gold Plated
 A: Tray Package
 00: G/F
 10: 10 μ"
 30: 30 μ"

Pitch	Position	Rows with Contacts	Contact Arrange
5.08mm	48	z b d	
	32	z - d	
	16	z - -	

Tolerances	Drawn No.	9001D62001	Title:
x = ±0.50	Projection		9001 Series DIN41612 F Type Female
.x = ±0.25	Unit	mm	
.xx = ±0.15	Scale	1:1	
	Drawn By	Rikey 05/21'10	

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-62xx1CxxA			
SHEET	1/1	Ver.No.	R1