
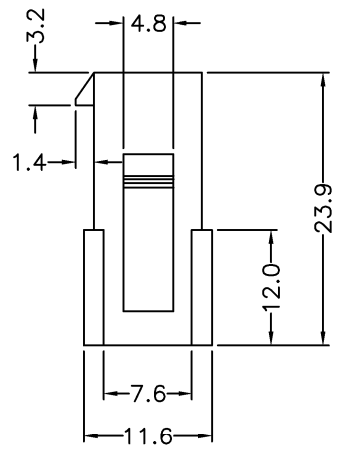
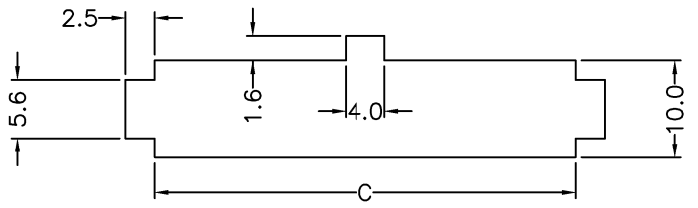
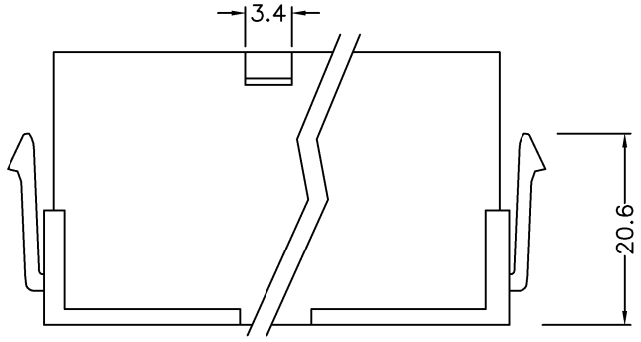


REV.	SPECIFICATION	ECN NO.	APPD.

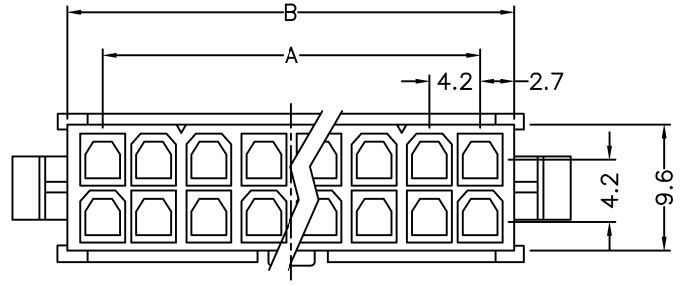

Material:

Housing: PA66, UL94V-2 or UL94V-0.

Electrical Characteristics:

Voltage Rating: 600V(R.M.S.).


Dielectric Withstanding Voltage: AC 1500V for 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

Positions	Dimension		
	A	B	C
2	/	5.4	5.8
4	4.2	9.6	10.0
6	8.4	13.8	14.2
8	12.6	18.0	18.4
10	16.8	22.2	22.6
12	21.0	26.4	26.8
14	25.2	30.6	31.0
16	29.4	34.8	35.2
18	33.6	39.0	39.4
20	37.8	43.2	43.6
22	42.0	47.4	47.8
24	46.2	51.6	52.0

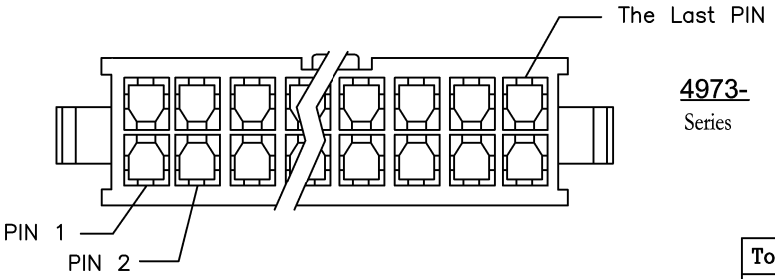

4973- Series **xx** No. of Position **F** Female **H** Housing **B** Bulk Package **-V0** Blank:UL94V-2
V0:UL94V-0


Tolerances	Dwg. No.	4973H02001	Title:	
.x = ±0.4	Projection	⊕ ⊖	4973 Series	
.xx = ±0.25	Unit	mm	Scale	1:1
x.xxx = ±0.08	Drawn By	Martin 03/10"21	4.2mm Connector	
			Female Housing	

4973 Series
4.2mm Connector
Female Housing


OUPIIN			
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4973-xxFHB-V0			
SHEET	1/2	Ver.No.	B5

REV.	SPECIFICATION	ECN NO.	APPD.


2P




4P




6P




8P



10P



12P



14P



16P




18P




20P



22P



24P

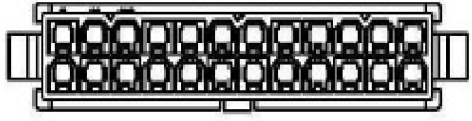

Tolerances .x = ±0.4 .xx = ±0.25 x.xxx = ±0.08	Dwg. No.	4973H02001	
	Projection		
	Unit	mm	Scale 1:1
	Drawn By	Martin 03/10"21	

Title: 4973 Series
4.2mm Connector
Female Housing

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4973-xxFHB-V0			
SHEET	2/2	Ver.No.	B5