



REV.	SPECIFICATION	ECN NO.	APPD.
R3			

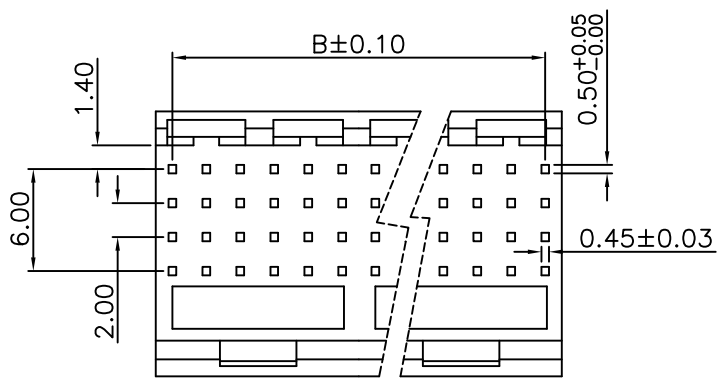

**Material:**

Housing: High Temperature Plastic UL94V-0.

**Electrical Characteristics:**




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Operating Temperature: -65°C~+125°C .



**\*RoHS Compliant**

Notes: Add the plastic of the convex platform only applies to 9111-4124Hx .

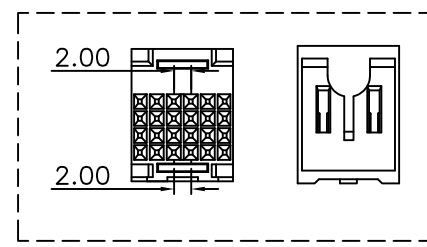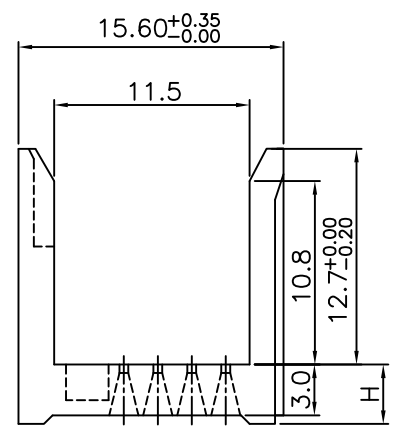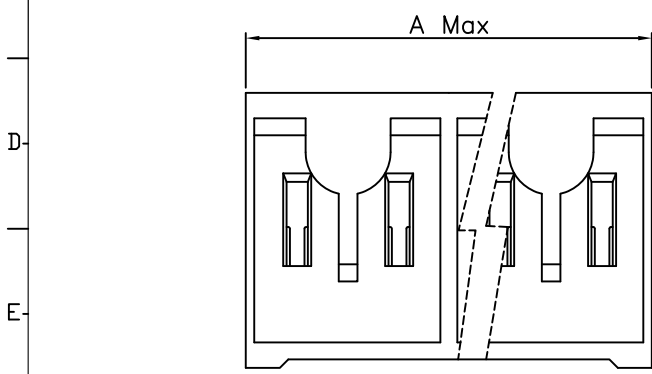

9111-4124Hx  
SCALE:1:2

H Length	H1	H2	H3
	3.50	4.40	6.90
Position	Dimension		
	A	B	
24	11.95	10.00	
48	23.95	22.00	
72	35.95	34.00	
96	47.95	46.00	
120	59.95	58.00	
144	71.95	70.00	
168	83.95	82.00	
192	95.95	94.00	
216	107.95	106.00	
240	119.95	118.00	

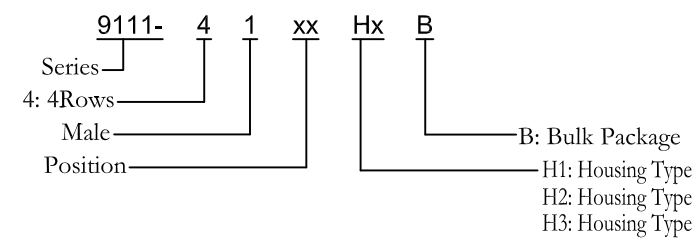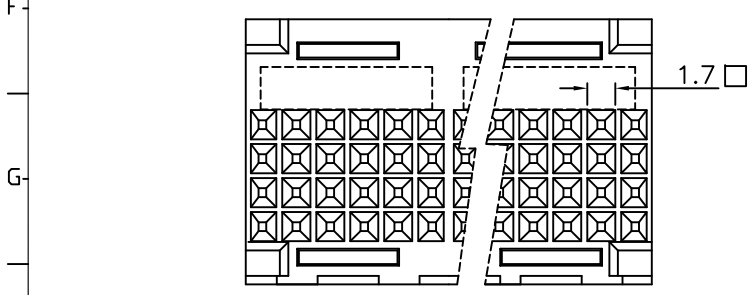

Tolerances	Drawn No.	9111D41127	
x = ±0.5	Projection	⊕ ↗	
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	LQ 05/10'16	

Title: 9111 Series  
H.D. Male 2.0mm  
Housing

**OUPIN**  
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.  
P/N: 9111-41xxHxB

SHEET	1/1	Ver.No.	R3
-------	-----	---------	----