






REV.	SPECIFICATION	ECN NO.	APPD.

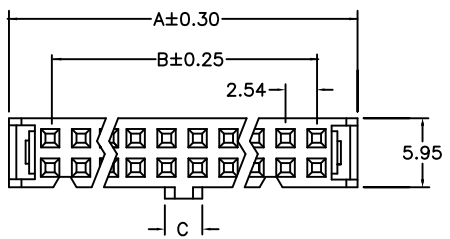




Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.
Cable: 1.27mm (0.050") pitch flat cable.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 500V.
Insulator Resistance: 3000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -40°C~+105°C.



***RoHS Compliant**

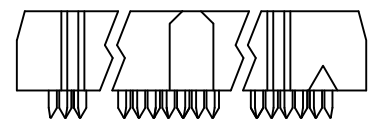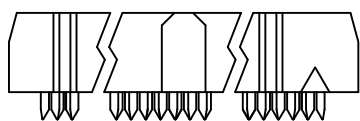

Position	Dimension		
	A	B	C
6	12.18	05.08	1.9
8	14.72	07.62	1.9
10	17.27	10.16	3.6
12	19.80	12.70	3.6
14	22.35	15.24	3.6
16	24.89	17.78	3.6
18	27.42	20.32	3.6
20	29.97	22.86	3.6
24	35.05	27.94	3.6
26	37.59	30.48	3.6
30	42.67	35.56	3.6
34	47.75	40.64	3.6
36	50.43	43.18	3.6
40	55.37	48.26	3.6
44	60.64	53.34	3.6
50	68.07	60.96	3.6

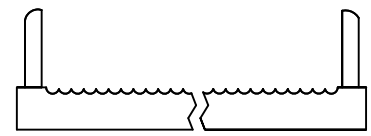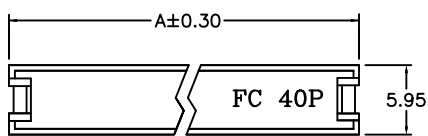

1001- Series **xx** No. of Pin Count **C** C: Selective Gold Plated G: Gold Plated **00** 00: G/F 10: 10μ" 15: 15μ" 30: 30μ" **B** B: Black Y: Grey **2** 2: Without Strain Relief **A** A: Tray Package

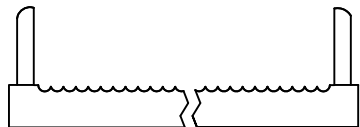

Tolerances	Dwg. No.	1001D02005	Title:	
x = ±0.5	Projection		1001 Series	
.x = ±0.25	Unit	mm	I.D.C Socket	
.xx = ±0.15	Scale	1:1	2.54mmX2.54mm	
	Drawn By	Peggy10/19'15	① 718	

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 1001-xxC00B2A			
SHEET	1/1	Ver.No.	A4