

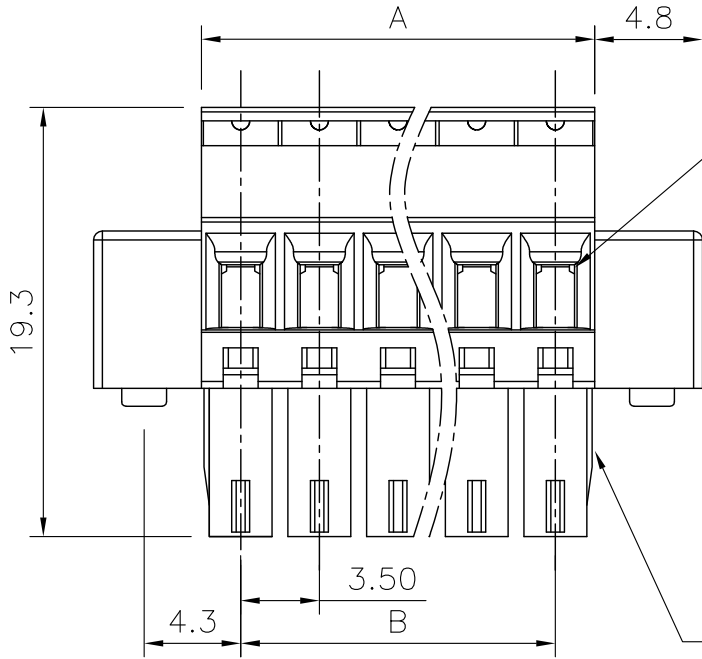


REV.	SPECIFICATION	ECN NO.	APPD.

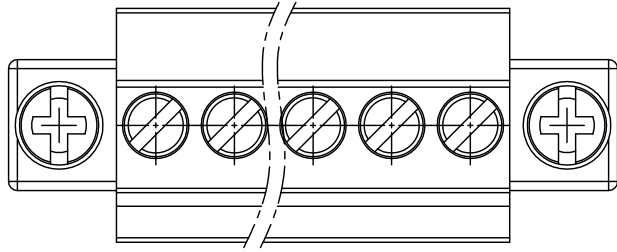

□ 2.8X1.7

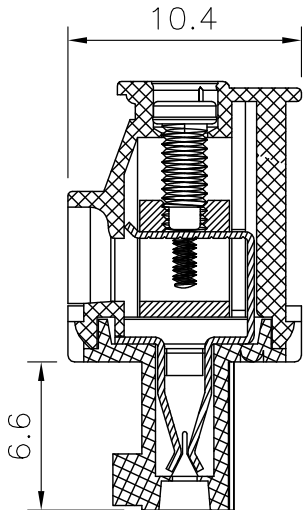

2P to 6P with wedge, above 7P without wedge (including 7P)

8933- C 104193 G AA CG xx A
 Series _____
 C: Pitch 3.5mm _____
 Manufacturing Code _____
 G: Green _____
 B: Black _____
 Y: Grey _____
 U: Blue _____
 A: Tray Package _____
 No. of Positions _____
 CG: With Flange A Side _____
 AA: Slotted "-" Screw _____

Material:
 Housing: PA66, UL94V-0.
 Solder Pin: Phosphor Bronze, Tin Plated.
 Clamp: Brass, Ni Plated.
 Screw: Steel, Zinc Plated., M2.
 Flange Screw: Steel, Zinc Plated., M2.5.
Electrical Characteristics:
 Voltage Rating: 300V.
 Current Rating: 8A.
 Solid Wire(AWG): 16-28.
 Stranded Wire(AWG): 16-28.
 Torque: 1.7Lb-In.
 Wire Strip Length: 6-7mm.
 Withstanding Voltage: 1.6KV.
 Operating Temperature: -40°C~+115°C.
***RoHS Compliant**

Position	2 Thru 24
Dimension	
A	No. of Positions X 3.5
B	(No. of Positions - 1) X 3.5

Tolerances	Dwg No.	8933D02011
x = ±0.50	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Polly12/28'17

Title:
 8933 Series
 3.5mm Terminal Block
 ①780

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 8933-C104193GAACGxxA			
SHEET	1/1	Ver. No.	A2