
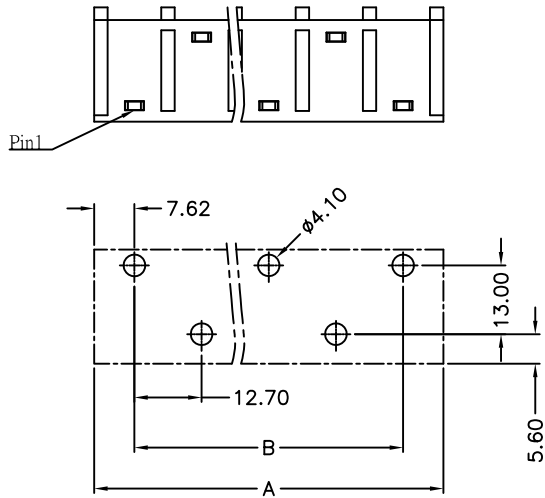
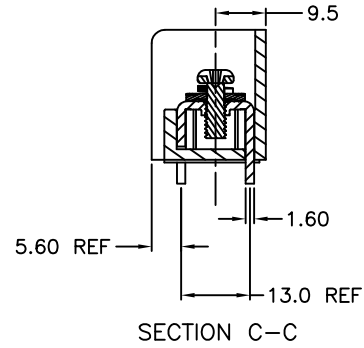
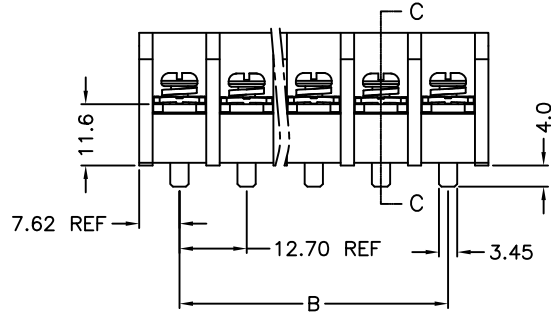



REV.	SPECIFICATION	ECN NO.	APPD.

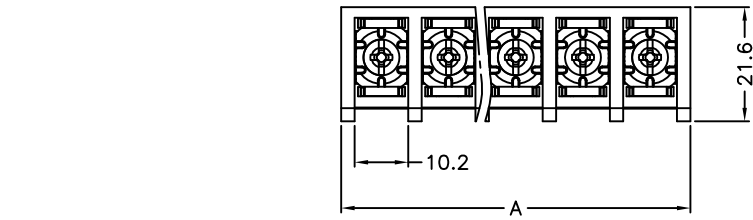

P.C. Board Layout

Material:

Housing: PA66, UL94V-0, Black.
Terminal: Brass, Tin Plated.
Terminal Screw: Steel M4.0, Zinc Plated.

Electrical Characteristics:

Current Rating: 45A.
Rated Rating: 600V.
Withstanding Voltage: AC 2500V min.
Insulation Resistance: 1000MΩ min. at DC 500V.
Wire Range: 8-18AWG.
Operating Temperature: -40°C~+125°C.

***RoHS Compliant**

8936- Q 216226 N 3 1 CD xx S B
Series Q:Pitch 12.7mm Manufacturing Code N:W/O Cover 3:Footprint Dip: 4.0mm CD:W/O Flange No. of Positions S:Straight B:Box Package

Position	02-08P	09-15P	16-20P
A	±0.40	±0.50	±0.60
Position	02 Thru 20		
A	(No. of Positions-1)X12.7+15.24		
B	(No. of Positions-1)X12.7		

Tolerances	Dwg. No.	8936D02002
x = ±0.50	Projection	
.x = ±0.30	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Ping 8/20'19

Title: 8936 Series
12.7mm Terminal Block
Straight Type
① 780

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N:8936-Q216226N31CDxxSB			
SHEET	1/1	Ver.No.	A2