
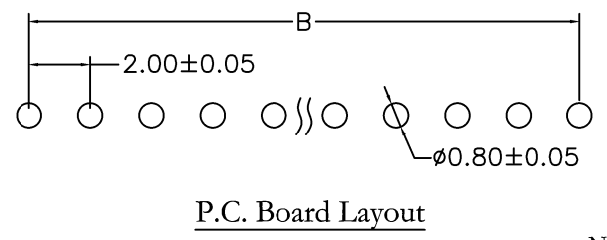
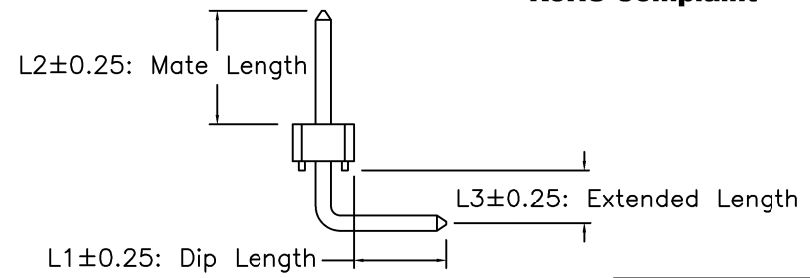
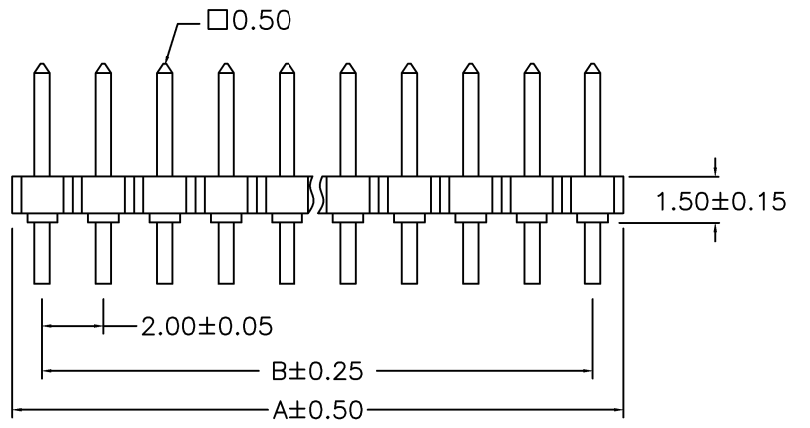



REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PA9T, UL94V-0, Black.
Contacts: Brass, Gold Plated over Nickel 30~50u" or 80~120u" Matte Tin Plated over Nickel 30~50u".

Electrical Characteristics:
Voltage Rating: 125V.
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: 500V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -40°C~+105°C.
***RoHS Compliant**

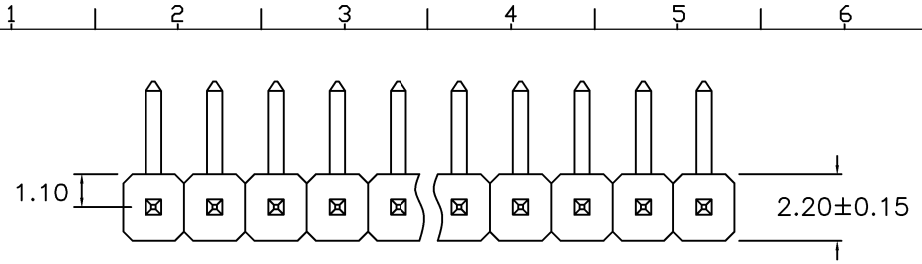

Series: 2111- 1 X xx G 00 R B
Single Row
No. of Pin Per Row
G: Gold Plated
T: Matte Tin Plated
B: Bulk Package
R: Right Angle
00: Gold Flash
10: 10u"
15: 15u"
30: 30u"
Blank: For Matte Tin Plated

Positions	Dimension		Positions	Dimension	
	A	B		A	B
02	4.00				
03	6.00	4.00	22	44.00	42.00
04	8.00	6.00	23	46.00	44.00
05	10.00	8.00	24	48.00	46.00
06	12.00	10.00	25	50.00	48.00
07	14.00	12.00	26	52.00	50.00
08	16.00	14.00	27	54.00	52.00
09	18.00	16.00	28	56.00	54.00
10	20.00	18.00	29	58.00	56.00
11	22.00	20.00	30	60.00	58.00
12	24.00	22.00	31	62.00	60.00
13	26.00	24.00	32	64.00	62.00
14	28.00	26.00	33	66.00	64.00
15	30.00	28.00	34	68.00	66.00
16	32.00	30.00	35	70.00	68.00
17	34.00	32.00	36	72.00	70.00
18	36.00	34.00	37	74.00	72.00
19	38.00	36.00	38	76.00	74.00
20	40.00	38.00	39	78.00	76.00
21	42.00	40.00	40	80.00	78.00

Standard item:
ie: 2111-1XxxG00RB
Dip 3.0mm, Mate 3.7mm, Extended 1.75mm.
Custom item:
ie: 2111-1XxxG00R-3-4-1.75B(2111-1XxxG00R-L1-L2-L3B)
3.0mm Dip Length (increment of 0.1mm)
4.0mm Mate Length (increment of 0.1mm)
1.75mm Extended Length (increment of 0.1mm)

Tolerances	Dwg. No.	2111D01004		Title:	2111 Series		 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 2111-1XxxG00RB SHEET 1/1 Ver.No. B3
.x = ±0.38	Projection	⊕ ⊖		Pin Header 2.0mm			
	Unit	mm	Scale	1:N			
.xx = ±0.25	Drawn By	Martin 08/12'21		Single Row Straight Solder Type			