

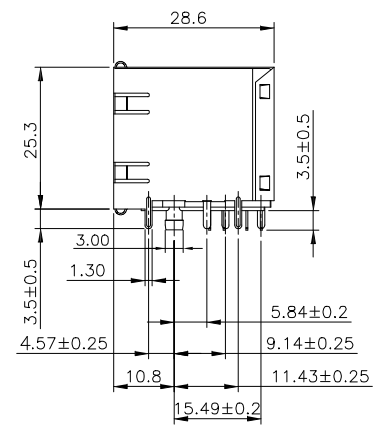



REV.	SPECIFICATION	ECN NO.	APPD.

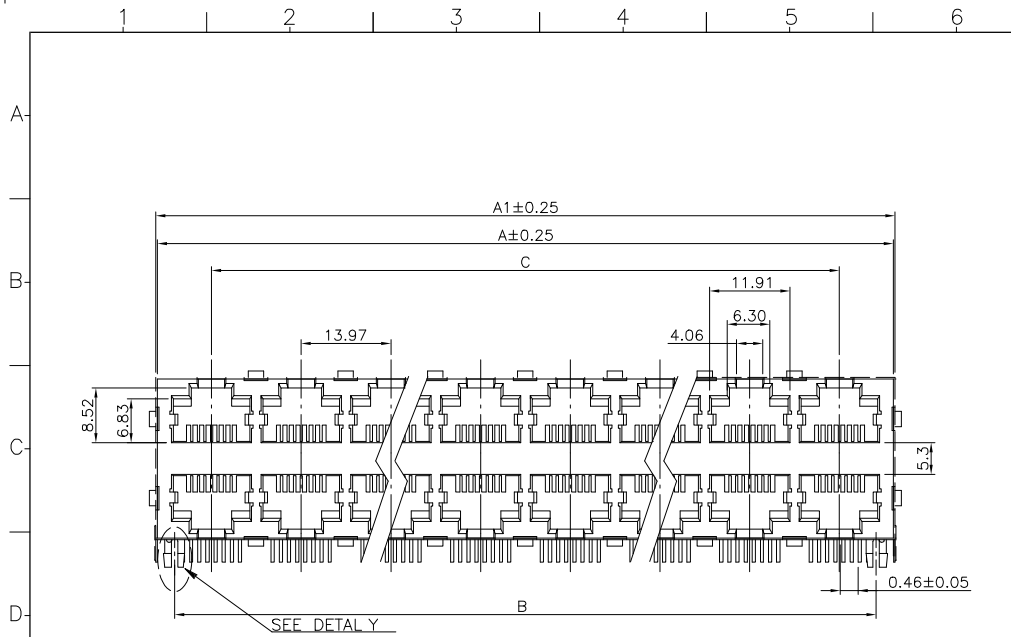


Shield

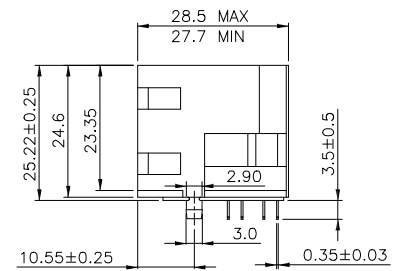

Non-Shield



DETAIL Y

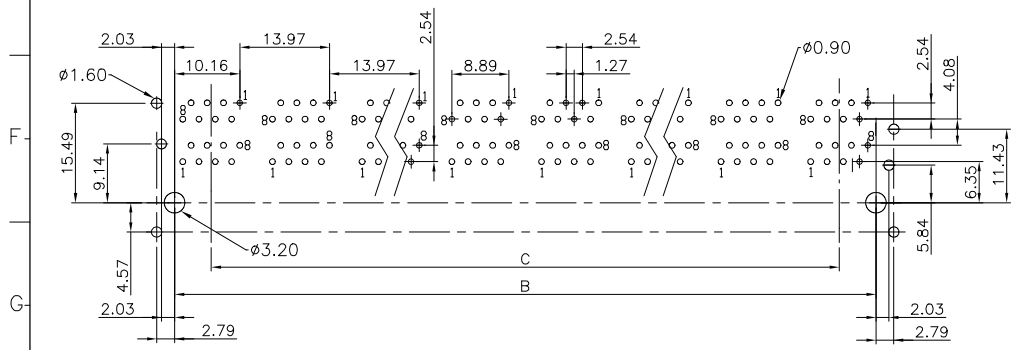

P.C.Board Layout(T=1.6mm)

Tolerance: ±0.05mm

Material:
Housing: PBT, UL94V-0.
Contacts: Phosphor Bronze, Gold Plated on Contact Area and Gold Flash on solder tail over Nickel 50u".
Shell: Brass, Nickel Plated.
Electrical Characteristics:
Current Rating: 1.5 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulation Resistance: 500MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -40°C~+85°C.
***RoHS Compliant**

8949-AID2 8 8 x -06 S x B A
Series: 8949-AID2
Position: 8 8
Contacts: 8: 8 Contacts
Shield: S: Shield, Blank: Non-Shield
Package: A: Tray Package, B: Black
Grounding: *0: Without Grounding, *1: With Grounding
Plating: 06: 06u" Gold Plated, 15: 15u" Gold Plated, 30: 30u" Gold Plated, 50: 50u" Gold Plated

*Only apply to shield Type.

Port Dim	2 Ports	4 Ports	8 Ports	12 Ports	16 Ports
A1	17.25	31.25	59.25	87.25	115.00
A	16.45	30.42	58.55	86.55	114.40
B	11.43	25.40	53.34	81.28	109.22
C	13.97	25.40	41.91	69.85	97.79

Tolerances	Dwg No.	8949D02195	Title:	8949-AID2 Series
.x = ±0.25	Projection		RJ Stacked Modular Jack	
.xx = ±0.13	Unit	mm	Scale	1:1
.xxx = ±0.05	Drawn By	Martin 11/23'22	Right Angle Type CAT 5e	

①563

OUPIIN
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 8949-AID288x-06SxB
SHEET 1/1 Ver.No. A7