



REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN200444	






**Material and Plating:**

Housing: LCP, UL94V-0, Black.  
 Power Contacts: High Conductivity Copper .  
 30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min.


**Electrical Characteristics:**

Current Rating: Power: 150AMP.  
 Dielectric Withstanding Voltage: Power: DC 1500V For 1 minute.  
 Insulator Resistance: Power: 5000MΩ min. at DC 500V.  
 Contact Resistance: 0.10mΩ max  
 Operating Temperature: -40°C ~ +105°C.

**\*RoHS Compliant**

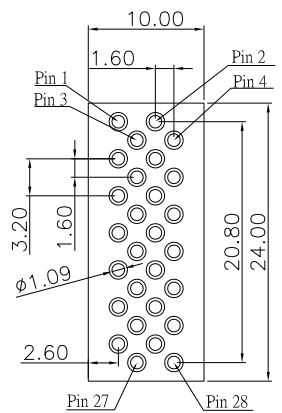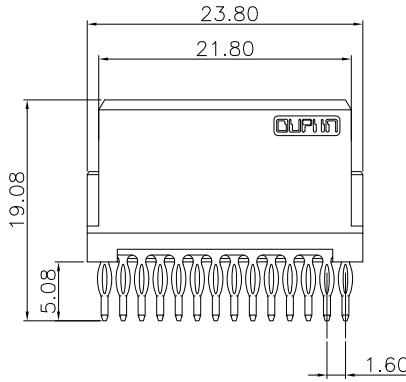

P.C.Board Layout  
(Tolerance: ±0.05)

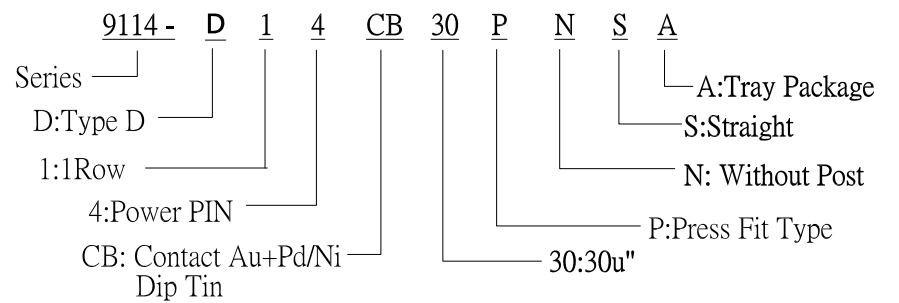

Tolerances	Dwg No.	9114-D0000-027	
x = ±0.50	Projection	⊕ ⊖	
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	GYJ 04/25/20'	

Title: 9114 Series  
 Female Power 150AMP  
 Connector

<b>OUPIN</b>			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9114-D14CB30PNSA			
SHEET	1/1	Ver.No.	R3