
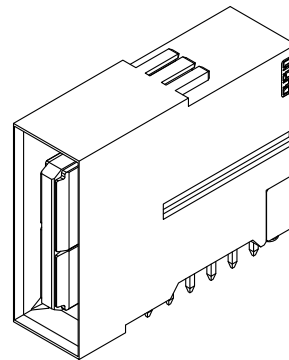


REV.	SPECIFICATION	ECN NO.	APPD.
R6		ECN220387	

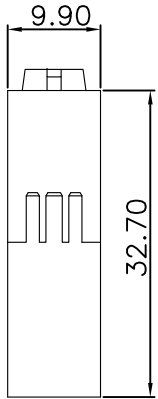




Material and Plating:

Housing: LCP, UL94V-0, Black.
 Power Contacts: High Conductivity Copper.
 30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .

Electrical Characteristics:


Current Rating: Power: 150AMP.
 Dielectric Withstanding Voltage: Power: DC 1500V For 1 minute.
 Insulator Resistance: Power: 5000MΩ min. at DC 500V.
 Contact Resistance: 0.10mΩ max
 Operating Temperature: -40°C ~ +105°C.

***RoHS Compliant**

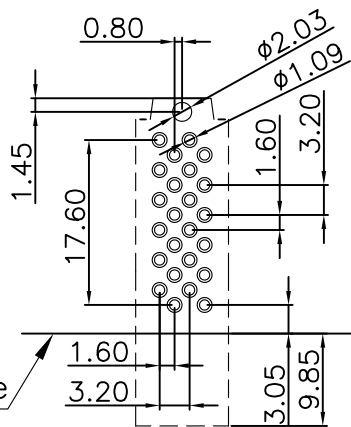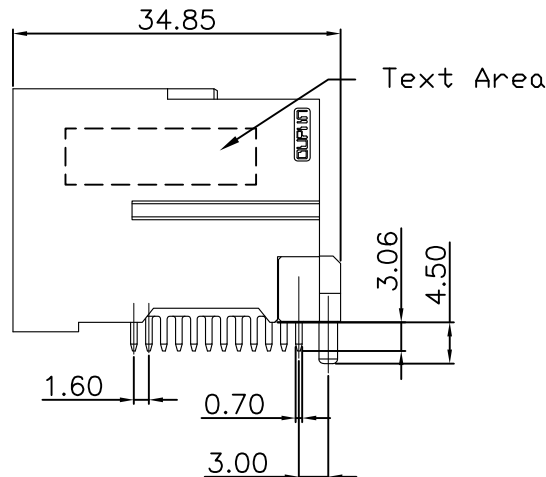

PCB Edge

P.C. Board Layout
(Tolerance: ±0.05)

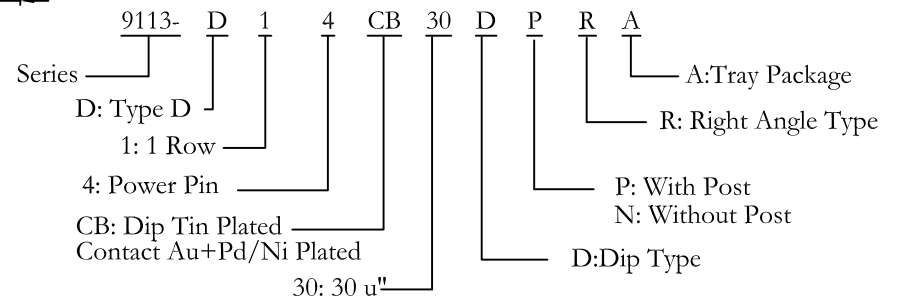

Tolerances	Dwg.No.	9113-D0000-028		Title:
X=±0.5	Projection			9113 Series Male Power 150AMP Connector
.X=±0.25	Unit	mm	Scale 1:1	
.XX=±0.15	Drawn By	ZY 3/28'22		

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9113-D14CB30DPRA			
SHEET	1/1	Ver.No.	R6