
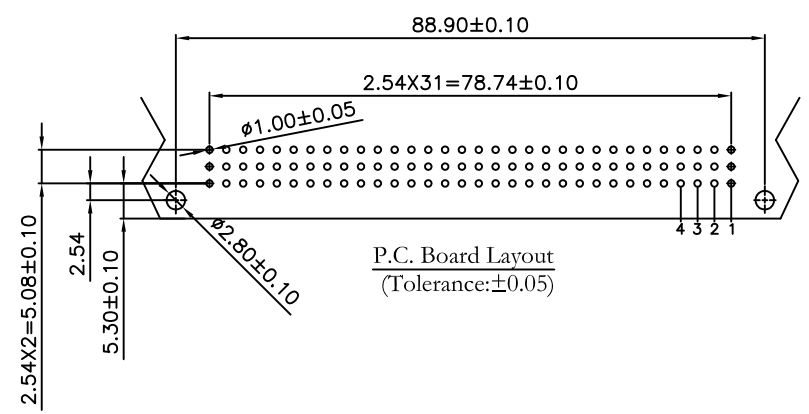
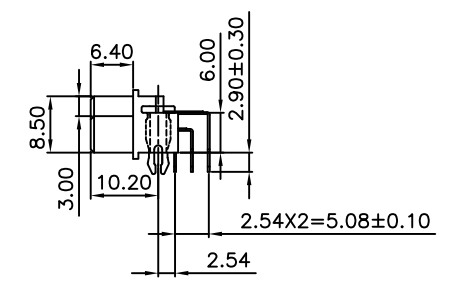
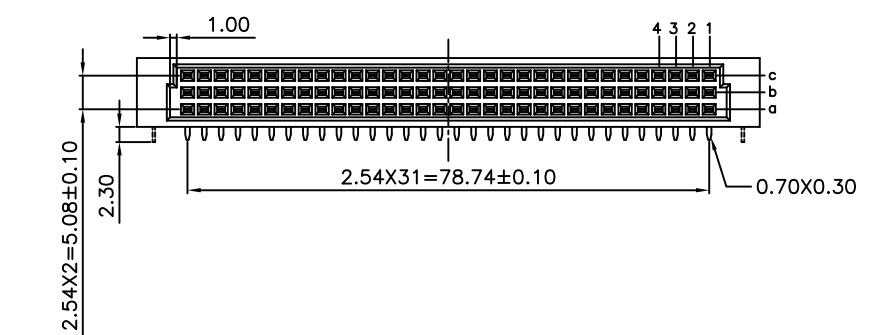
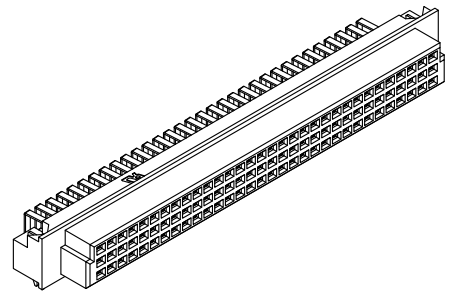


REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN180114	

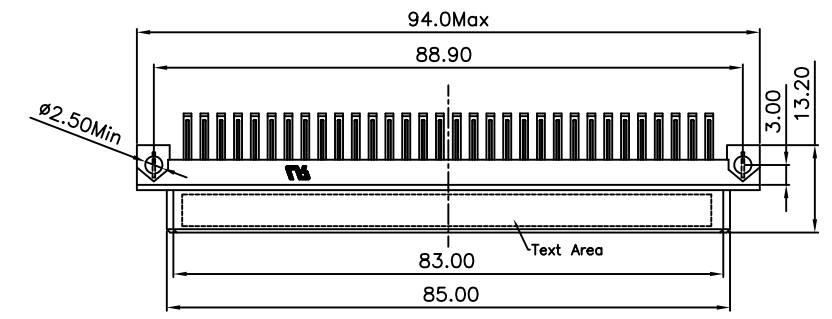

9001-C 1 4 xx 1 C xx x A

Series

1: 2.54mm
2: 5.08mm
4: Female
Position

1: Dip Length

A: Tray Package
Blank: W/O Lock
L1: With Lock
00: G/F
10: 10μ"
15: 15μ"
30: 30μ"
C: Dip Tin
Contact Gold

Material:

Housing: 30% Glass Filled PBT UL94V-0.
Contacts: Phosphor Bronze.
Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20 mΩ max. at DC 100mA.
Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

9001-C14961CxxxA		a b c	96	2.54mm
9001-C14641CxxxA		a - c	64	
9001-C14321CxxxA		a - -	32	
9001-C24481CxxxA		a b c	48	5.08mm
9001-C24321CxxxA		a - c	32	
9001-C24161CxxxA		a - -	16	
P/N	Contact Arrange	Rows With Contacts	Position	Pitch

Tolerances	Dwg No.	9001-D0000-002
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1/1
	Drawn By	MXM 01/09'18

Title:

9001 Series
DIN 41612
R Type Female

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 9001-C1(2)4xx1CxxxA

SHEET	1/1	Ver.No.	R4
-------	-----	---------	----