
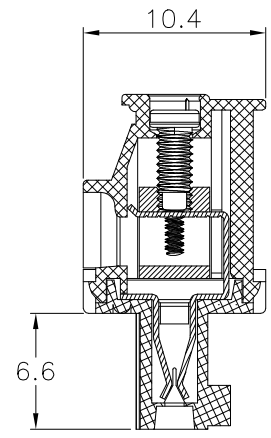
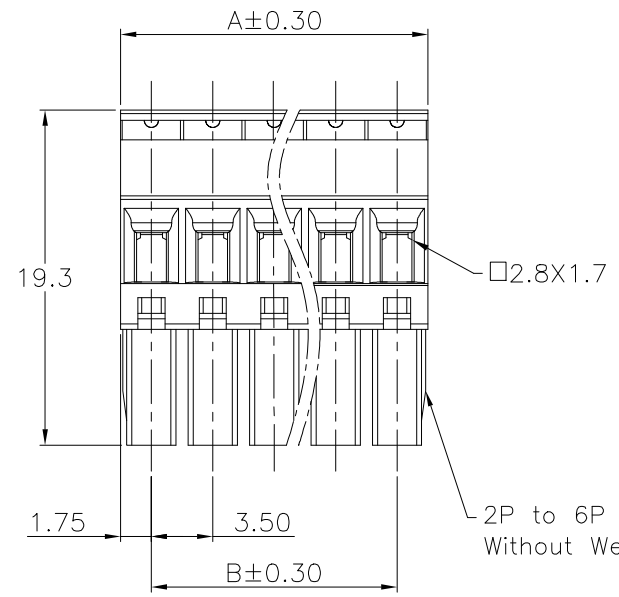


REV.	SPECIFICATION	ECN NO.	APPD.

**Material:**  
Housing: PA66, UL94V-0.  
Solder Pin: Phosphor Bronze, Tin Plated.  
Clamp: Brass, Ni Plated.  
Screw: Steel, Zinc Plated, M2.

**Electrical Characteristics:**  
Voltage Rating: 300V.  
Current Rating: 8A.  
Solid Wire(AWG): 16-28.  
Stranded Wire(AWG): 16-28.  
Torque: 1.7Lb-In.  
Wire Strip Length: 6-7mm.  
Withstanding Voltage: 1.6KV.  
Operating Temperature: -40°C~+115°C.

**\*RoHS Compliant**



8933- C 104193 G AA CJ xx x

Series \_\_\_\_\_  
C:Pitch 3.5mm \_\_\_\_\_  
Manufacturing Code \_\_\_\_\_  
G:Green \_\_\_\_\_  
B:Black \_\_\_\_\_  
Y:Grey \_\_\_\_\_  
U:Blue \_\_\_\_\_

\_\_\_\_\_ B:2-4P Bulk Package  
\_\_\_\_\_ A:5-24P Tray Package  
\_\_\_\_\_ No. of Positions  
\_\_\_\_\_ CJ:W/O Flange B Side  
\_\_\_\_\_ AA:Slotted "-" Screw

Dimension			
Tolerance	Positions	A	B
±0.10	02	7.00	3.50
	03	10.50	7.00
	04	14.00	10.50
	05	17.50	14.00
	06	21.00	17.50
	07	24.50	21.00
	08	28.00	24.50
	±0.20	09	31.50
10		35.00	31.50
11		38.50	35.00
12		42.00	38.50
13		45.50	42.00
14		49.00	45.50
15		52.50	49.00
16		56.00	52.50
±0.30	17	59.50	56.00
	18	63.00	59.50
	19	66.50	63.00
	20	70.00	66.50
	21	73.50	70.00
	22	77.00	73.50
	23	80.50	77.00
	24	84.00	80.50

Tolerances	Drawn No.	8933D02018	Title:	8933 Series	 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N:8933-C104193GAACJxxx
x = ±0.50	Projection		3.5mm Terminal Block		
.x = ±0.30	Unit	mm	Scale	1:1	
.xx = ±0.10	Drawn By	Martin 07/18'22	(Old P/N: 8300-XXFTS11-01)	Ver.No.	A2
				Ø780	SHEET

