

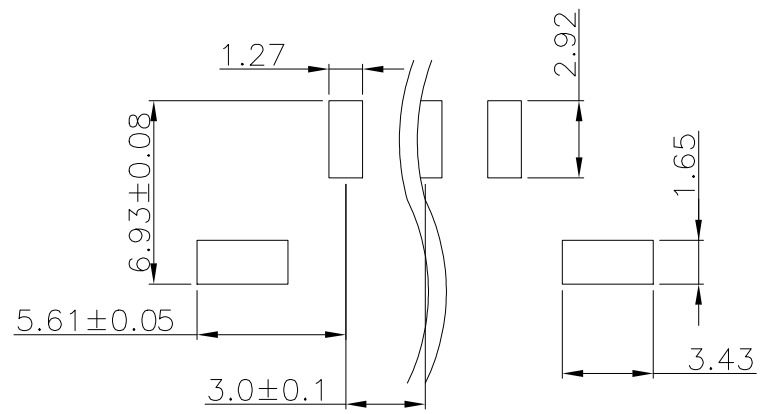
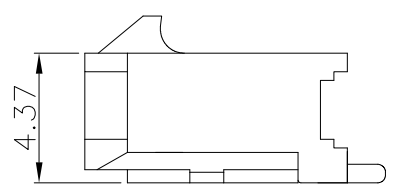
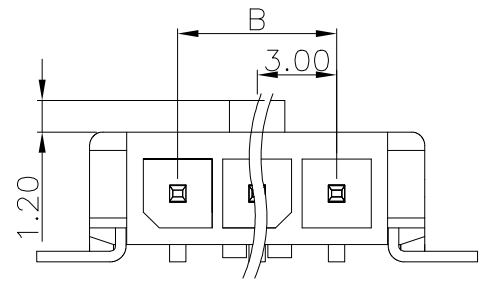


REV.	SPECIFICATION	ECN NO.	APPD.

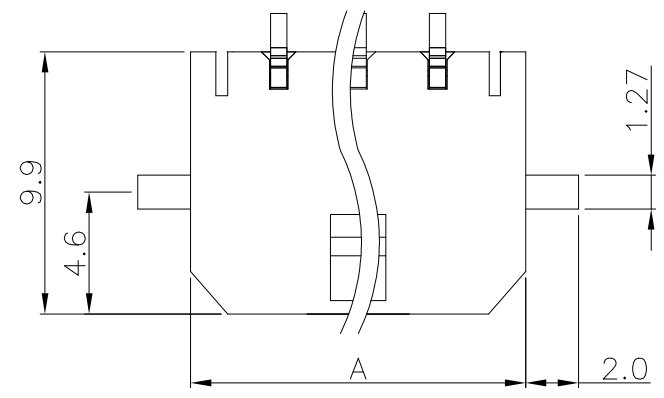

P.C. Board Layout

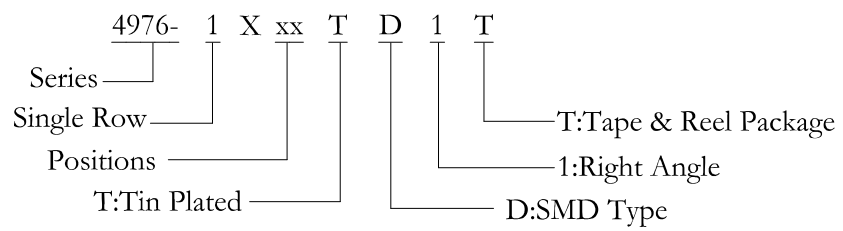


Dimension		
Positions	A	B
02	9.65	3.00
03	12.65	6.00
04	15.65	9.00
05	18.65	12.00
06	21.65	15.00
07	24.65	18.00
08	27.65	21.00
09	30.65	24.00
10	33.65	27.00
11	36.65	30.00
12	39.65	33.00

Material:
Housing: LCP, UL94V-0.
Contacts: Brass, 100u" Tin Plated over Nickel 30u".
Electrical Characteristics:
Voltage Rating: 250V.
Current Rating: 5.0A.
Dielectric Withstanding Voltage: AC 1500V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 10mΩ max.
Operating Temperature: -25°C~+85°C.
***RoHS Compliant**


Tolerances .x = ±0.25 .xx = ±0.15 .xxx = ±0.05	Dwg. No.	4976D01006		Title: 4976 Series 3.0mm Wafer SMD Right Angle Type ①667	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 4976-1XxxTD1T	
	Projection					
	Unit	mm	Scale			1:N
	Drawn By	Martin 10/30'23				SHEET

REV.	SPECIFICATION	ECN NO.	APPD.


2P




3P




4P




5P




6P




7P




8P




9P




10P



11P



12P



Tolerances	Dwg. No.	4976D01006			
	Projection				
	.x = ±0.25	Unit	mm	Scale	1:N
	.xx = ±0.15	Drawn By	Martin 10/30'23		
.xxx = ±0.05				① 667	

Title: 4976 Series
 3.0mm Wafer SMD
 Right Angle Type

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4976-1XxxTD1T			
SHEET	2/2	Ver.No.	B3