

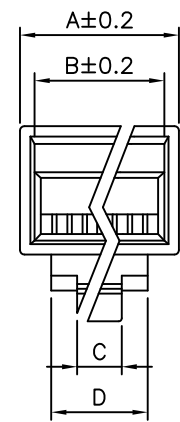
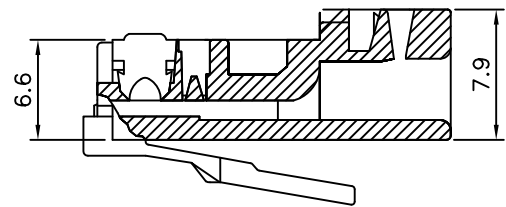
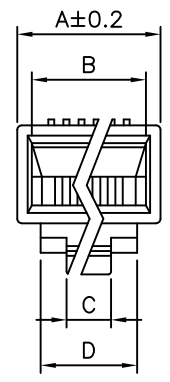
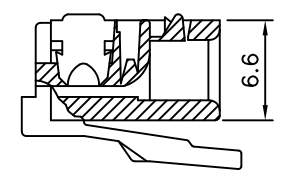
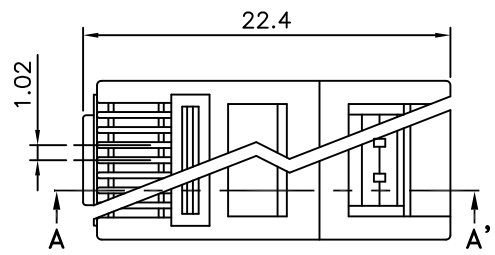


REV.	SPECIFICATION	ECN NO.	APPD.



Section A-A'
(4 & 6 Position)

Section A-A'
(8 & 10 Position)

- 8949-A x x -06 R B
- Series
 - 10: 10 Position
 - 8: 8 Position
 - 6: 6 Position
 - 4: 4 Position
 - 10: 10 Contacts
 - 8: 8 Contacts
 - 6: 6 Contacts
 - 4: 4 Contacts
 - 2: 2 Contacts
 - B: Bulk Package
 - R: Round Cable
 - Blank: Flat Oval Cable
 - 06: 6μ" Gold Plated
 - 15: 15μ" Gold Plated
 - 30: 30μ" Gold Plated
 - 50: 50μ" Gold Plated

No. of Position	No. of Contacts	Dimensions			
		A	B	C	D
4	2	7.62	5.20	2.52	4.99
4	4	7.62	5.20	2.52	4.99
6	2	9.60	5.20	3.25	6.05
6	4	9.60	5.20	3.25	6.05
6	6	9.60	7.15	3.25	6.05
8	8	11.60	9.60	3.20	6.10
10	10	11.60	10.00	3.20	6.10

Tolerances	Dwg. No.	8949D01001
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Lucas 12/13'17

Title:
8949-A Series
Modular Plug

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 8949-Axx-06RB

SHEET	1/1	Ver.No.	B3
-------	-----	---------	----

Q773