

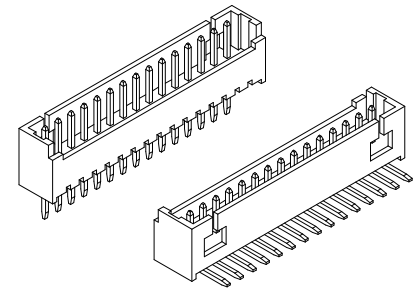

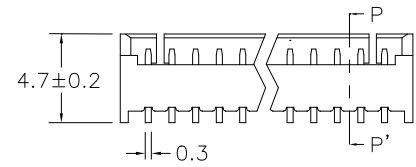

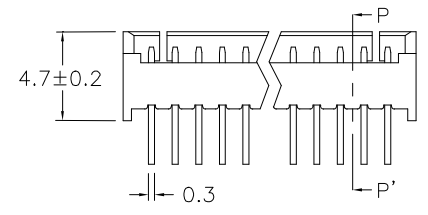


REV.	SPECIFICATION	ECN NO.	APPD.

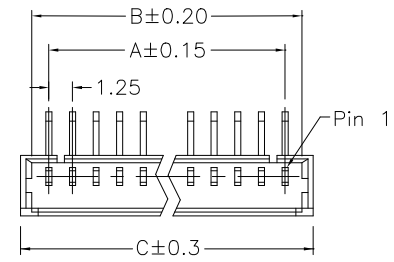






**Material:**  
Housing: PA6T,UL94V-0,,Natural.  
Contacts: Brass,100u" Matte Tin Plated over Nickel 50u".  
**Electrical Characteristics:**  
Current Rating: 1 AMP.  
Voltage Rating: 125V AC.  
Dielectric Withstanding Voltage: AC 250V.  
Insulator Resistance: 100MΩ min.  
Contact Resistance: 20mΩ max.  
Operating Temperature: -25°C~+85°C.  
**\*RoHS Compliant**

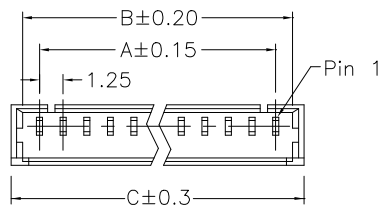

Straight Type  
Section P-P'

Right Angle Type  
Section P-P'

Positions	Dimension		
	A	B	C
02	1.25	3.05	4.25
03	2.50	4.30	5.50
04	3.75	5.55	6.75
05	5.00	6.80	8.00
06	6.25	8.05	9.25
07	7.50	9.30	10.50
08	8.75	10.55	11.75
09	10.00	11.80	13.00
10	11.25	13.05	14.25
11	12.50	14.30	15.50
12	13.75	15.55	16.75
13	15.00	16.80	18.00
14	16.25	18.05	19.25
15	17.50	19.30	20.50



4573- xx MT x B  
Series No. of Pin Count MT: Matte Tin Plated G10: Gold Plated 10u" S: Straight R: Right Angle B: Bulk Package

Tolerances	Dwg. No.	4573D01001	Title:
x = ±0.5	Projection		4573 Series
.x = ±0.25	Unit	mm	Wafer 1.25mm(0.049")
.xx = ±0.15	Scale	1:N	DIP Type
	Drawn By	Martin 02/06'24	

Wafer 1.25mm(0.049")  
DIP Type

**OUPIN**  
**OUPIN ELECTRONIC(KUNSHAN) CO., LTD.**  
P/N: 4573-xxMTxB

SHEET	1/1	Ver.No.	B1
-------	-----	---------	----