

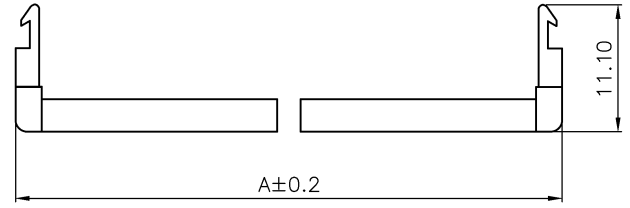

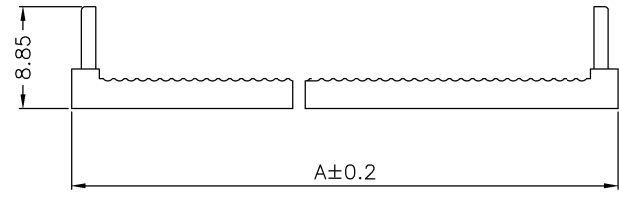

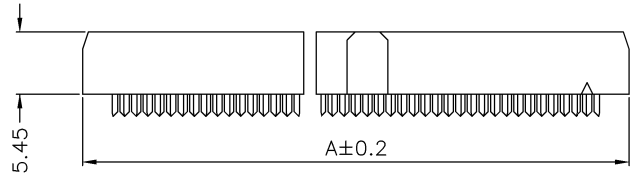



REV.	SPECIFICATION	ECN NO.	APPD.

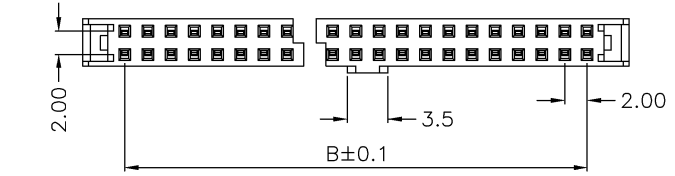

Material:

Housing: PBT, UL94V-0.
 Contacts: Phosphor Bronze, Gold Plated on Contact Area over 30u" Nickel and on Wire Cutting Area.

Cable: 1.00mm(0.039") pitch flat cable.

Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 500V.
 Insulation Resistance: 1000MΩ min.
 Contact Resistance: 30mΩ max.
 Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

Position	Dimension	
	A	B
08	13.25	6.00
10	15.25	8.00
12	17.25	10.00
14	19.25	12.00
16	21.25	14.00
18	23.25	16.00
20	25.25	18.00
22	27.25	20.00
24	29.25	22.00
26	31.25	24.00
30	35.25	28.00
34	39.25	32.00
40	45.25	38.00
44	49.25	42.00
50	55.25	48.00

1101- xx C 00 B 1 WB A
 Series No. of Pin Count C: Selective Gold Plated 00: Gold Flash 10: 10u" 15: 15u" 30: 30u" B: Black 1: With Strain Relief 2: Without Strain Relief WB: With Polarizing Bump A: Tray Package

Tolerances	Dwg. No.	1101D02002	Title:		 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 1101-xxC00B1WBA SHEET 1/1 Ver.No. A3
x = ±0.5	Projection		1101 Series		
.x = ±0.30	Unit	mm	Scale	1:1	
.xx = ±0.20	Drawn By	Martin 02/08'23	718	2.0mmX2.0mm	