
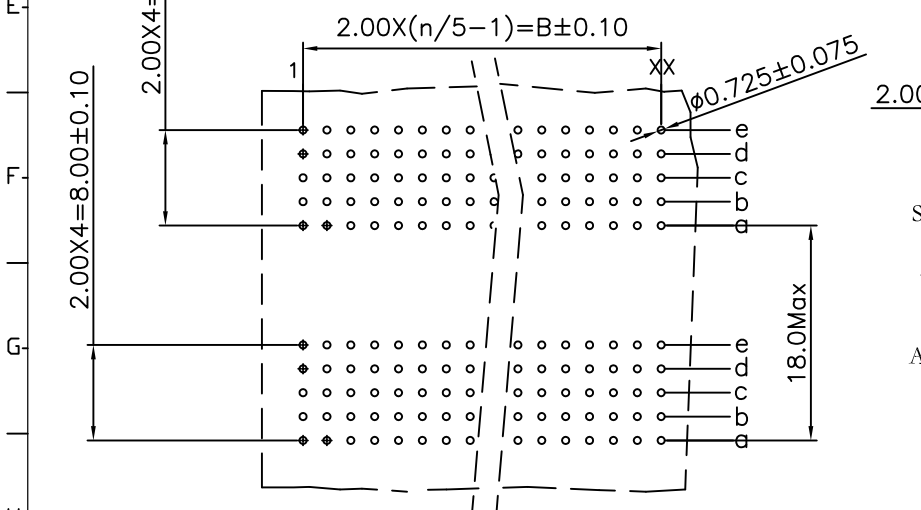
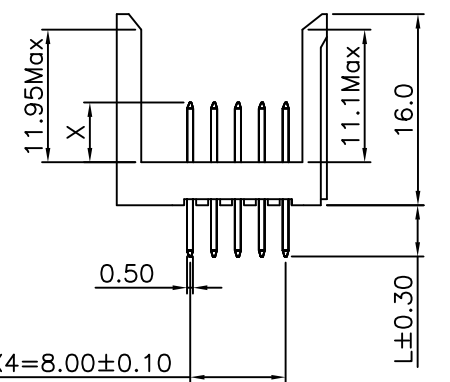


REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN140707	

Material:
Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

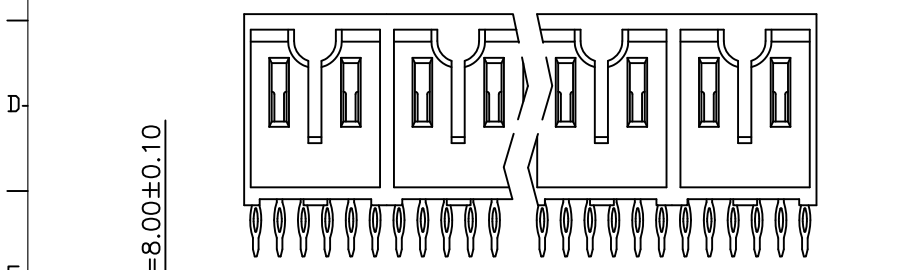

9111- 5 1 xx x C xx P U
Series 5: 5Rows 1: Male Signal Position
A: A~V See Dimension

C: Dip Tin
Contact Gold
G: Gold

U: Tube Package
P: Press Fit Type
10: 10μ"
30: 30μ"

Position (n)	Dimension		P/N.	L	X
	A	B			
30	11.95	10.0	9111-51xxBCxxPU	4.3	5.00
60	23.95	22.0	9111-51xxECxxPU		5.75
90	35.95	34.0	9111-51xxFCxxPU		6.50
120	47.95	46.0	9111-51xxHCxxPU	13.6	7.25
150	59.95	58.0	9111-51xxKCxxPU		8.00
180	71.95	70.0	9111-51xxLCxxPU		5.00
210	83.95	82.0	9111-51xxMCxxPU	17.0	5.75
240	95.95	94.0	9111-51xxNCxxPU		6.50
270	107.95	106.0	9111-51xxRCxxPU		7.25
300	119.95	118.0	9111-51xxSCxxPU	8.00	8.00
330	131.95	130.0	9111-51xxTCxxPU		5.00
360	143.95	142.0	9111-51xxUCxxPU		5.75
390	155.95	154.0	9111-51xxVCxxPU	6.50	8.00

Tolerances	Dwg. No.	9111D51012	Title:		OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9111-51xxxCxxPU
x = ±0.5	Projection		9111 Series		
.x = ±0.25	Unit	mm	H.D. Male 2.0mm		
.xx = ±0.15	Scale	1:1	Press Fit Type 5 Rows		
	Drawn By	YQ 09/30'14	SHEET	1/1	Ver.No.
					R2