


Note:

UL Style:AWM 20624 60V -30°C~80°C
 UL Style:AWM 20706 60V -30°C~105°C

***RoHS Compliant**

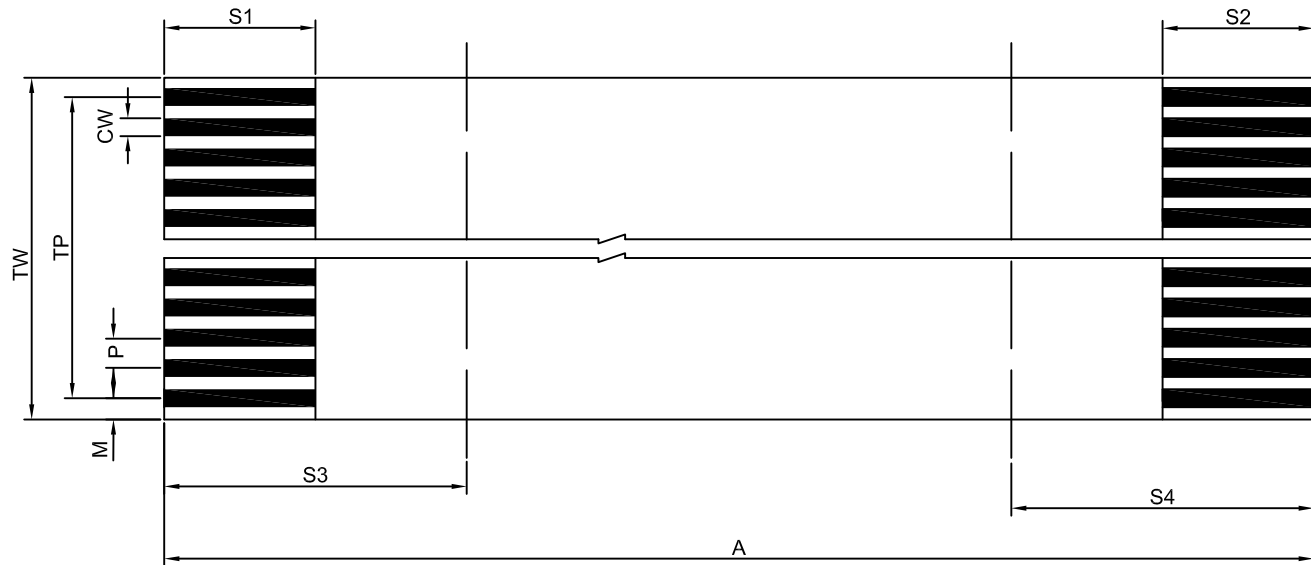

FC5 x -xx 1 C 4 4 8 8 * xxmm

Series
 1: Pitch 0.5
 2: Pitch 1.0
 3: Pitch 1.25
 4: Pitch 2.54

No. of Pin Count
 0.5 Pitch For 4~80P.
 1.0 Pitch For 4~60P.
 1.25 Pitch For 2~46P.
 2.54 Pitch For 2~24P.

1: UL 20624
 2: UL 20706

Total Length
 S4: 8.0mm(5mm To 10mm Increment 1.0mm)
 S3: 8.0mm(5mm To 10mm Increment 1.0mm)
 S2: 4.0mm(2mm To 5mm Increment 1.0mm)
 S1: 4.0mm(2mm To 5mm Increment 1.0mm)

A: A Type
 B: B Type
 C: C Type
 D: D Type

TYPE					
A					
B					
C					
D					
Code	SIZE	Tolerance	Code	SIZE	Tolerance
P	PITCH	± 0.1	S1 S2	2.0-5.0	±0.5
A	TOTAL LENGTH	±1(30-100) ±3(101-300) ±5(301-600) ±8(601-900)	S3 S4	5.0-10.0	±1.0
			CW	0.3-1.27	±0.03
TW	Px(n+1)	±0.15	CT	0.035-0.1	±0.01
TP	Px(n-1)	±0.15	T	0.3	±0.05
M	(TW-TP)/2	±0.1			

Pitch	Flexible	CW	CT
0.5	Super Flexible	0.3	0.035
1.0	Flexible	0.6	0.05
1.25	Flexible	0.8	0.05
2.54	Low Flexible	1.27	0.08

Tolerances	Drawn No.	FC5XF00001	Part No.
x = ±0.5 .x = ±0.25 .xx = ±0.15	Date	20160614	FC5x-xx1C4488*xxmm
	Unit mm	Scale 1:1	Title: Flexible Flat Cable
	Drawn By	Scott	①513

OUPIN

OUPIN ENTERPRISE CO., LTD.

Projection		Ver. No.	A5
------------	--	----------	----