
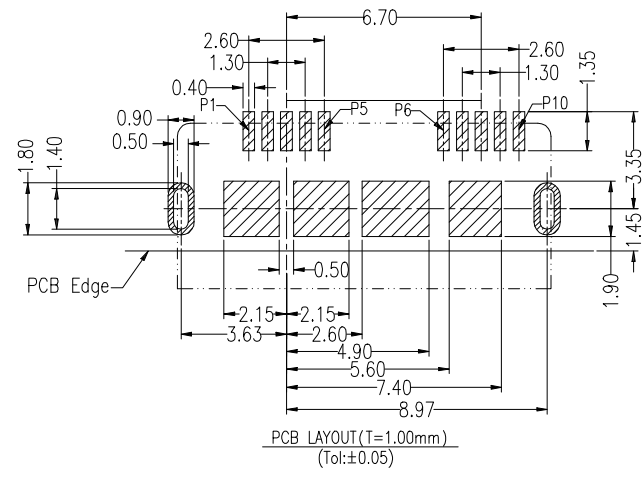
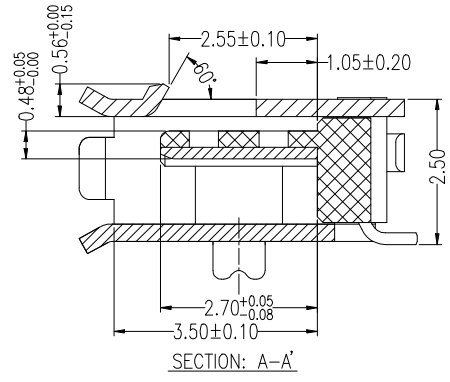
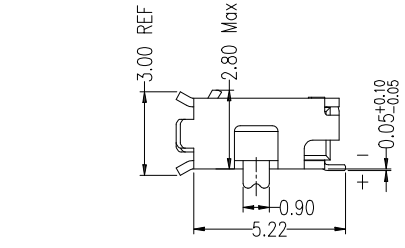
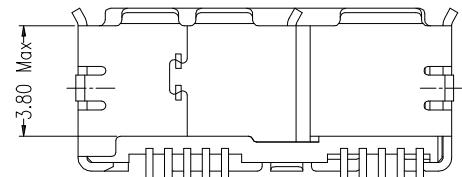
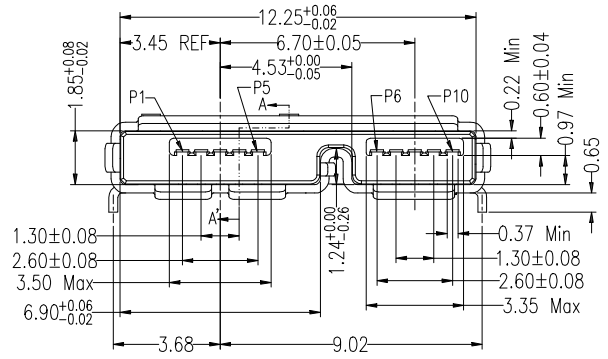
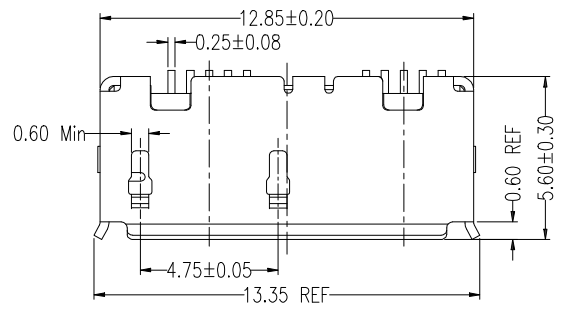


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: LCP, UL94V-0, Black.
Contacts: Phosphor Bronze, Gold Plated over Nickel 50u".
Shell: Stainless steel, 40u" Nickel Plated.
Electrical Characteristics:
Current Rating: 1.8 A(Only Pin1,5); 0.25A For Other Pin.
Dielectric Withstanding Voltage: AC 100V.
Insulator Resistance: 100MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -55°C~+85°C.
***Data Rate: 5Gbps**
***RoHS Compliant**

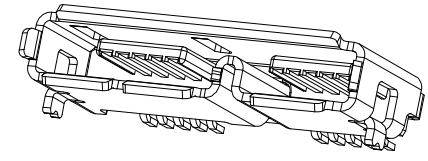

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MicA_SSTX-
7	MicA_SSTX+
8	GND_DRAIN
9	MicA_SSRX-
10	MicA_SSRX+

8973-AB 10 G 30 D2 T
Series Position G: Gold Plated 30: 30 u" D2: SMD Post Dip T: Tape & Reel Package

Tolerances	Dwg. No.	8973D02004		Title: 8973-AB Series					
.x = ±0.35	Projection			USB 3.2 Gen1 5Gbps					
.xx = ±0.25	Unit	mm	Scale	1:N		P/N: 8973-AB10G30D2T			
.xxx = ±0.15	Drawn By	Martin 12/06'23		Micro AB Type		SHEET	1/1	Ver.No.	A4