



REV.	SPECIFICATION	ECN NO.	APPD.
R9		ECN170751	

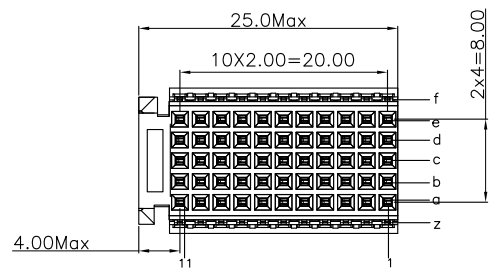




Material:

Housing: High Temperature housing UL94V-0 .
 Contacts: Copper Alloy

Electrical Characteristics:


Current Rating: 1.0A for signal pin.
 Dielectric Withstanding Voltage: AC 750V For 1 minute.
 Insulator Resistance: 10000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

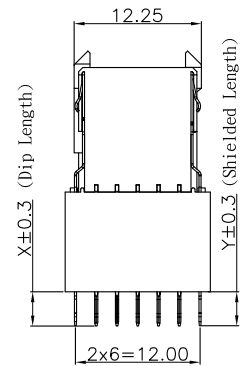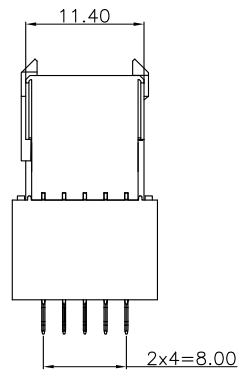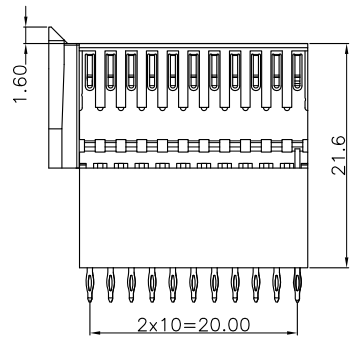


None Shielded

With Front & Back Shielded



- 9111- 7 4 C 55 1 2 1 H2 CB 30 A
- Series
- 7: Row
- 4: Female
- C: Type C
- Position
- 0: Dip Length 3.1mm
- 1: Dip Length 3.3mm
- 2: Dip Length 3.7mm
- 1: None Shielded
- 2: With Front & Back Shielded
- A: Tray Package
- 30: 30 u"
- CB: Selective Gold Plated
- H1: With Spacer 3.1mm
- H2: With Spacer 9.6mm
- Blank : Without Shielded
- 0: Shielded Length 3.1mm
- 1: Shielded Length 3.3mm
- 2: Shielded Length 3.7mm

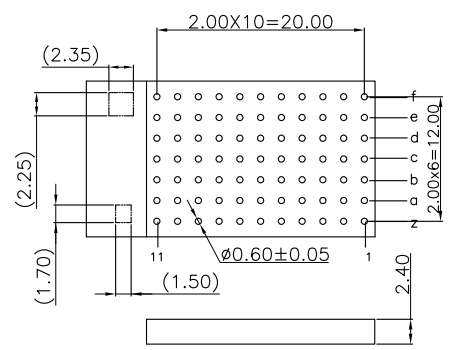

P.C.Board Layout
 (Tolerance:±0.05)

X Dip Length	0	1	2
	3.1	3.3	3.7
Y Shielded Length	0	1	2
	3.1	3.3	3.7
H Spacer Length	H1	H2	
	3.1	9.6	

Tolerances	Dwg. No.	9111D74003	
x = ±0.5	Projection	⊕ ↯	
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	LQ 07/27'17	

Title: 9111 Series
 Hard Metric Connector
 Female Straight Type C

OUPIN
 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 9111-74C55121H2CB30A

SHEET	1/1	Ver.No.	R9
-------	-----	---------	----