

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: Thermoplastic Polyester UL94V-0.

Female Contact: Copper Alloy, Tin Plated.

Spring Clamp: Metal.

Electrical Characteristics:

Voltage Rating: 160V.

Current Rating: 5.5A.

Solid Wire(AWG): 16-24.



Stranded Wire(AWG): 16-24.

Wire Strip Length: 9-10mm.




Withstanding Voltage: 1.32KV.

Operating Temperature: -55°C ~ +115°C.

***RoHS Compliant**




2P~6P Ribs on Both Sides
7P~24P No Rib

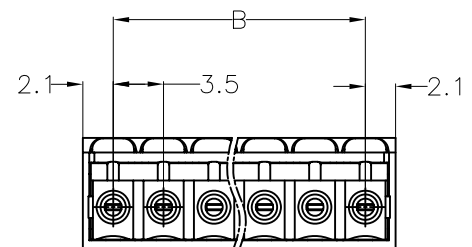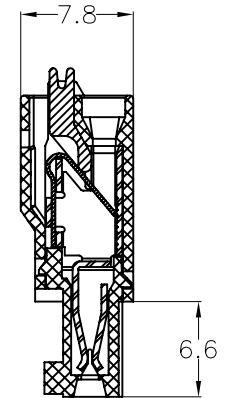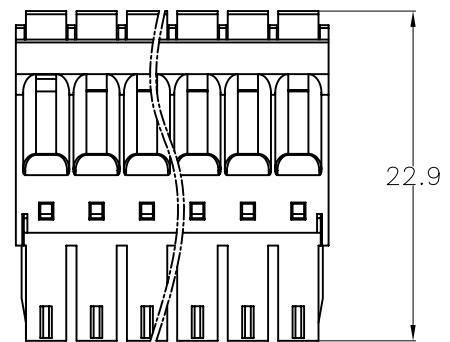

8934- Series C Pitch 3.5mm 078229 Manufacturing Code G Green CD W/O Flange xx Number of Positions B Bulk Package
 B: Black Y: Grey U: Blue

Position	2 Thru 24
Dimension	
A	No. of Positions * 3.5 +0.7
B	(No. of Positions -1) * 3.5

Tolerances	Dwg. No.	8934D02001	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8934-C078229GCDxxB
x = ±0.5	Projection		8934 Series		
.x = ±0.30	Unit	mm	Scale	1:1	
.xx = ±0.15	Drawn By	CQ 12/03'13	Scale	1:1	
			①780		SHEET
					1/1
					Ver.No.
					A1