
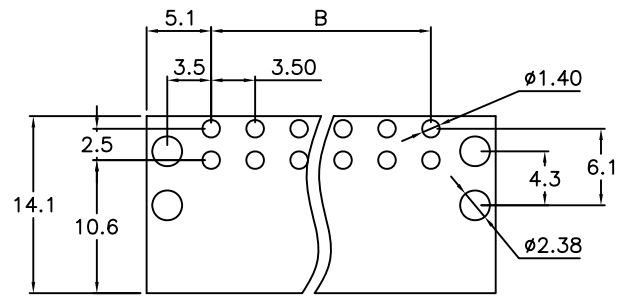

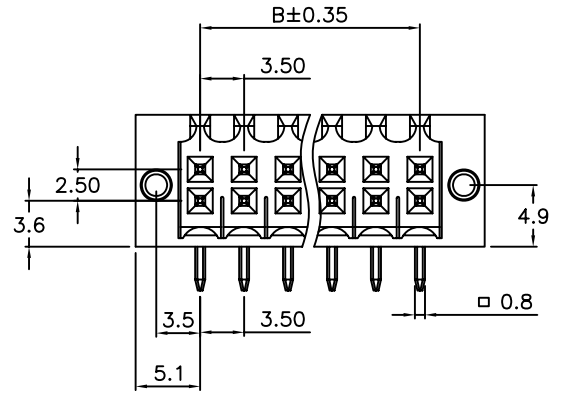


REV.	SPECIFICATION	ECN NO.	APPD.

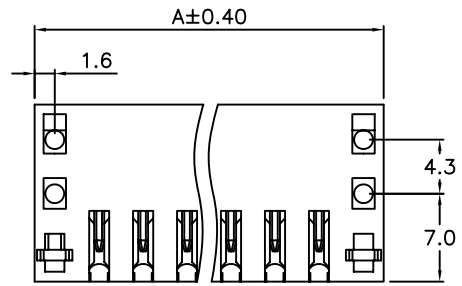

P.C.Board Layout

Material:

Housing: Thermoplastic Polyester UL94V-0.
 Contact Pin: Copper Alloy, Tin Plated.
 Flange NUT: Copper Alloy, M2.0.

Electrical Characteristics:

Voltage Rating: 150V.
 Current Rating: 7A.
 Withstanding Voltage: 1.3KV.
 Operating Temperature: -40°C~+115°C.

***RoHS Compliant**

8930- C 105141 O CA xx R B
 Series C:Pitch 3.5mm Manufacturing Code O:Orange G:Green B:Black Y:Grey U:Blue CA:With Flange No. of Positions 04:2x02 Pos. 48:2x24 Pos. R:Right Angle B: Bulk Package for 4~8Pos. Box Package for 10~48Pos.

Position	4 Thre 48
Dimension	
A	(No. of Positions/2-1)*3.5+10.3
B	(No. of Positions/2-1)*3.5

Tolerances	Dwg. No.	8930D01008
x = ±0.5	Projection	\oplus \triangleleft
.x = ±0.30	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Sunny 08/15'12

Title:
8930 Series
3.5mm Terminal Block
(8300-xxMTR51-08)

OUPIN
 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 8930-C1051410CAxxRB

SHEET	1/1	Ver.No.	A3
-------	-----	---------	----

①780