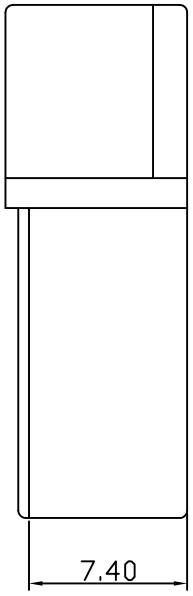
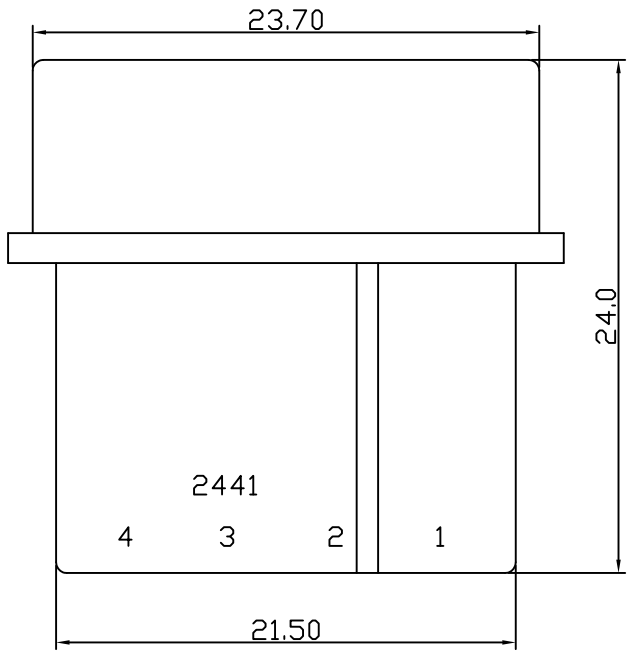
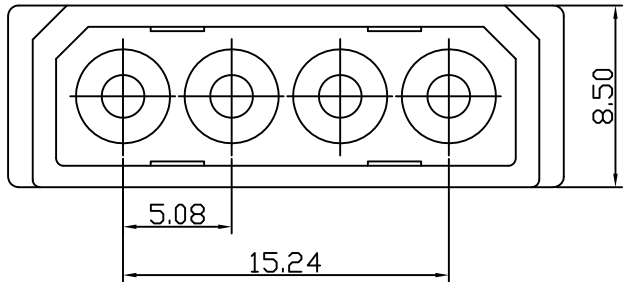




REV.	SPECIFICATION	ECN NO.	APPD.



Material:
Housing: Thermoplastic Polyester UL94V-2.
Electrical Characteristics:
Dielectric Withstanding Voltage: AC 1500V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 100V.
Operating Temperature: -25°C ~ +85°C .
***RoHS Compliant**

4874- 04 M H B
Series No.of Position Male Housing Bulk Package

Tolerances x = ±0.50 .x = ±0.35 .xx = ±0.25	Dwg. No.	4874H01001		Title: 4874 Series Housing Male Type Pitch 5.08mm	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.				
	Projection								P/N: 4874-04MHB
	Unit	mm	Scale		1:1	SHEET	1/1	Ver.No.	
	Drawn By	Vic Lyu11/13'14			①704				