



REV.	SPECIFICATION	ECN NO.	APPD.


T11

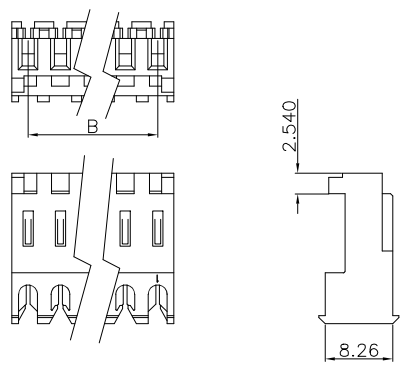


T12

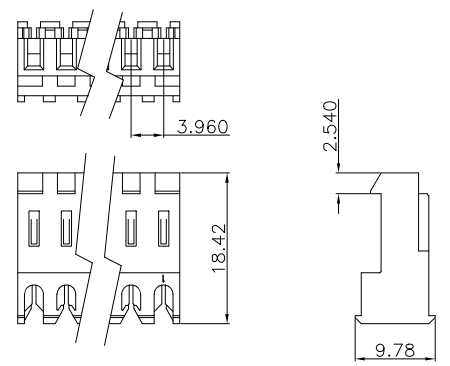


T21

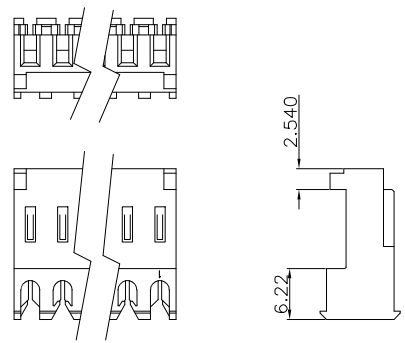

T22

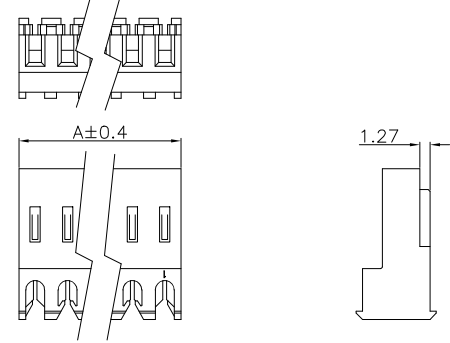

Cover



Material:

Housing: PA66, UL94V-2
 Contacts: Phospor Bronze, 80u" Tin Plated over Nickel 20u".
 Recommend Wire: 18AWG to 26AWG

Electrical Characteristics:

Current Rating: 7 AMP.
 Dielectric Withstanding Voltage: AC 1500V.
 Insulator Resistance: 1000MΩ min.
 Contact Resistance: 10mΩ max.
 Operating Temperature: -40°C~ +105°C.

***RoHS Compliant**

Dimension		
Positions	A	B
02	7.92	3.96
03	11.88	7.92
04	15.84	11.88
05	19.80	15.84
06	23.76	19.80
07	27.72	23.76
08	31.68	27.72
09	35.64	31.68
10	39.60	35.64
11	43.56	39.60
12	47.52	43.56
13	51.48	47.52
14	55.44	51.48
15	59.40	55.44
16	63.36	59.40
17	67.32	63.36
18	71.28	67.32

4777-A xx H T 1 1 C R B -G30
 Series
 02~18 No. of Positions
 I.D.C Housing
 T:Feed-Thru type
 1:With Polarizing Ramp
 2:Without Locking Ramp
 1:With Polarizing Tabs
 2:Without Polarizing Tabs
 Blank: Tin Plated
 G30: Gold Plated 30u"
 B: Bulk Package
 O: Orange 18AWG
 E: Yellow 20AWG
 R: Red 22AWG
 W: White 24AWG
 U: Blue 26AWG
 N: Without cover
 C: With cover

Tolerances	Dwg. No.	4777D02001		Title:	
.x = ±0.40	Projection			4777-A Series 3.96mm I.D.C Type	
.xx = ±0.25	Unit	mm	Scale		1:N
.xxx = ±0.08	Drawn By	Martin 12/26'23			

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 4777-AxxHT11CRB-G30
 SHEET 1/1 Ver.No. A5