


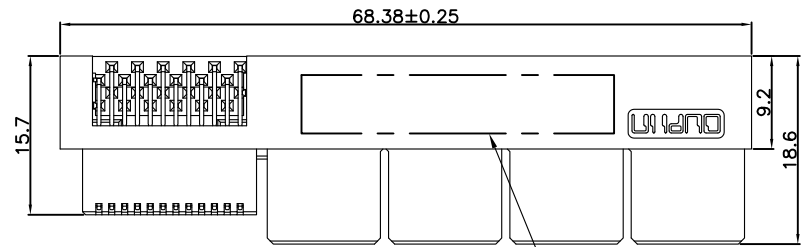



REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN230636	




Section B-B

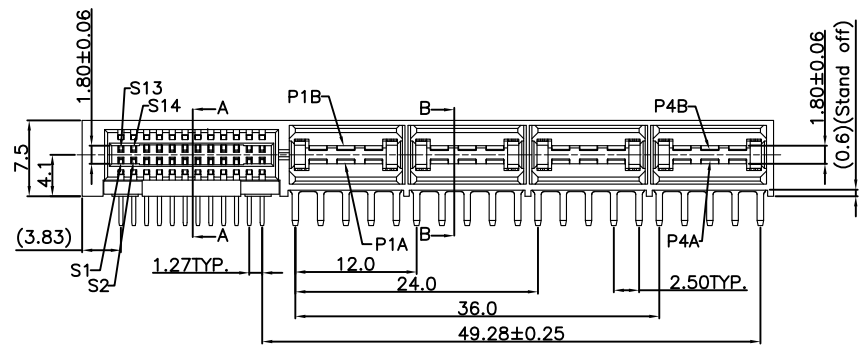

Section A-A

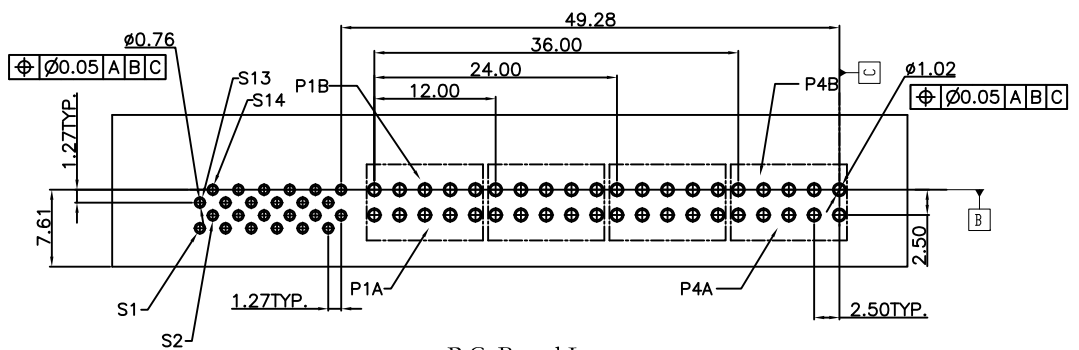

P.C. Board Layout  
(Tolerance:±0.05)

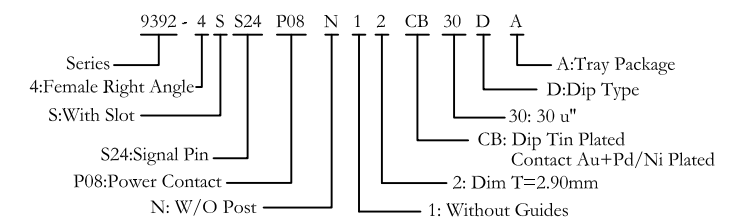

**Material and Plating:**

Housing: LCP, UL94V-0, Black.  
 Cover: LCP, UL94V-0, Black.  
 Power Contacts: High Conductivity Copper.  
 30u"Au+Pd/Ni Plated on Contact Area and 80u" Min Tin Plated on Solder Tail over Nickel 50u" Min .  
 Signal Contacts : Phosphor Bronze.  
 30u"Au+Pd/Ni Plated on Contact Area and 80u" Min Tin Plated on Solder Tail over Nickel 50u" Min .

**Electrical Characteristics:**


Current Rating: Signal Pin 1.0 A.  
 Power Pin 60 A (UL) .  
 Insulator Resistance: Signal Pin:500MΩ min. at DC 500V.  
 Power Pin:10000MΩ min. at DC 500V.  
 Dielectric Withstanding Voltage:  
 Signal Pin DC 1500V For 1 minute.  
 Power Pin DC 1500V For 1 minute.  
 Contact Resistance: Signal Pin 20mΩ max. at DC 20mA.  
 Power Pin 5mΩ max. at DC 20mA.  
 Operating Temperature: -40°C ~+105°C.

**\*RoHS Compliant**

Tolerances	Dwg. No.	9392-D0000-059	Title:
x = ±0.5	Projection		9392 Series
.x = ±0.25	Unit	mm	Low Profile Hybrid
.xx = ±0.15	Scale	1:1	Power Receptacle
	Drawn By	JCQ 06/27'23	

<b>OUPIN</b>			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9392-4SS24P08N12CB30DA			
SHEET	1/2	Ver.No.	R7

REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN230636	

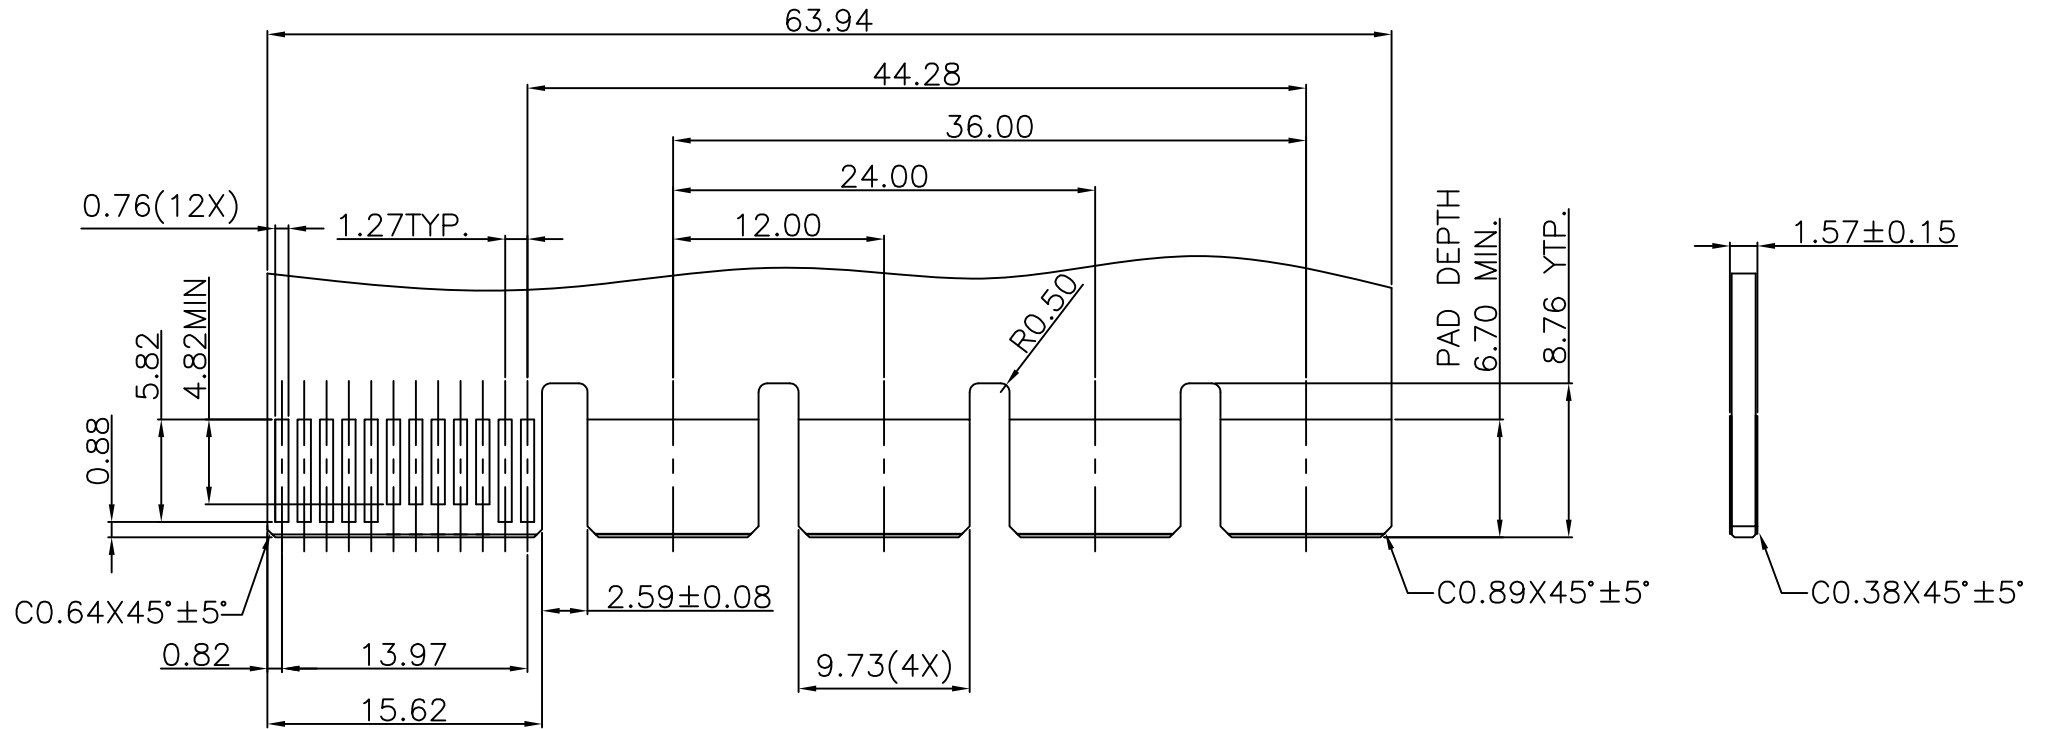

Recommended Edge Card Layout  
(Tolerance:±0.05)

Tolerances	Dwg. No.	9392-D0000-059		Title:
x = ±0.5	Projection			9392 Series Low Profile Hybrid Power Receptacle
.x = ±0.25	Unit	mm	Scale 1:1	
.xx = ±0.15	Drawn By	CQJ 06/27'23		

Title:			
9392 Series Low Profile Hybrid Power Receptacle			

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N:9392-4SS24P08N12CB30DA			
SHEET	2/2	Ver.No.	R7