

REV.	SPECIFICATION	ECN NO.	APPD.








Material:

Housing: Nylon 66 Flame Retardant UL94V-0.
 Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 800V For 1 minute.
 Insulator Resistance: 100MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -25°C ~+85°C .

***RoHS Compliant**

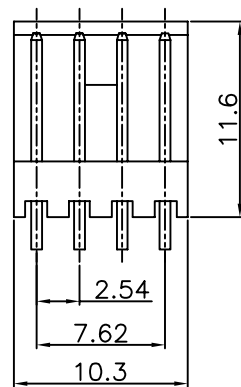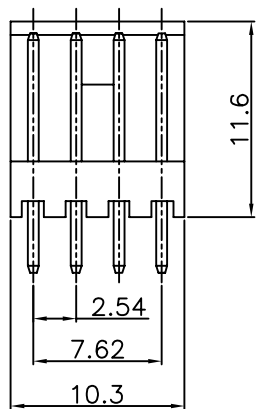

4074- 04 T x B
 Series | No. of Pin | T: Tin Plated | B: Bulk Package
 S: Straight | R: Right Angle

Tolerances	Drawn No.	4074D02002	Title:	
x = ±0.5	Projection		4074 Series Wafer	
.x = ±0.25	Unit	mm	Scale	1:1
.xx = ±0.15	Drawn By	Pony 10/01'08	Φ704	

OUPIIN			
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4074-04TxB			
SHEET	1/1	Ver.No.	A2