
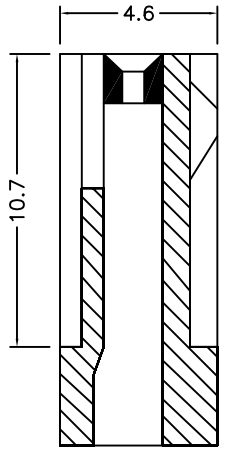
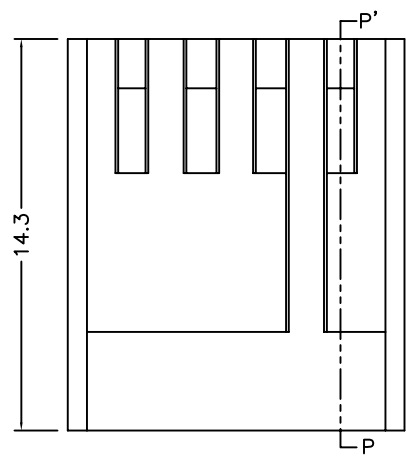




REV.	SPECIFICATION	ECN NO.	APPD.

A
B
C
D
E
F
G
H


A
B
C
D
E
F
G
H

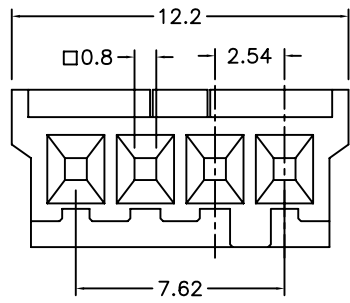


Section P-P'

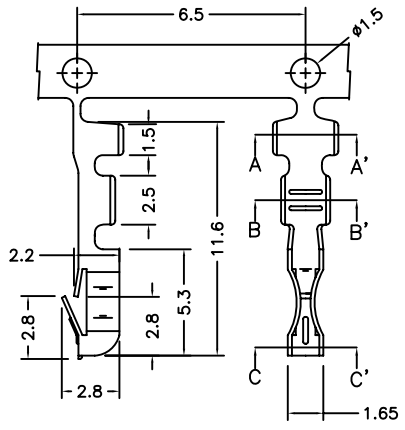

Section A-A'



Section B-B'



Section C-C'

Material:

Housing: High Temperature Plastic UL94V-2.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 1800V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.



Contact Resistance: 20m Ω max. at DC 100mA.

Operating Temperature: -25°C~+85°C.

***RoHS Compliant**

4074- 04 H B
Series Position Housing B: Bulk Package

4074- PIN-T-10K
Series T: Tin Plated 10K Pins Per Reel

Tolerances	Dwg. No.	4074H02001		Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 4074-04HB&4074-PIN-T-10K	
x = ± 0.5	Projection			4074 Series			
.x = ± 0.25	Unit	mm	Scale	Housing		SHEET	1/1
.xx = ± 0.15	Drawn By	Peggy01/19'12		Terminal		Ver.No.	A3

L

1 2 3 4 5 6 7 8 9 10 11 12