


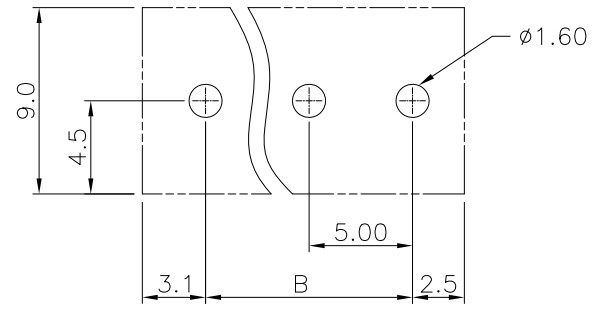


REV.	SPECIFICATION	ECN NO.	APPD.

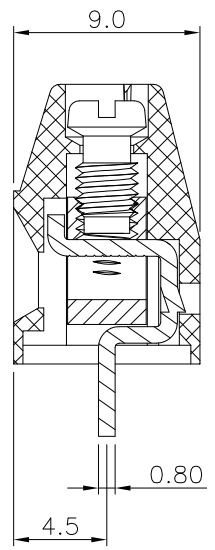

Material:
Housing: PA66, UL94V-0.
Solder Pin: Brass, Tin Plated.
Clamp: Brass, Ni Plated.
Screw: Steel, Zinc Plated, M3.
Electrical Characteristics:
Voltage Rating: 300V.
Current Rating: 16A.
Solid Wire(AWG): 12-28.
Stranded Wire(AWG): 12-28.
Torque: 3.5Lb-In.
Wire Strip Length: 6-7mm.
Withstanding Voltage: 1.6KV.
Operating Temperature: -40°C~+115°C.
***RoHS Compliant**

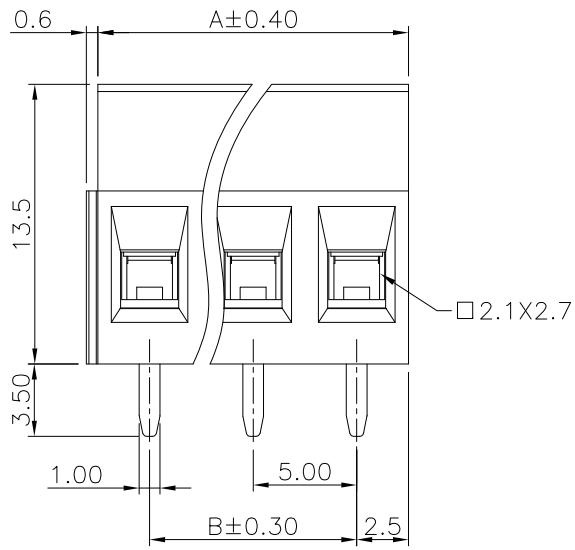

P.C. Board Layout

8932- F 090135 G AA xx S B
Series ——— F:Pitch 5.0mm ——— Manufacturing Code ———
G:Green ——— B: Bulk Package
B:Black ——— S: Straight
Y:Grey ——— No. of Positions
U:Blue ——— AA: Slotted "-"Screw

Position	2 Thru 24
Dimension	
A	No. of PositionsX5.0
B	(No. of Positions-1)X5.0

Tolerances	Dwg. No.	8932D02011	Title:
x = ±0.50	Projection		8932 Series
.x = ±0.25	Unit	mm	5.0mm Terminal Block
.xx = ±0.15	Scale	1:1	(Old P/N: 8500-xxTS11-03)
	Drawn By	Ping 01/25'19	①780

8932 Series
5.0mm Terminal Block
(Old P/N: 8500-xxTS11-03)
①780

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 8932-F090135GAxxSB			
SHEET	1/1	Ver.No.	A2