REV.	SPECIFICATION	ECN NO.	APPD.

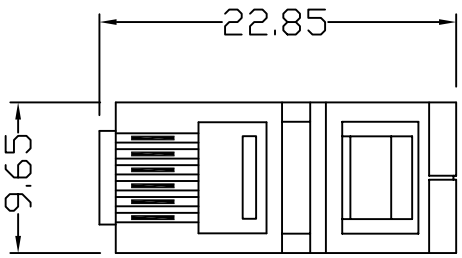



Material:

Housing: Thermoplastic Polyester UL94V-2.
Contacts: Copper Alloy.
Shield: Copper Alloy,Nickel Plated.
Plating: Gold plated on contact area over Nickel.

Electrical Characteristics:

Current Rating: 1.5 AMP.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 30m Ω max. at DC 100mA.
Operating Temperature: -40°C~+85°C.

***RoHS Compliant**

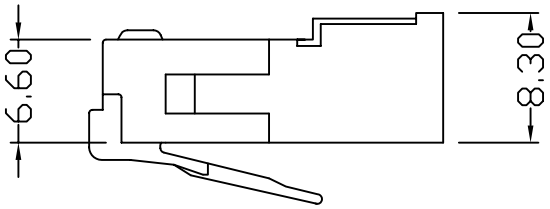

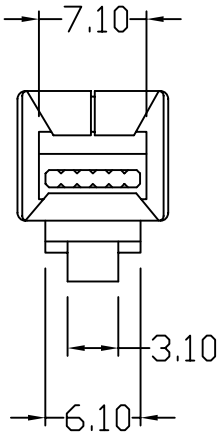



8949-A	6	6	/06	S	R	B
Series	6:6 Position	6:6 Contacts	06:6 μ″ Gold Plated 15:15 μ″ Gold Plated 30:30 μ″ Gold Plated 50:50 μ Gold Plated	S:Shield	B:Round Cable Blank:Flat Oval Cable	B:Bulk Package

Tolerances	Dwg. No.	8949D01005	Title:	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
x = ±0.5 .x = ±0.25 .xx = ±0.15	Projection		8949-A Series Modular Plug	P/N: 8949-A66/06SRB
	Unit mm	Scale 1:1		SHEET 1/1 Ver.No. A3
	Drawn By	Peggy11/11'13	①773	