

REV.	SPECIFICATION	ECN NO.	APPD.






Material:

Housing: PBT, 30% Glass Filled UL94V-0.
 Contacts: Phosphor Bronze, Gold Plated on Contact Area and Gold Flash on solder tail over Nickel 50u".

Electrical Characteristics:

Current Rating: 1.5 AMP.
 Insulator Resistance: 500MΩ min. at DC100V.
 Contact Resistance: 40mΩ max. at DC 100mA.
 Operating Temperature: -40°C~+85°C.

***RoHS Compliant**

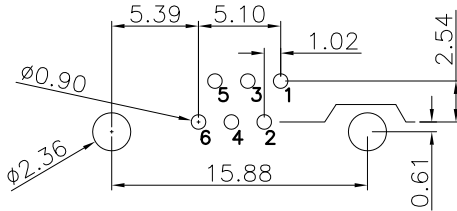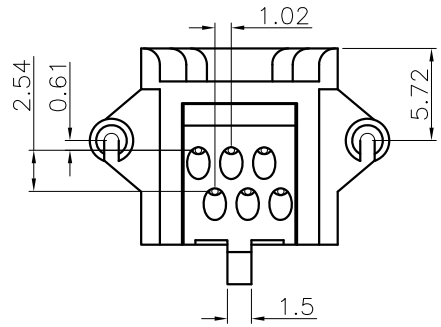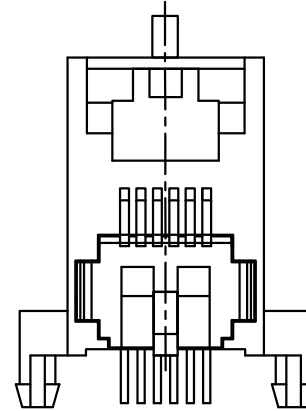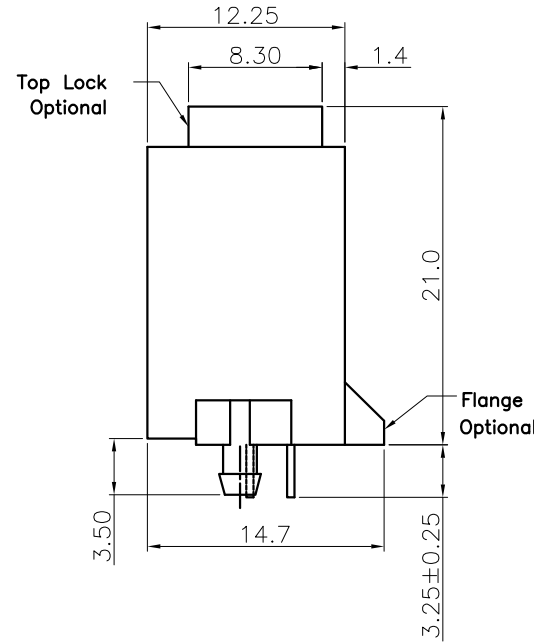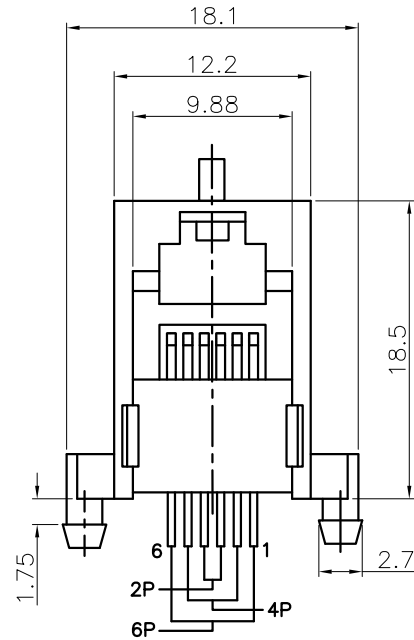

P.C. Board Layout

8949-G 6 6 -06 B A
 Series Position 4: 4 Contacts 06: 06 u" Gold Plated B: Black A: Tray Package
 6: 6 Contacts 15: 15 u" Gold Plated Y: Grey
 30: 30 u" Gold Plated
 50: 50 u" Gold Plated

Tolerances	Dwg. No. 8949D02122	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8949-G66-06BA			
x = ±0.5	Projection						
.x = ±0.25	Unit mm	Scale	1:1	8949-G Series Modular Jack ①563			
.xx = ±0.15	Drawn By	Lan12/02'16					
				SHEET	1/1	Ver.No.	A4