
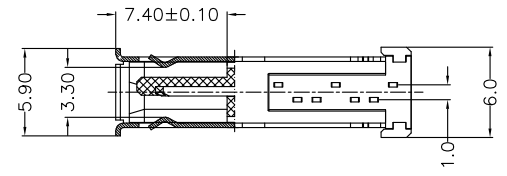
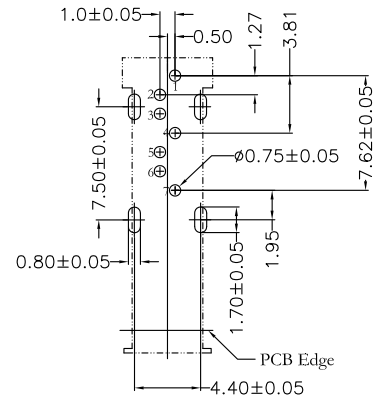
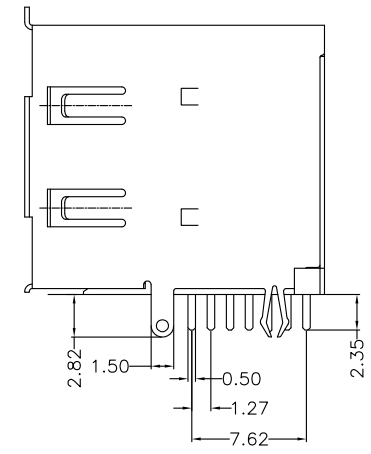
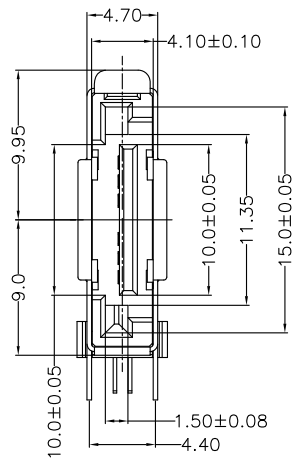


REV.	SPECIFICATION	ECN NO.	APPD.

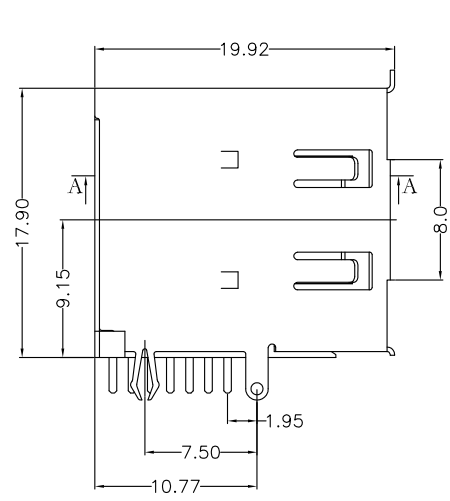

Section A-A

P.C.Board Layout

**Material:**  
Housing: High Temperature Plastic UL94V-0.  
Contacts: Copper Alloy.

**Electrical Characteristics:**  
Current Rating: 1.5 A.  
Dielectric Withstanding Voltage: 500V AC.  
Insulator Resistance: 1000 MΩ min.  
Contact Resistance: 30mΩ max.  
Operating Temperature: -55°C ~ +125°C.

**\*RoHS Compliant**

7904-07 M C 15 UR B A - 04  
Series Position M:Male C: Selective 15:15// UR:Upright B:Black A: Tray Internal Code  
Gold Plated Type Package Code

Signal Name	
Pin Number	eSATA
1	GND
2	RX+
3	RX-
4	GND
5	TX-
6	TX+
7	GND

<b>Tolerances</b>	<b>Dwg. No.</b>	7904D01002	<b>Title:</b>		 <b>OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.</b> P/N: 7904-07MC15URBA-04 SHEET 1/1 Ver.No. A2
x = ±0.5	<b>Projection</b>		7904 Series		
.x = ±0.38	<b>Unit</b>	mm	<b>Scale</b>	1:1	
.xx = ±0.25	<b>Drawn By</b>	Peggy04/06'12	<b>①705</b>		