


REV.	SPECIFICATION	ECN NO.	APPD.







Material and Plating:

Housing:LCP, 30% Glass Filled,UL94V-0 , BLACK.
 Power Contacts:High Conductivity Copper .
 Gold plated on Contact Area and 80~160u" Matte Tin
 Plated on Solder Tail over nickel 50~120u" under plated.


Electrical Characteristics:

Current Rating: UL Certified 12.5A, UL/CSA certified 7A.
 Dielectric Withstanding Voltage:DC 1000V For 1 minute.
 Insulator Resistance: 5000MΩ min. at DC 500V.
 Contact Resistance: 2.5mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+105°C .


***RoHS Compliant**

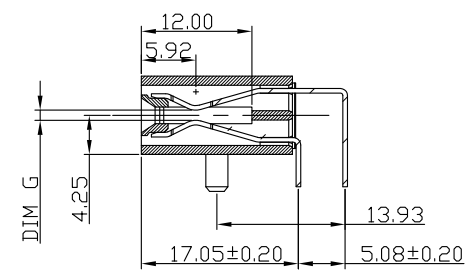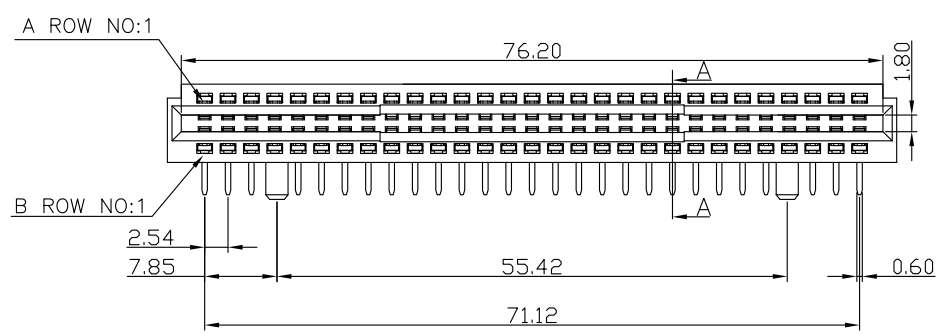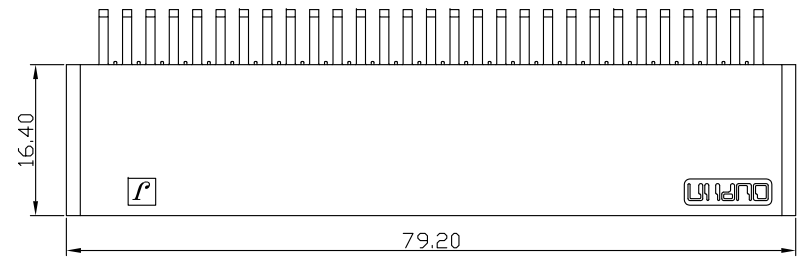





SECTION A-A

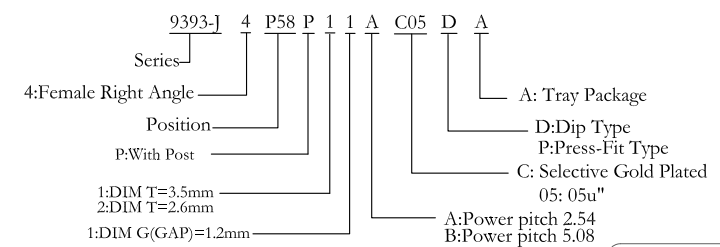

Proposal only

Tolerances	Dwg. No.	9393-D000-034	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9393-J4P58P11AC05DA
x = ±0.5	Projection		9393-J Series		
.x = ±0.25	Unit	mm	Scale	1:1	
.xx = ±0.15	Drawn By	Scott 11/11'16	Power Edge Connector		SHEET
					1/2
					Ver. No.
					X3

REV.	SPECIFICATION	ECN NO.	APPD.

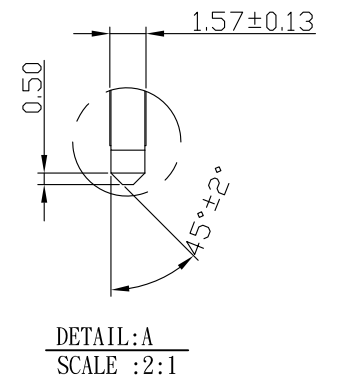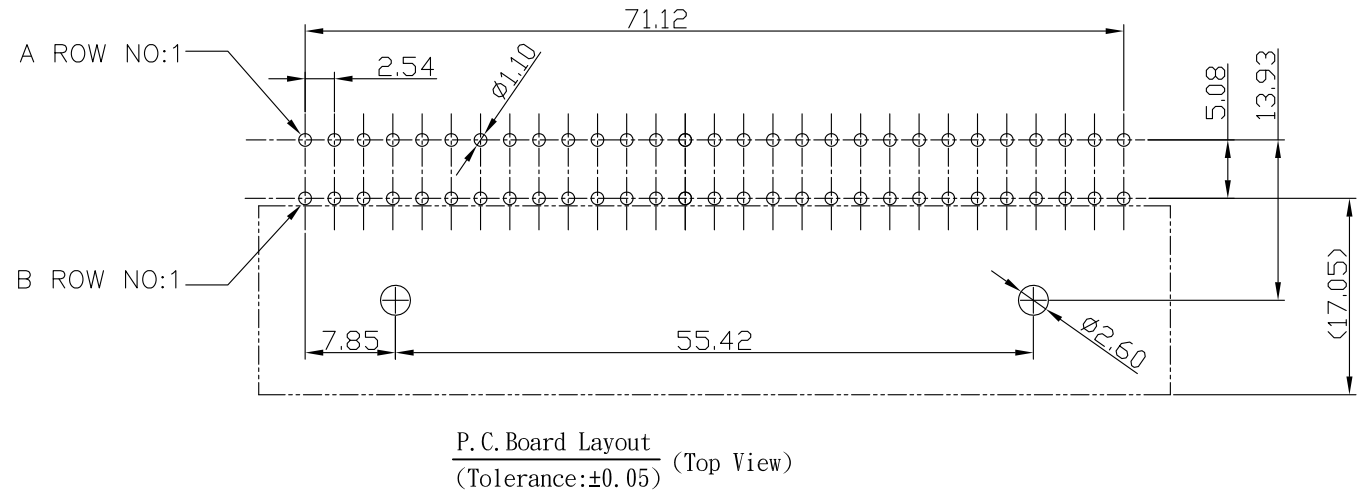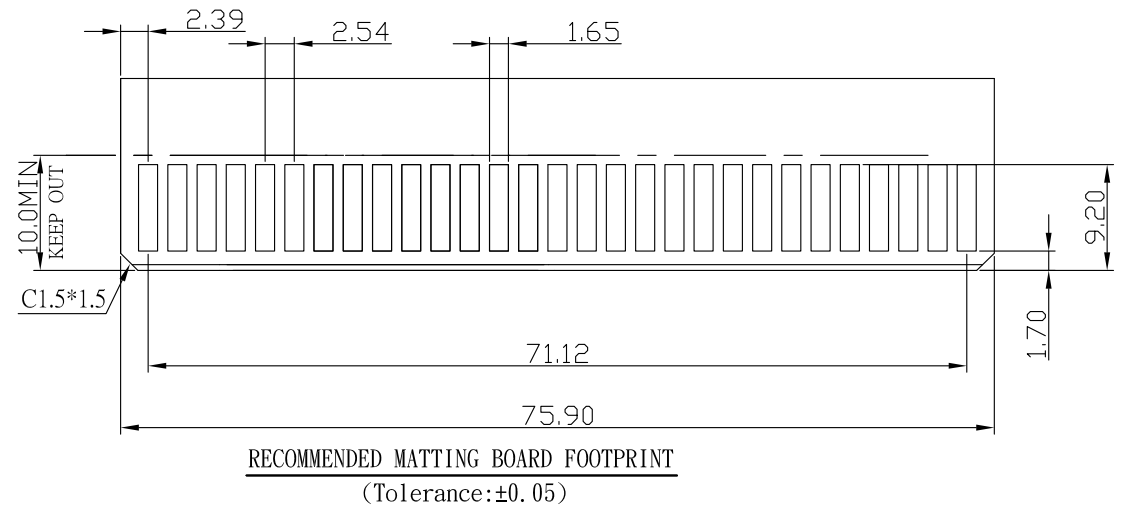

Proposal only

Tolerances x = ±0.5 .x = ±0.25 .xx = ±0.15	Dwg. No.	9393-D000-034		Title: 9393-J Series Power Edge Connector	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9393-J4P58P11AC05DA				
	Projection								
	Unit	mm	Scale		1:1	SHEET	2/2	Ver. No.	X3
	Drawn By	Scott 11/11'16							