
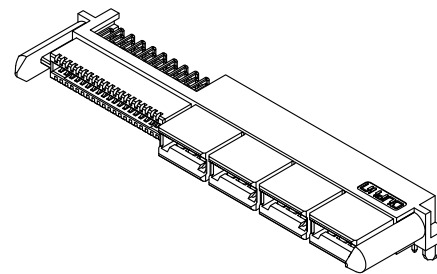


REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN230636	

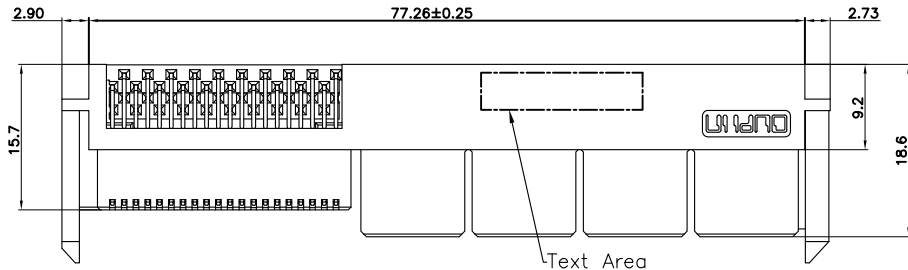




Material and Plating:

Housing: LCP, UL94V-0, Black.
 Power Contacts: High Conductivity Copper.
 30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .
 Signal Contacts : Phosphor Bronze.
 30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .


Electrical Characteristics:

Current Rating: Signal Pin 1.0 AMP.
 Power Pin 30 AMP.
 Insulator Resistance: Signal:1000MΩ min. at DC 500V.
 Power:5000MΩ min. at DC 500V.
 Dielectric Withstanding Voltage:
 Signal Pin DC 500V For 1 minute.
 Power Pin DC 1000V For 1 minute.
 Contact Resistance: Signal Pin 45mΩ max. at DC 20mA.
 Power Pin 5.0mΩ max. at DC 20mA.
 Operating Temperature: -40°C ~+105°C .


***RoHS Compliant**

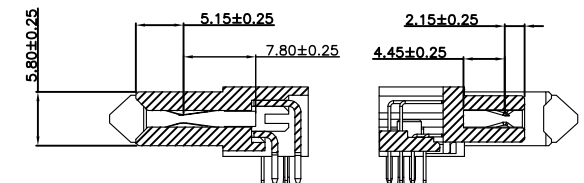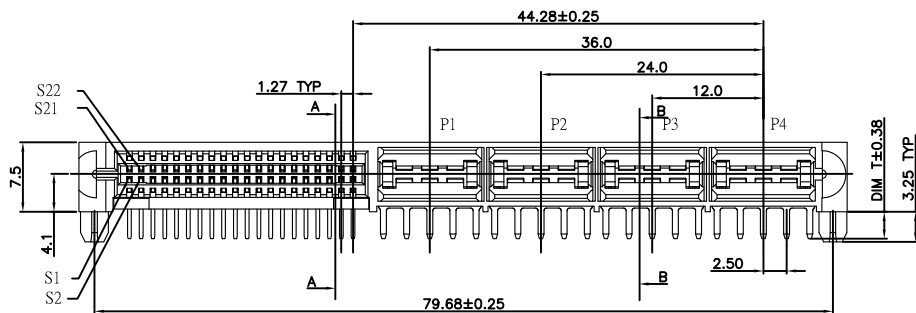

Section B-B Section A-A

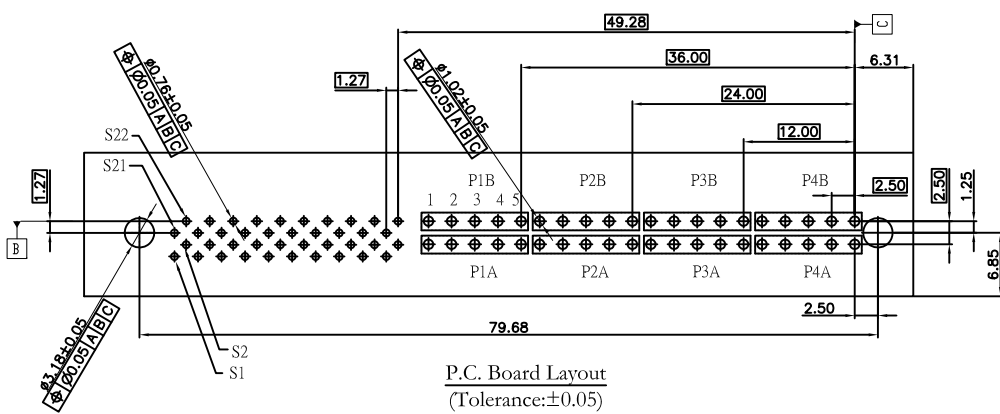


P.C. Board Layout
(Tolerance:±0.05)

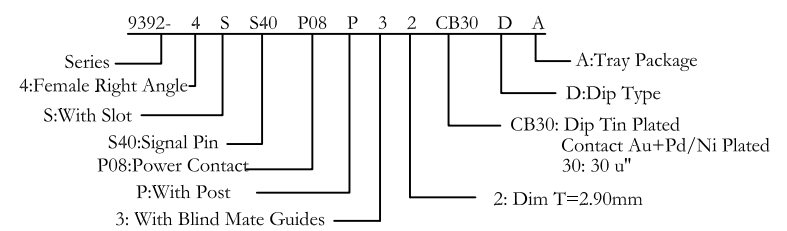


Tolerances	Dwg. No.	9392-D0000-079	Title:		9392 Series Low Profile Hybrid Power Receptacle	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.				
x = ±0.5	Projection		Scale			1:1	P/N: 9392-4SS40P08P32CB30DA			
.x = ±0.25	Unit	mm	Drawn By			JCQ 06/27'23	SHEET	1/2	Ver. No.	R2
.xx = ±0.15										

REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN230636	

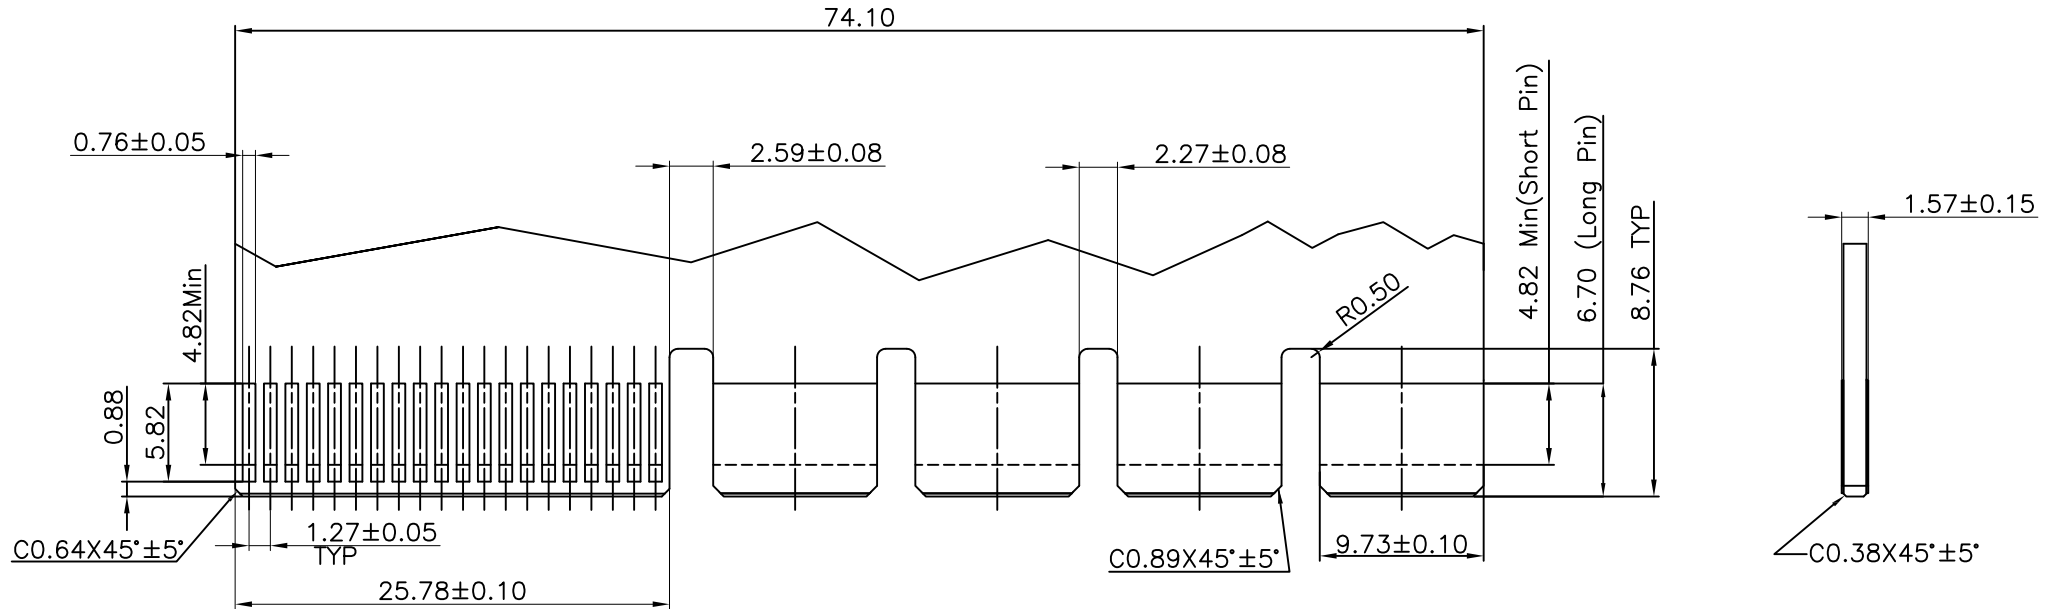

Recommended Edge Card Layout
(Tolerance:±0.05)

Tolerances	Dwg. No.	9392-D0000-079		Title:	
x = ±0.5	Projection			9392 Series Low Profile Hybrid Power Receptacle	
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	JCQ 06/27'23			

 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N:9392-4SS40P08P32CB30DA			
SHEET	2/2	Ver. No.	R2