

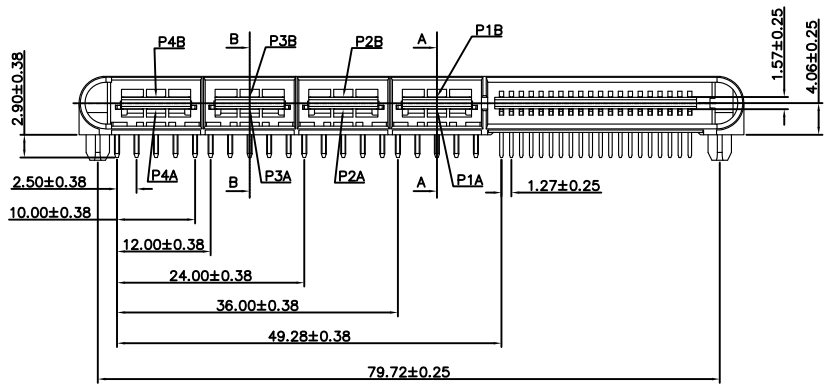
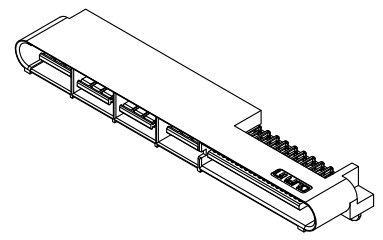





REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN230636	

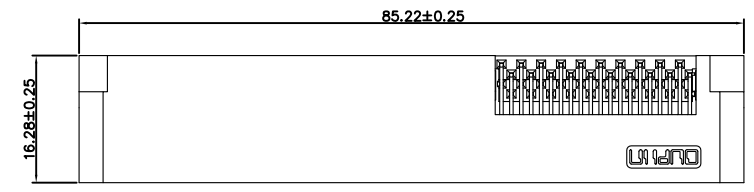

Material and Plating:
Housing: LCP, UL94V-0, BLACK.
Power Contacts: High Conductivity Copper.
30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .
Signal Contacts : Brass.
30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over nickel 50u" Min .

Electrical Characteristics:
Current Rating: Signal Pin 1.0 AMP.
Power Pin 30 AMP.
Insulator Resistance: Signal:1000MΩ min. at DC 500V.
Power:5000MΩ min. at DC 500V.
Dielectric Withstanding Voltage:
Signal Pin DC 500V For 1 minute.
Power Pin DC 1000V For 1 minute.
Contact Resistance: Signal Pin 45mΩ max. at DC 20mA.
Power Pin 5.0mΩ max. at DC 20mA.
Operating Temperature: -40°C ~+105°C .

***RoHS Compliant**
Notes:
P2A,P2B,P3A,P3B Power Pin to The Top Distance is 0.65mm.
P1A,P1B,P4A,P4B Power Pin to The Top Distance is 2.92mm.

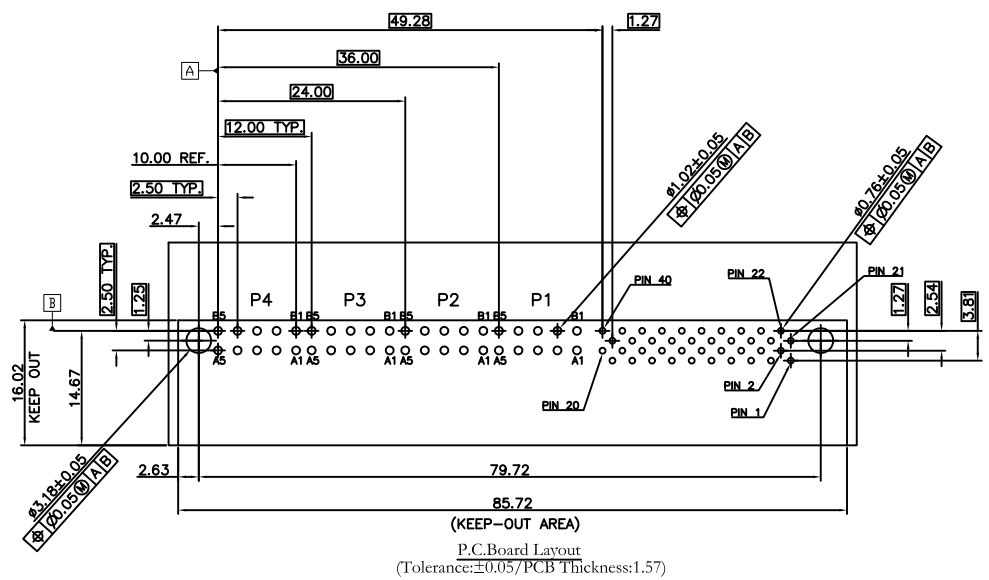

Series 9392- 1 P08 S40 P 3 2 CB30 D A -A001 Internal Code
1: Male Right Angle
P10: Power Contact
S40: Signal Contact
P: With Post
3: With Blind Mate Guides
2: Dim T=2.90mm
A: Tray Package
D: Dip Type
CB30: Dip Tin Plated Contact Au+Pd/Ni Plated 30: 30 u"

Tolerances	Dwg. No.	9392-D0000-076		Title:		
x = ±0.5	Projection			9392 Series Low Profile Hybrid Power Plug		
.x = ±0.25	Unit	mm	Scale			1:1
.xx = ±0.15	Drawn By	JCQ 06/27'23				

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9392-1P08S40P32CB30DA-A001			
SHEET	1/1	Ver. No.	R2