


REV.	SPECIFICATION	ECN NO.	APPD.

**Material:**  
Housing: PBT, UL94V-0, Gray.  
Contacts: Brass, Gold Plated on Contact Area and Tin Plated on Wire Cutting Area over Nickel.

**Electrical Characteristics:**  
Current Rating: 2 AMP.  
Dielectric Withstanding Voltage: AC 1000V.  
Insulation Resistance: 1000MΩ min..  
Contact Resistance: 30mΩ max.  
Operating Temperature: -40°C~+105°C.  
**\*RoHS Compliant**

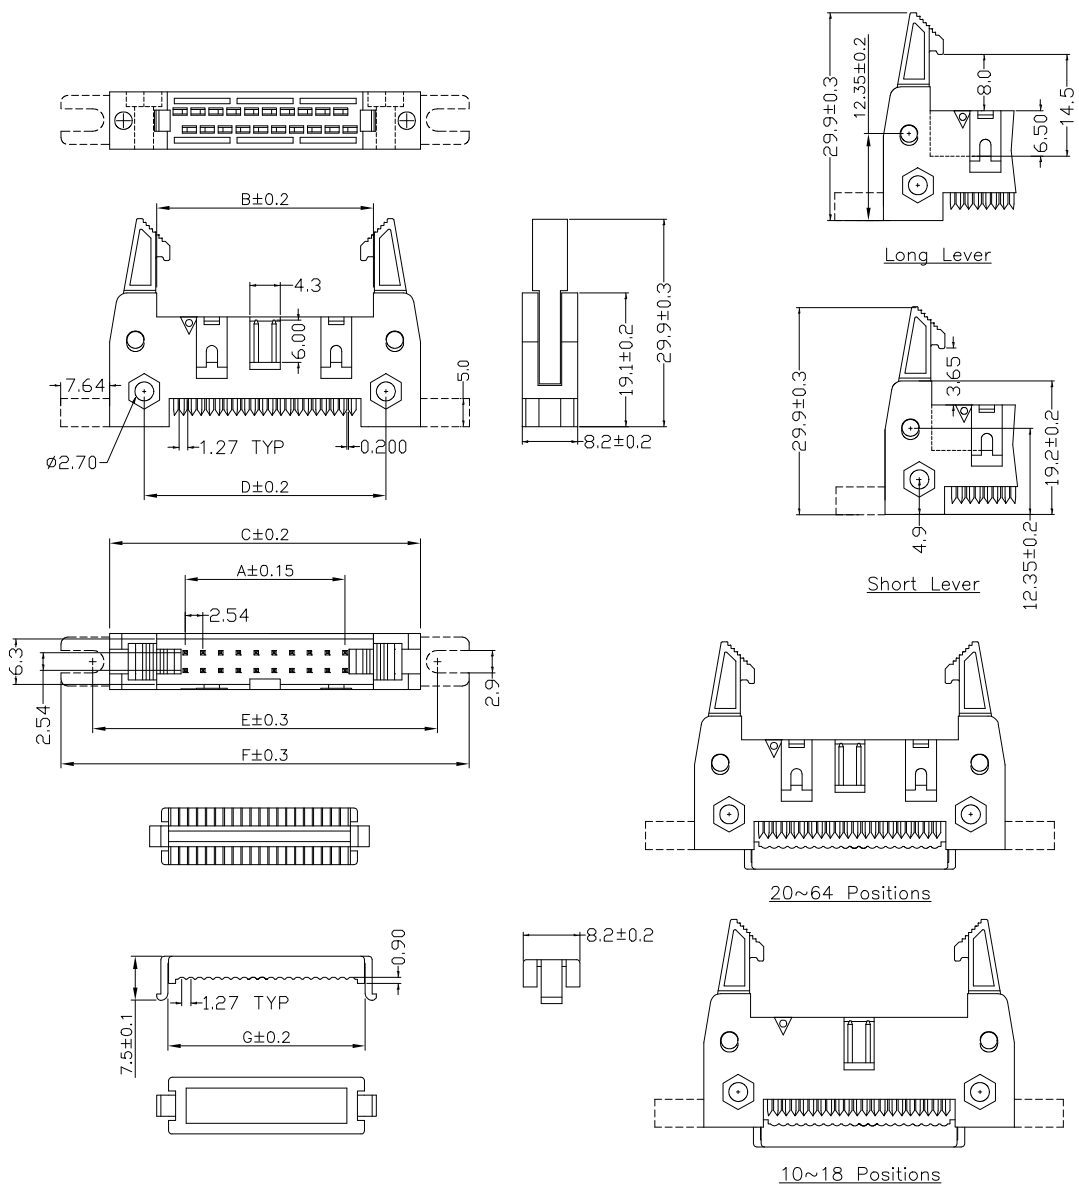

Series — 3017-A  
Positions — xx  
C: Selective Gold Plated  
00: Gold Flash  
Y: Grey  
A: Tray Package  
1: With Long Lever  
2: With Short Lever  
1: With Mounting Ears  
2: Without Mounting Ears

Positions	Dimension						
	A	B	C	D	E	F	G
10	10.16	18.20	31.92	21.80	39.10	47.20	15.20
14	15.24	23.28	37.00	26.88	44.18	52.28	20.28
16	17.78	25.82	39.54	29.42	46.72	54.82	22.82
20	22.86	30.90	44.62	34.50	51.80	59.90	27.90
24	27.94	35.98	49.70	39.58	56.88	64.98	32.98
26	30.48	38.52	52.24	42.12	59.42	67.52	35.52
30	35.56	43.60	57.32	47.20	64.50	72.60	40.60
34	40.64	48.68	62.40	52.28	69.58	77.68	45.68
40	48.26	56.30	70.02	59.90	77.20	85.30	53.30
50	60.96	69.00	82.72	72.60	89.90	98.00	66.00
60	73.66	81.70	95.42	85.30	102.60	110.70	78.70
64	78.74	86.78	100.50	90.38	107.68	115.78	83.78

Tolerances	Dwg No.	S0220210611-01	
x. = ±0.3	Projection	⊕	⚠
.x = ±0.2	Unit	mm	Scale 1:N
.xx = ±0.1	Drawn By	Martin 06/11'21	

Title: 3017-A Series  
I.D.C.Plug 2.54mm(0.100')  
① 607

<b>OUPIIN</b>			
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 3017-AxxC00YxxA			
SHEET	1/1	Ver.No.	X1