

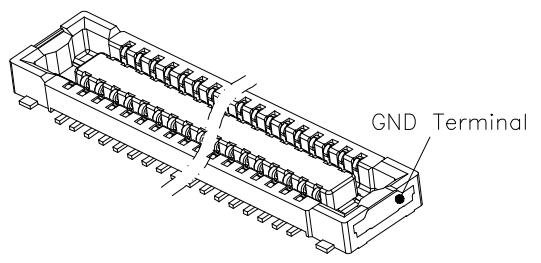
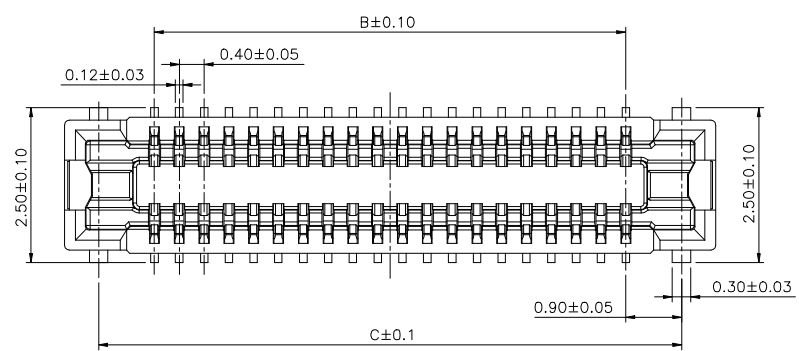



REV.	SPECIFICATION	ECN NO.	APPD.

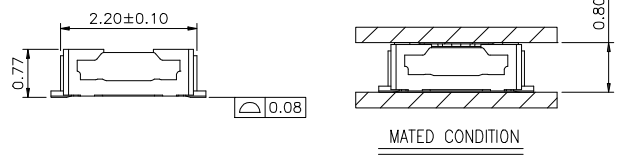


Material:
Housing: LCP, UL94V-0, Black.
Contact: Phosphor Bronze, Gold Plated on Contact Area and Gold Flash on Solder tail over Nickel.
Solder Tab: Phosphor Bronze, Gold Flash on Solder tail over Nickel.
GND Terminal: Phosphor Bronze, Gold Plated.
Electrical Characteristics:
Current Rating: 0.3 AMP.
Voltage Rating: AC 60V.
Dielectric Withstanding Voltage: AC 150V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 90mΩ max.
Operating Temperature: -55°C~+85°C.
***RoHS Compliant**



2379- xx F G 00 D N T
 Series ———
 No. of Positions ———
 F: Female ———
 G: Gold Plated ———
 T: Tape & Reel Package
 N: Without Post
 D: SMD Type
 00: Gold Flash

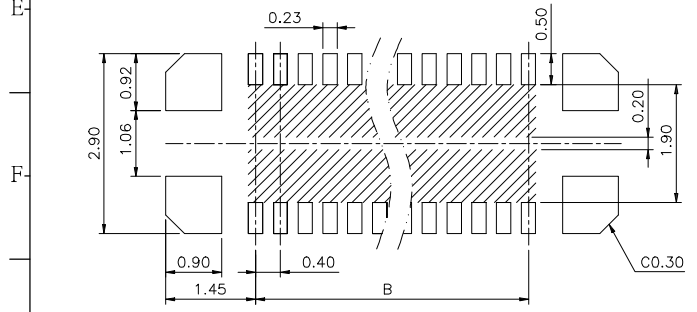

P.C.BOARD LAYOUT (NO PATTERNS)
 (TOLERANCE: ±0.03)

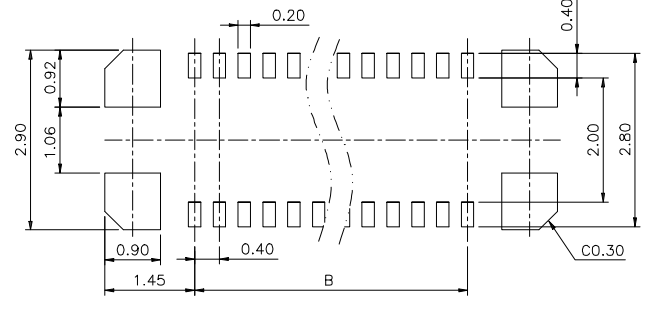

RECOMMENEN METAL MASK LAYOUT (NO PATTERNS)
 T=0.08mm

"*" Available Position			
Positions	A	B	C
10	4.50	1.60	3.40
16	5.70	2.80	4.60
24	7.30	4.40	6.20
30	8.50	5.60	7.40
* 34	9.30	6.40	8.20
* 40	10.50	7.60	9.40
50	12.50	9.60	11.40
60	14.50	11.60	13.40

Tolerances .x = ±0.25 .xx = ±0.15 .xxx = ±0.10	Dwg No.	S2320201124-03	Title:		2379 Series Pitch 0.4mm Female Board to Board Connector	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 2379-xxFGOODNT		
	Projection		Unit	mm			Scale	1:N
	Drawn By	Emma	12/01'20	①567			SHEET	1/1