
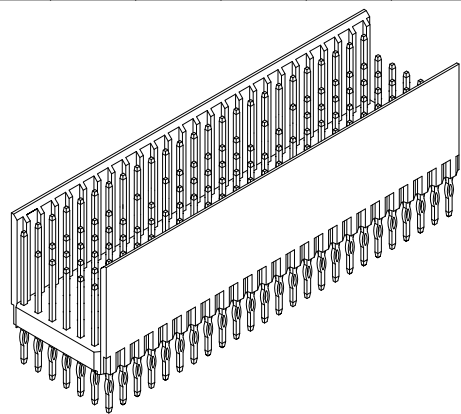


REV.	SPECIFICATION	ECN NO.	APPD.
R1			

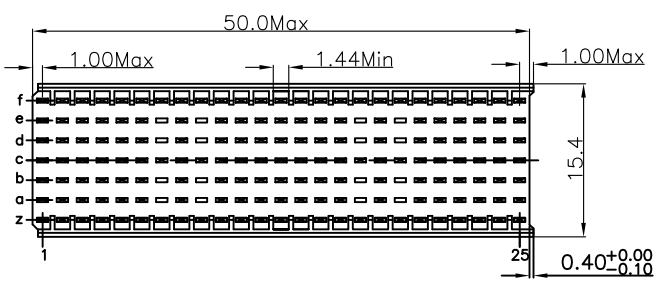

Material:



Housing: Thermoplastic Polyester Glass Filled UL94V-0
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 750V For 1 minute.
 Insulator Resistance: 10000MΩ min.at DC 500V.
 Contact Resistance: 20mΩ max.at DC 100mA.
 Operating Temperature: -55°C ~ +125°C.


***RoHS Compliant**

2.00X6=12.00±0.10

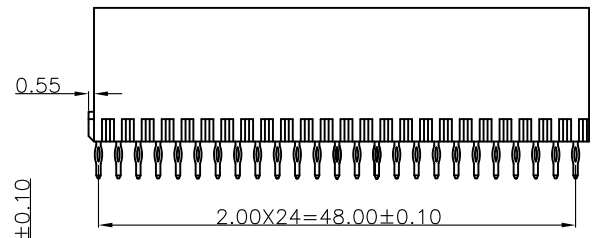



f	B	B	B	B	B	C	C	B	B	B	B	B	B	C	C	B	B	B	B	B					
e	A	A	B	A	A	B	B	B	A	A	B	A	A	B	B	B	A	A	B	A	A				
d	A	A	B	A	A	B	B	B	A	A	B	B	B	A	A	B	B	B	A	A	A				
c	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B				
b	A	A	B	A	A	B	B	B	A	A	B	A	A	B	B	B	A	A	B	A	A				
a	A	A	B	A	A	B	B	B	A	A	B	B	B	A	A	B	B	B	A	A	A				
z	B	B	B	B	B	C	C	B	B	B	B	B	B	C	C	B	B	B	B	B	B				
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25

CONTACT LAYOUT

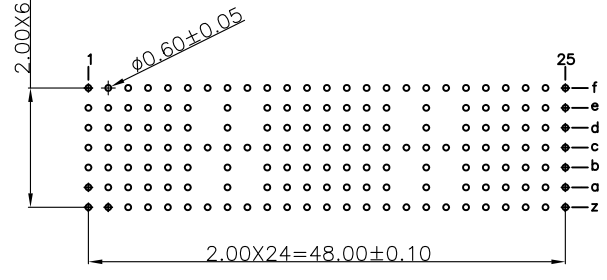

P.C. Board Layout
(Top View)

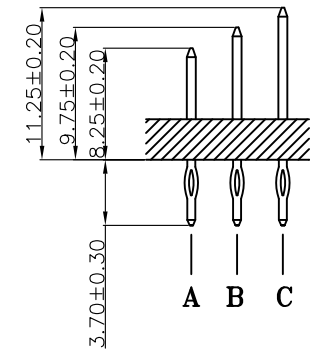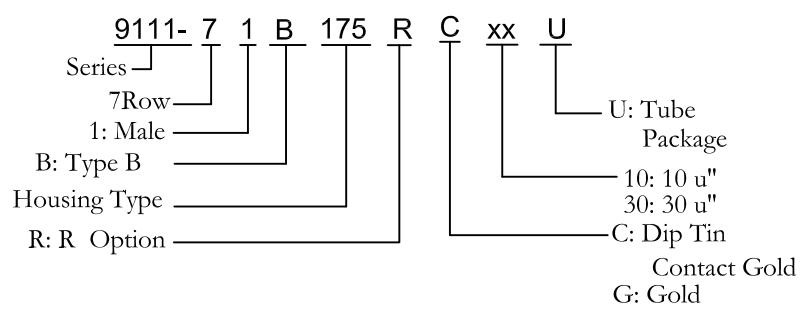

Tolerances	Dwg. No.	9111D71091		Title:	
x = ±0.5	Projection	⊕		9111 Series	
.x = ±0.25	Unit	mm	Scale	2.00 Haed Metric	
.xx = ±0.15	Drawn By	Zhu QL	08/15'12	Connectors Male	
				Type B-25	

9111 Series
 2.00 Haed Metric
 Connectors Male
 Type B-25

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-71B175RCxxU			
SHEET	1/1	Ver.No.	R1