
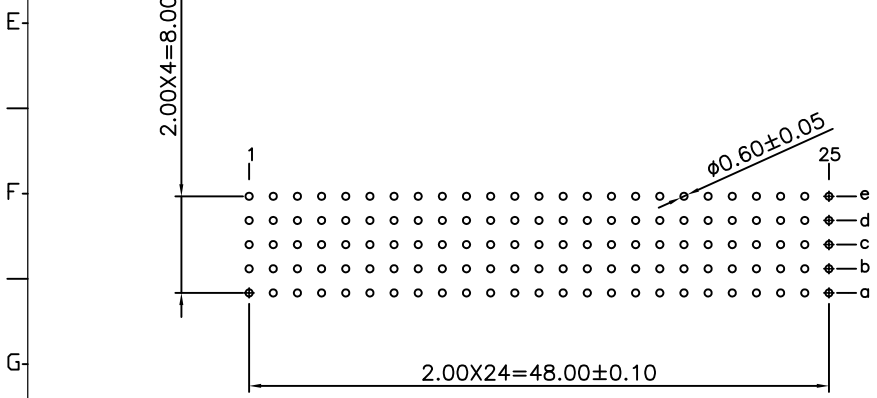
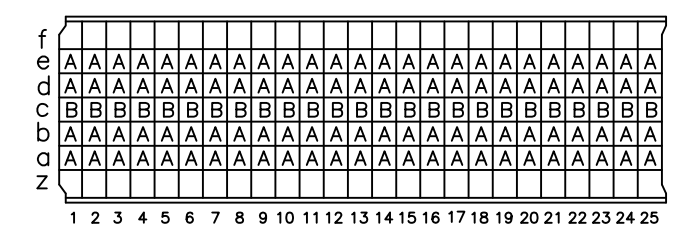
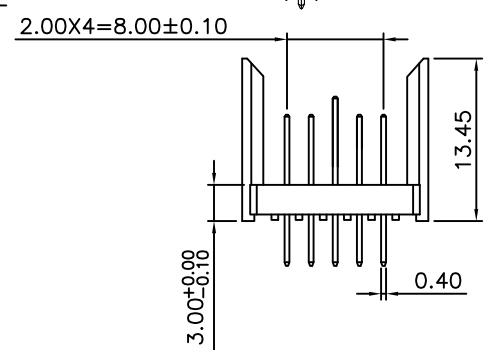


REV.	SPECIFICATION	ECN NO.	APPD.
R1			

Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0
Contacts: Copper Alloy.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min.at DC 500V.
Contact Resistance: 20mΩ max.at DC 100mA.
Operating Temperature: -55°C ~ +125°C.


***RoHS Compliant**

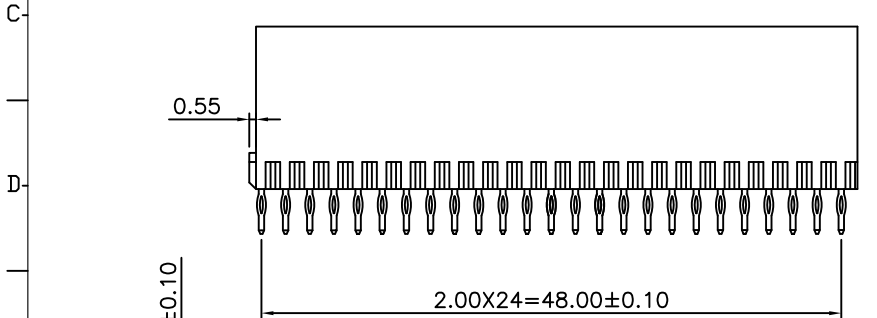



9111- 7 1 B 175 L C xx U

Series: 7Row
1: Male
B: Type B
Housing Type
L: L Option

U: Tube Package
10: 10 u"
30: 30 u"
C: Dip Tin
Contact Gold
G: Gold

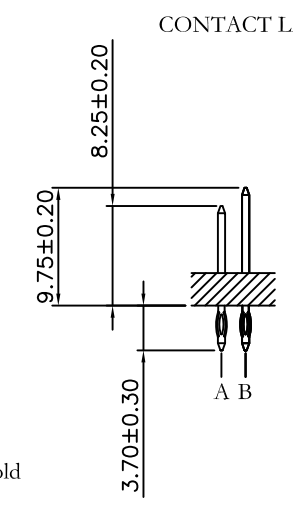

P.C. Board Layout
(Top View)

Tolerances	Dwg. No.	9111D71056	Title:		 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9111-71B175LCxxU SHEET 1/1 Ver.No. R1
x = ±0.5	Projection		9111 Series		
.x = ±0.25	Unit	mm	2.00 Hard Metric		
.xx = ±0.15	Scale	1:1	Connectors Male		
	Drawn By	Zhu QL 08/15'12	Type B-25		