

Part List


Connector	MiniSAS HD 8i Plug, PCB Kit, 30u"Gold Plated.
Wire	30AWG.
SAS Cable	32AWG or 30AWG, Tinned, 85ohm or 100ohm ,UL, 12G.
Dust Cover	PE, Black.
Acetate Tape	Black.
Expando Tube	Black.
Masking Tape	Black.
Label	Synthetic Paper, W60mm, White
*RoHS Compliant	

NOTE:

- 1.Electrical Mechanical Performance Shall Be Meet SAS3.0 Specification.
- 2.The Cable Assembly Shall Meet Below Impedance Requirement:
 Mated Impedance: 100 ±15% Ohms@Rise Time:70ps (20%~80%)
 Cable Impedance: 100±10% Ohms@Rise Time:70ps (20%~80%)

OUPIIN
 P/N → MSH8S+MSH8SXLCMxxAxxGxx
 Description → Mini SAS HD 8i STR xxohm SAS3.0 xxCM
 Date Code → DD/MM/YY


LABEL DETAIL

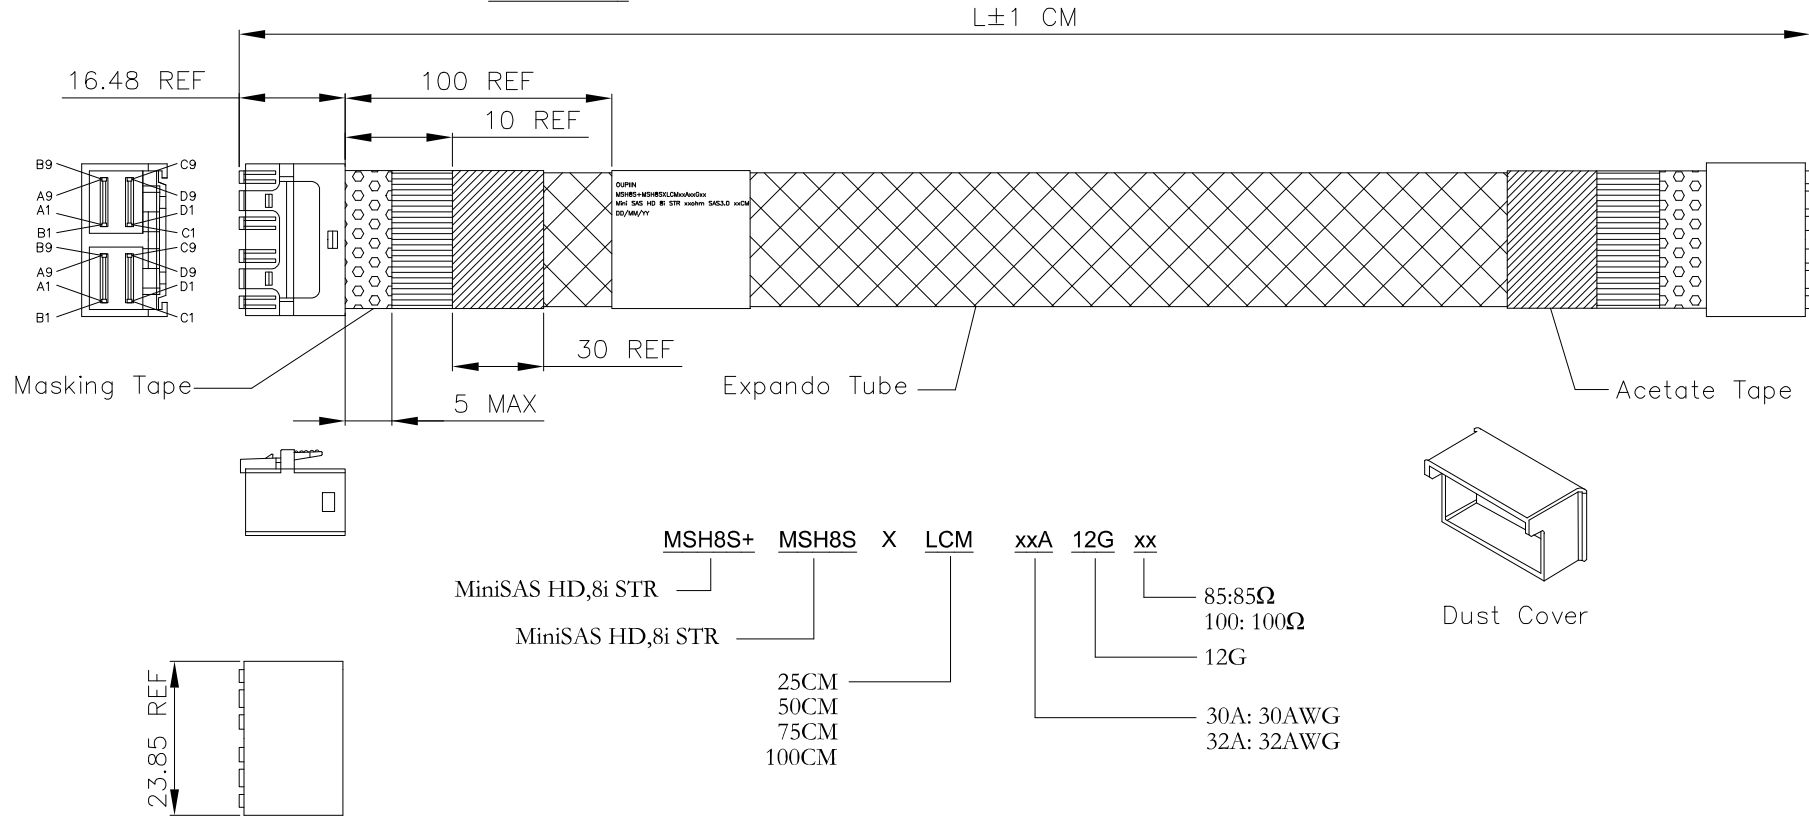

Tolerances	Dwg. No.	S0320220530-02	Part No.	MSH8S+MSH8SXLCMxxA12Gxx	
.x = ±0.50	Projection		Title:	MiniSAS HD 8i STR CABLE	
.xx = ±0.30	Unit	mm	Scale	1:N	
.xxx = ±0.15	Drawn By	Martin 05/30'22	①517	SHEET	1/2 Ver.No. X1



OUPIIN ENTERPRISE CO., LTD.

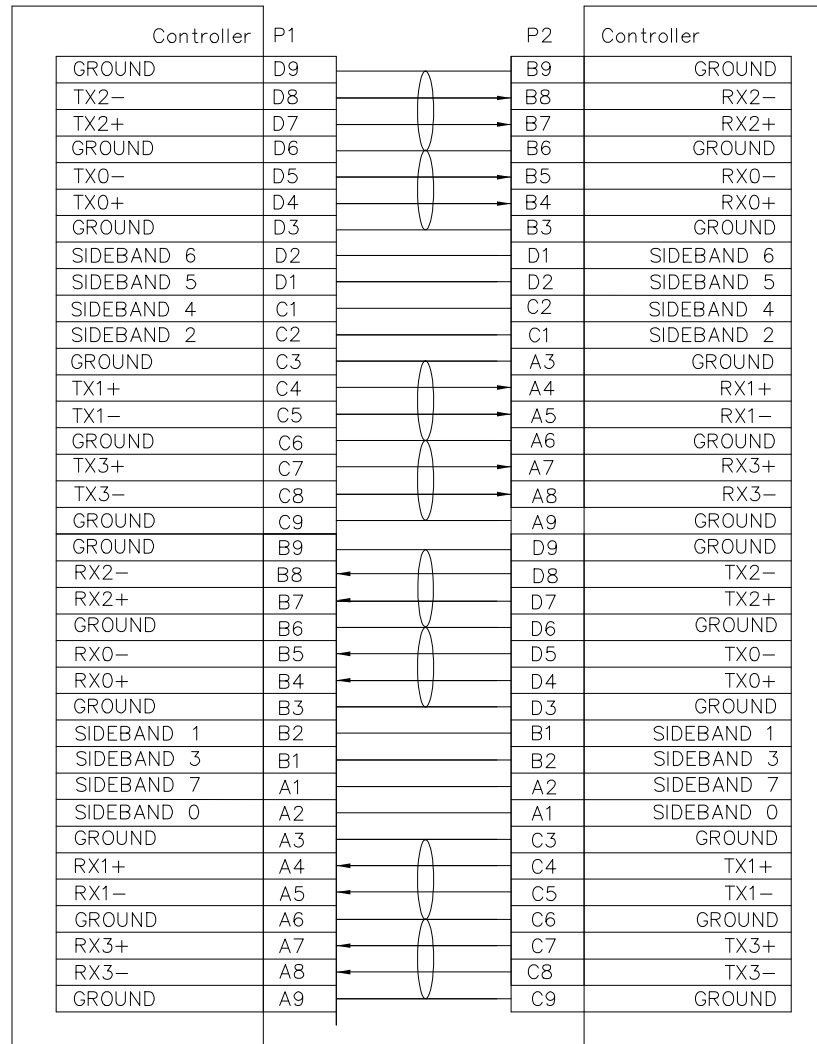

WIRING TABLE

Tolerances	Dwg. No.	S0320220530-02	Part No.	MSH8S+MSH8SXLCMxxA12Gxx			
.x = ±0.50	Projection		Title:	MiniSAS HD 8i STR CABLE			
.xx = ±0.30	Unit	mm	Scale	1:N			
.xxx = ±0.15	Drawn By	Martin	①517	SHEET	2/2	Ver.No.	X1



OUPIIN ENTERPRISE CO., LTD.