


Part List

1	SAS Cable	U20744 (32AWG*2C+2D)+AM, Blue, 85ohm
2	Label	White, 60*30mm(REF)
3	PCBA	PCBA-Oculink 4i Conn. & Oculink 4i PCB, FR-408HR, 30u" Gold Plated
4	Inner Mold	Inner Molding For Oculink 4i STR, Black
5	Cover	Oculink 4i Cover PC+ABS, 30% G.F, Black
6	Acetate Tape	Acetate Tape, W=25mm, Black
7	Weave	Plastic Braid Sleeve, Pet, Black, OD8.0mm
8	Wire	Sideband, 32AWG
*RoHS Compliant		

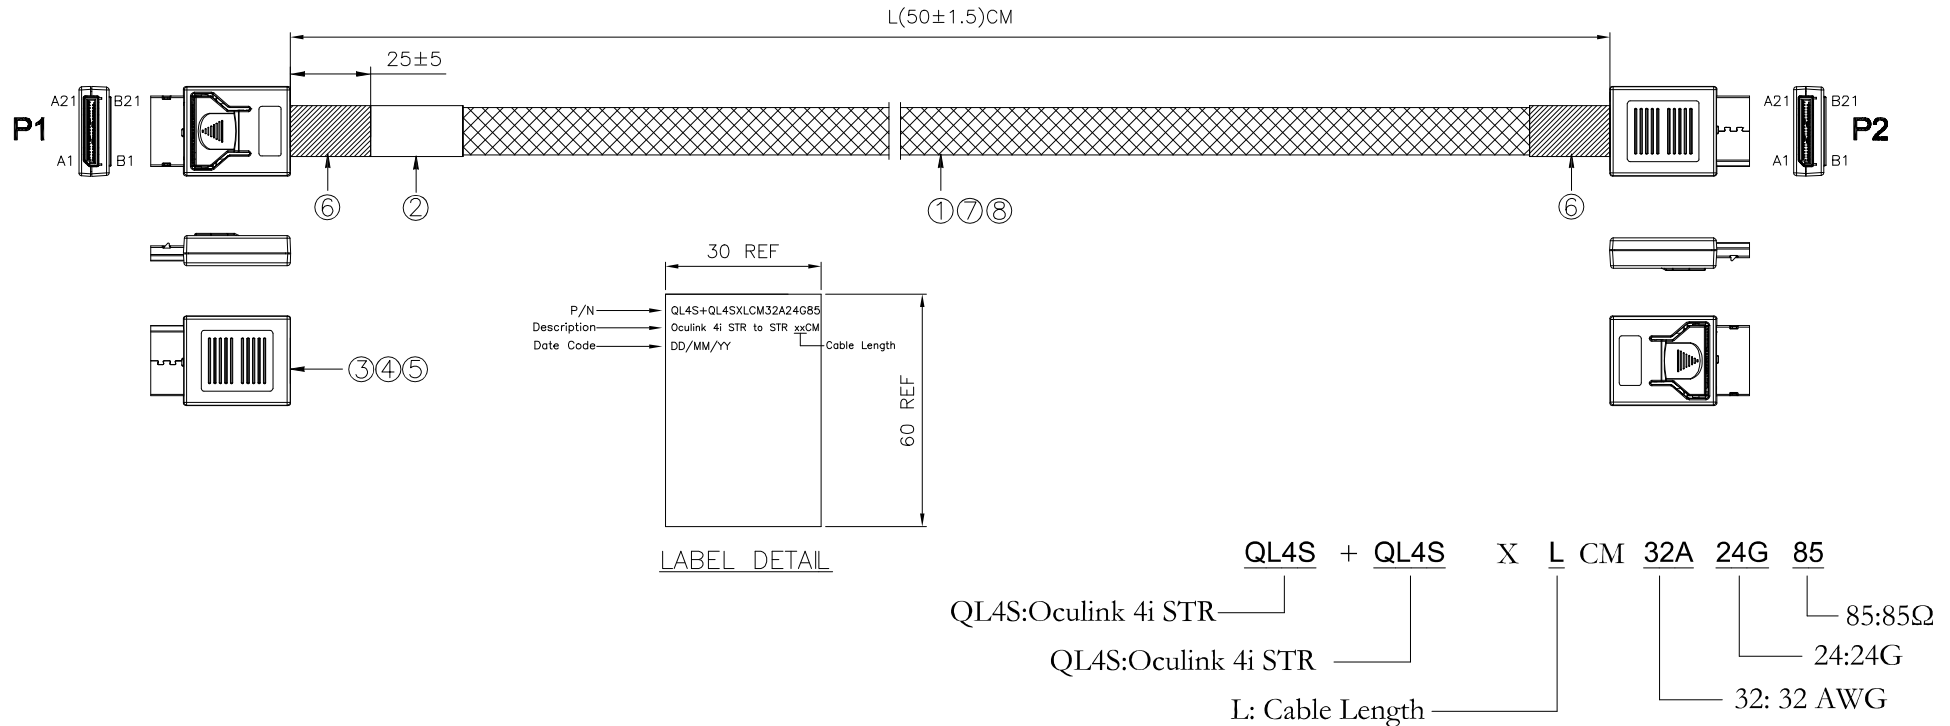


Test Condition:

- 1.100% Open & Short & Miss-wiring & Intermittence Test.
- 2.Conductive Resistance:3Ω max
- 3.Insulation Resistance:10MΩ
- 4.Hi-POT Test: 300VDC for 10ms
- 5.The Product Meets PCIe4.0

Tolerances	Dwg. No.	S2320220706-01	Part No.	OUPIIN OUPIIN ENTERPRISE CO., LTD.					
.x = ±0.40	Projection		QL4S+QL4SXLCM32A24G85						
.xx = ±0.30	Unit mm	Scale	1:N	Title:	Oculink, 4i, STR to STR	SHEET	1/2	Ver.No.	X1
.xxx = ±0.20	Drawn By	Martin 07/06'22	①517	Cable Assembly, PCIe4.0					

WIRING TABLE

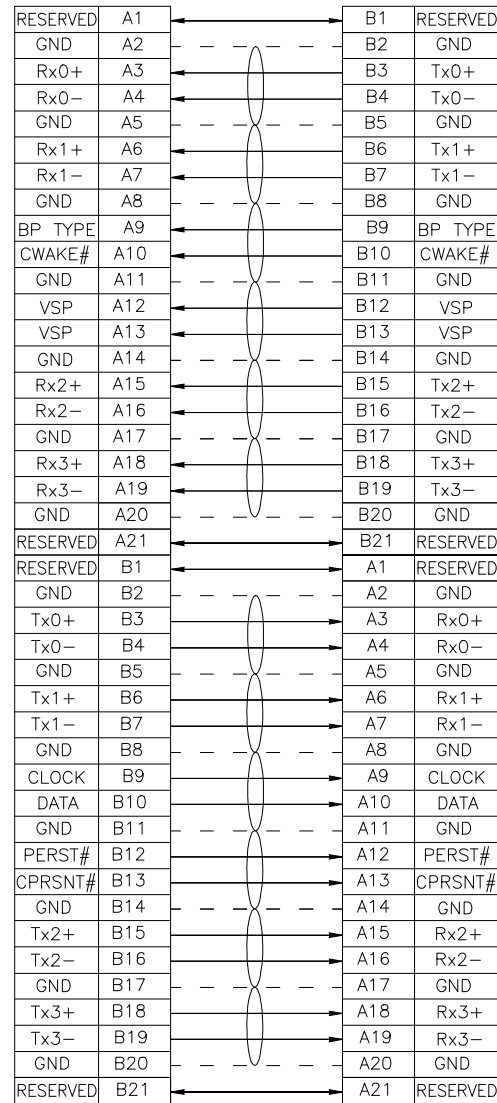

Tolerances	Dwg. No.	S2320220706-01		Part No.	OUPIIN ENTERPRISE CO., LTD.	
	.x = ±0.40	Projection				Title: Oculink, 4i, STR to STR Cable Assembly, PCIe4.0
	.xx = ±0.30	Unit <i>mm</i>	Scale	1:N		
.xxx = ±0.20	Drawn By	Martin 07/06'22		①517	SHEET 2/2 Ver.No. X1	