

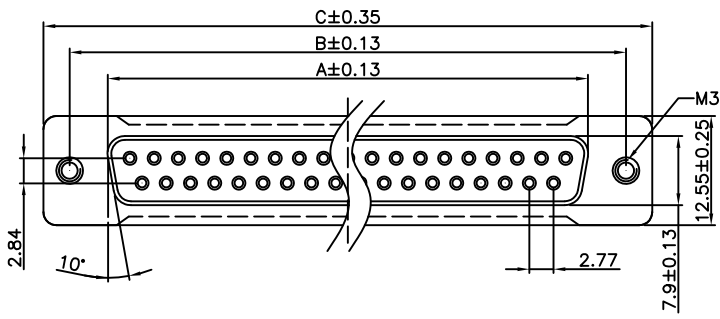
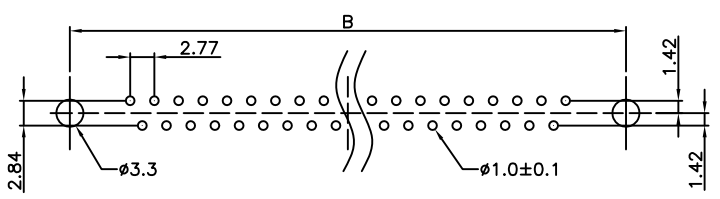


REV.	SPECIFICATION	ECN NO.	APPD.
A5			



Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated on Contact Area and 100u" Min Tin Plated over Nickel 50u" Min .
Shell: Steel.

Electrical Characteristics:
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V for 1 minute.
Insulation Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

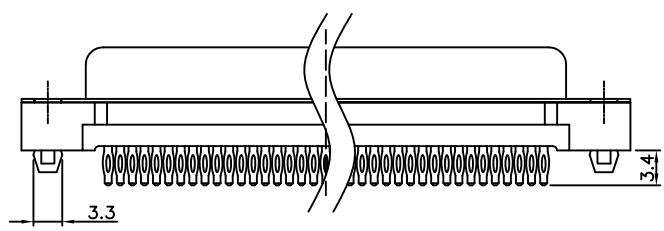

P.C. Board Layout

7905- xx F T B P C 00 N3 A -M3

Series ———
Position ———
F: Female ———
B: Black ———
P: Press Fit Type ———
C: Selective Gold Plated ———
M3: M3 Threaded Hole ———
A: Tray Package ———
N3: With Threaded Riveted Brackets(Board Locks) ———
00: G/F ———

Position	Dimension		
	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

Tolerances	Dwg. No.	7905D02050
x = ±0.50	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	jia-chi 01/03'18

Title:
7905 Series
D-SUB Straight Type

OUPIIN
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 7905-xxFTBPC00N3A-M3

SHEET	1/1	Ver.No.	A2
--------------	-----	----------------	----

① 747