
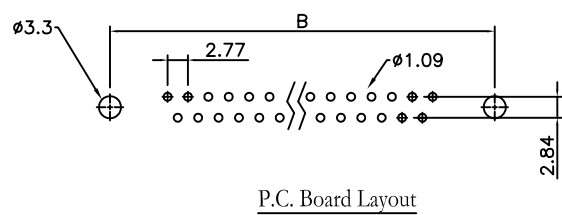
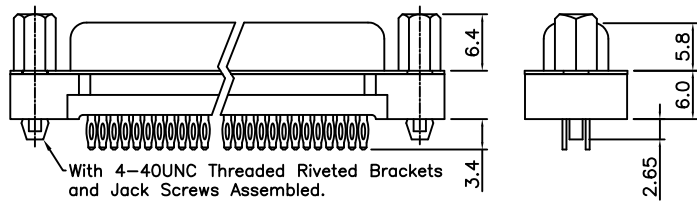
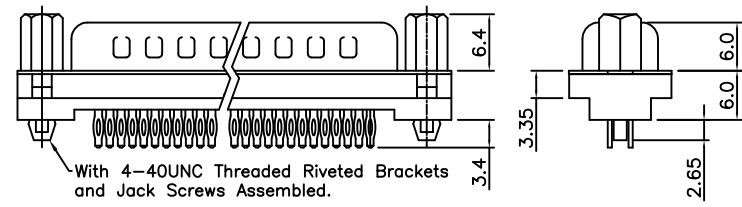
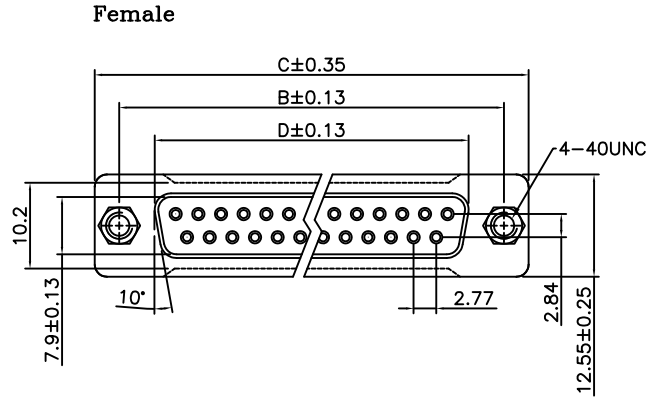


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated on Contact Area and 100u" Min Tin Plated on solder tail over Nickel 50u" Min.
Shell: Steel.

Electrical Characteristics:
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulation Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

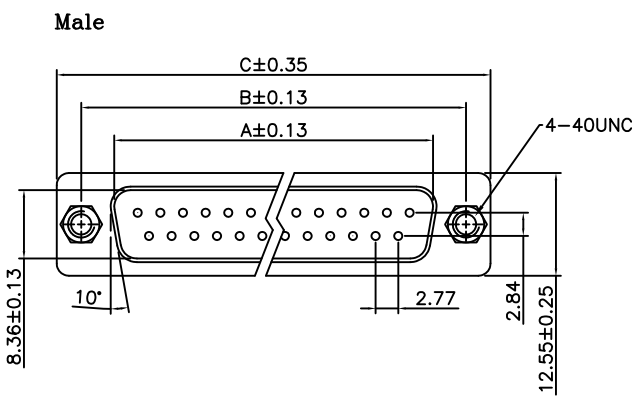

7905- xx M T B P C 00 N3N6 A

Series: 7905-
Position: xx
M: Male
F: Female
B: Black
P: Press Fit Type
C: Selective Gold Plated
A: Tray Package
N3N6: With 4-40UNC Threaded Riveted Brackets and Jack Screws Assembled
00: G/F

Position	Dimension			
	A	B	C	D
9	16.92	24.99	30.81	16.33
15	25.25	33.32	39.14	24.66
25	38.96	47.04	53.04	38.38
37	55.42	63.50	69.32	54.84

Tolerances	Dwg. No.	7905D03006	Title:	7905 Series D-SUB Straight Press Fit Type		
x = ±0.5	Projection		① 747	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7905-xxMTBPC00N3N6A&7905-xxFTBPC00N3N6A		
.x = ±0.25	Unit	mm			Scale	1:1
.xx = ±0.15	Drawn By	Lucas 12/25'17				

SHEET	1/1	Ver.No.	A8
--------------	-----	----------------	----