

REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN211220	

Material and Plating:





Housing: LCP, UL94V-0, Black.
 Contacts: Phosphor Bronze
 Gold Plated on Contact Area and 80u" Min Tin
 Plated on Solder Tail over Nickel 50u" Min.

Electrical Characteristics:


Current Rating: 3.1A.
 Dielectric Withstanding Voltage: AC 600V For 1 minute.
 Insulator Resistance: 6000MΩ min. at DC 250V.
 Contact Resistance: 8.4mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+125°C.

***RoHS Compliant**


Speed: 28+Gbps @-3dB.

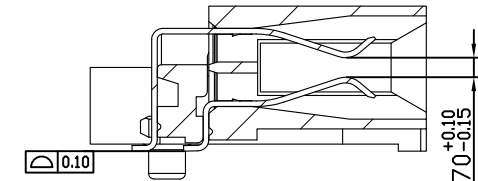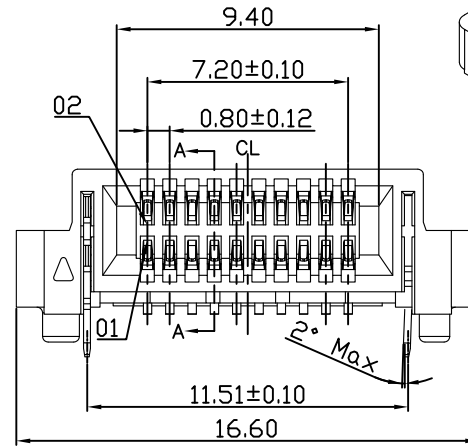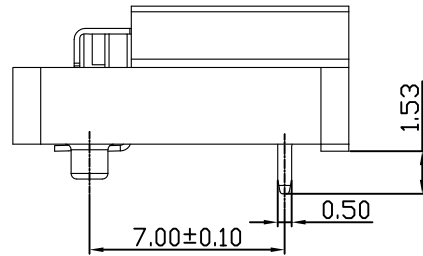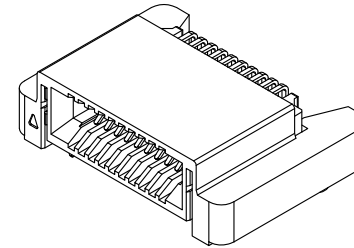

Section A-A
Scale 2:1

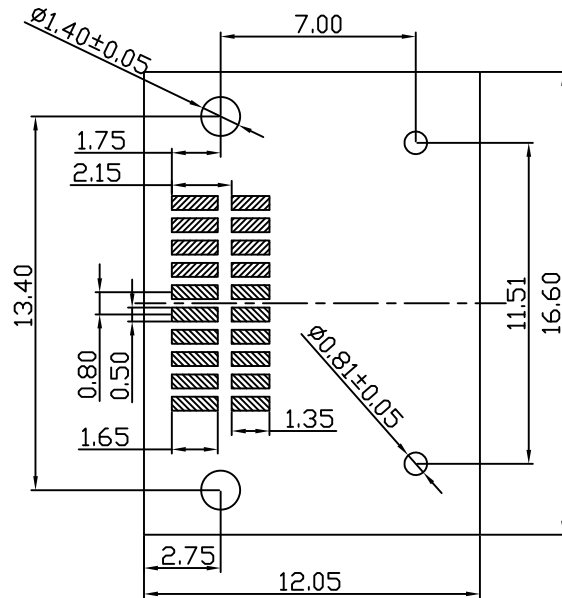


P.C. Board Layout
(Tolerance ±0.05)

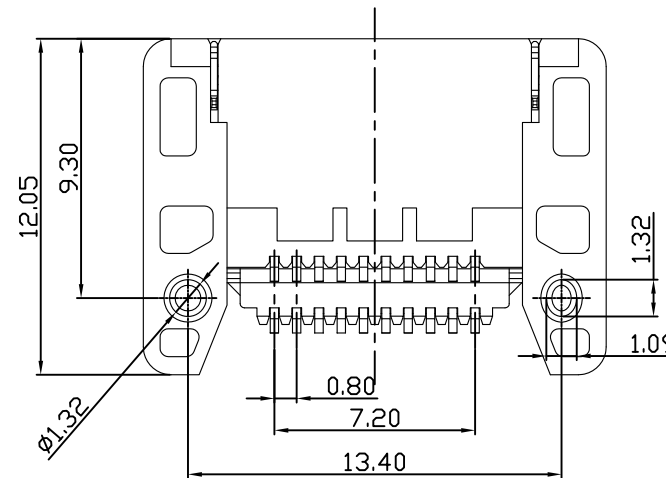




8206- 2 X 10 C 30 R P T
 Series Double Row Position Per Row C: Selective Gold Plated 30: 30μ" T: Tape&Reel Package U: Tube Package P: With Post N: Without Post R: Right Angle Type

Tolerances	Dwg NO.	8206-D0000-008	Title:		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 8206-2X10C30RPT SHEET 1/2 Ver.No. R4
x = ±0.50	Projection		8206 Series		
.x = ±0.25	Unit	mm	Scale	2:1	
.xx = ±0.15	Drawn By	ZY 12/22'21	Edge Card Connector		

REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN211220	

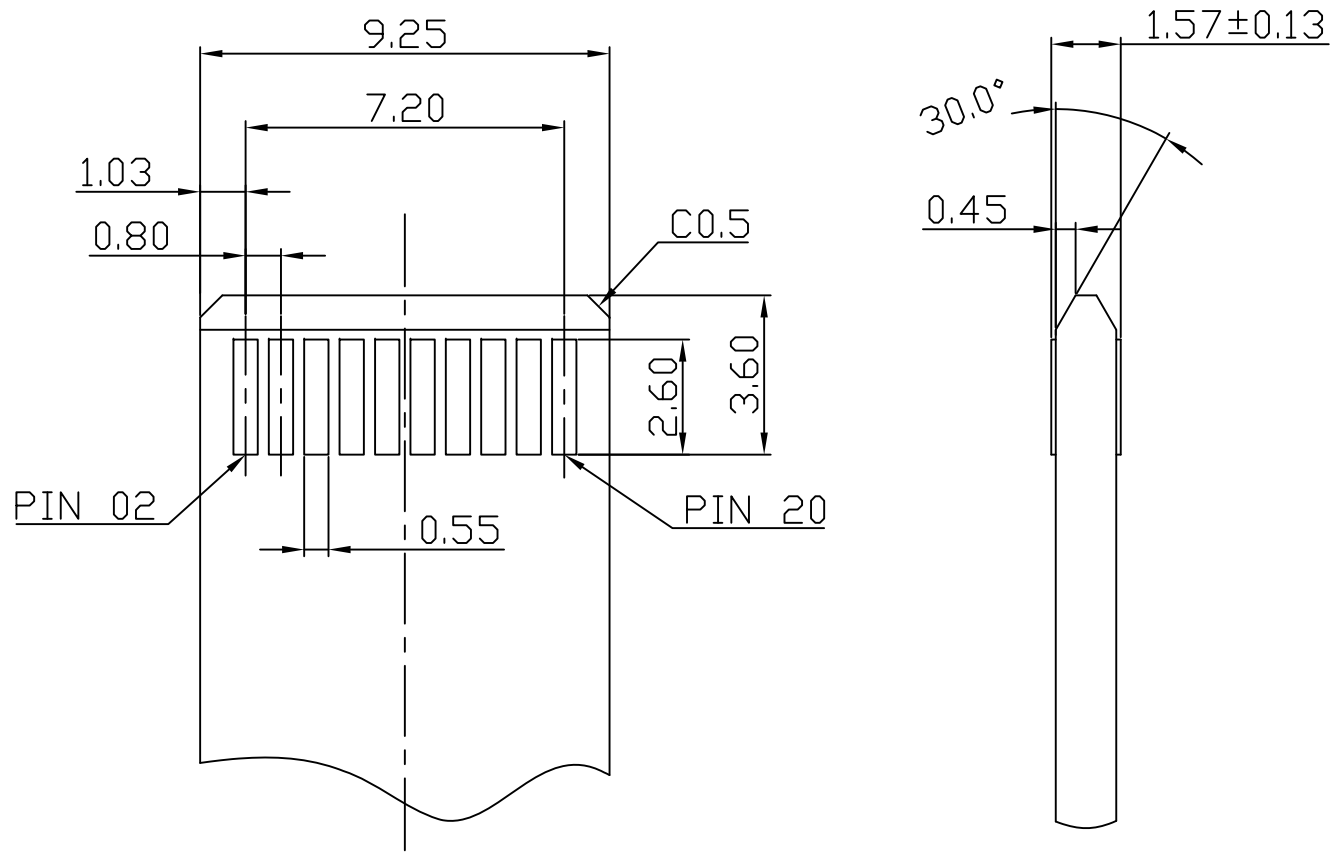

Recommended Mating Board Footprint
(Tolerance ± 0.05)

Tolerances x = ± 0.50 .x = ± 0.25 .xx = ± 0.15	Dwg NO.	8206-D0000-008		Title: 8206 Series Edge Card Connector	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.	
	Projection					
	Unit	mm	Scale			2:1
	Drawn By	ZY 12/22'21				
SHEET		2/2	Ver.No.	R4		