



# PRODUCT SPECIFICATION

## 產品規格書

產品名稱 Description	產品料號 Part No.	圖號 Drawing No.
Edge Card Connector 0.8mm(0.0315") Pitch SMD Type	8206-2XxxCxxRPx	8206-D0000-0xx
	8206-B2XxxCxxRPL1x	8206-D0000-0xx

PRODUCT NAME (產品名稱)	DOCUMENT No.: (文件編號)	Rev. (版本)	OUPIIN
Edge Card Connector 0.8mm(0.0315") Pitch SMD Type (RoHS)	Q8206-PSS-002	B (1800)	(歐品)
	<b>Approved</b> (核准)	<b>Checked</b> (審核)	<b>Prepared</b> (製作)
	Q.A. Section Chief	Ruru Chen	2021.11.29



# PRODUCT SPECIFICATION OF Oupiin

## 1. SCOPE 適用範圍

This product specification defines the product performance and the test methods to ascertain the performance of the Edge Card Connector 0.8mm(0.0315") pitch SMD type, which is designed and manufactured by Oupiin Electronic Co., Ltd. This product specification is applicable but not only for those part numbers which be shown in the cover page.

本產品規格書規定了由歐品電子有限公司設計生產的 Edge Card Connector 0.8mm(0.0315") pitch SMD Type 型連接器，產品的特性及測試方法。本產品規格書適用於但不局限於封面所顯示的產品料號。

## 2. REFERENCE DOCUMENTS 參考文件

MIL-STD-1344	Test method for electrical connector 電子連接器測試方法
MIL-STD-202	Test method for electrical components 電子零件測試方法
EIA364	Test method for electrical components 電子零件測試方法
JIS C 0051	Test method for electrical components 電子零件測試方法
MIL-G-45204C	Specification for gold plating 鍍金規格
IEC-512-3	IEC standard for current carrying capacity tests IEC電流測試標準
QQ-N-290A	Specification for nickel plating 鍍鎳規格
MIL-P-81728A	Specification for tin/lead plating 鍍錫鉛規格
MIL-T-10727B	Specification for tin plating 鍍錫規格
UL1977	UL standard for safety of attachment plug and receptacle UL安規要求標準

## 3. FEATURE & DIMENSIONS 特徵及尺寸

### 3.1. PRODUCT DIMENSION 產品尺寸

These connectors shall have the dimensions as shown in drawing.

本產品的相關尺寸參見圖面。

### 3.2. PCB/PANEL LAYOUT 印刷電路板佈局

The recommended PCB layout is shown in drawing.

本產品適用的 PCB layout 參見圖面。

### 3.3. BILL OF MATERIAL 材料清單

Harmful material controlling follows the requirements of RoHS. The bill of material is described in drawing.

有害物質控制符合RoHS指令要求。本產品使用的材料參見圖面。

### 3.4. MECHANICAL & ELECTRICAL CHARACTERISTIC 機械及電氣特性

The connector shall have the mechanical and electrical performance as described in drawing.

本產品的機械及電氣特性參見圖面。



## PRODUCT SPECIFICATION OF Oupiin

### 3.5. PACKAGING 包裝

Products shall be packaged according to requirements specified in purchase order for safe delivery, connector container and the packaging method are shown in package specification.

產品可依客戶指定要求包裝，包裝材料與包裝方式參見產品包裝規範。

### 3.6. RATING CURRENT AND RATING VOLTAGE 額定電流與額定電壓

Rating current : 3.1A

額定電流：3.1A

Rating voltage is 240V AC RMS.

額定電壓：240V AC RMS。

### 3.7. STORAGE AND OPERATING TEMPERATURE 儲存與使用溫度

Temperature range: -55°C~+125°C, including terminal temperature rise for rating current.

Storage Temperature :0°C~+40°C, Humidity: 80%RH under , Time limit is 18 months the products are stored。

溫度範圍：-55°C~+125°C，包含接觸端子的額定電流溫升。

儲存溫度：0°C~+40°C，濕度：80%RH以下，產品限存時間為18個月。

## 4. Environmental 環境要求

### 4.1. SOLDERABILITY 可焊性

Connectors meet solder-ability to EIA-364-52, and shall be free of contaminants.

產品可焊性符合EIA-364-52標準規定的相關要求，表面不得有污染物。

### 4.2. RESISTANCE TO SOLDER HEAT 耐焊接熱

#### 4.2.1. INFRARED REFLOW 紅外線回流焊接

Each cycle consists of three consecutive phases. as shown in **Table III**.

每個焊接週期包括三個連續的階段，見附表三。

Note: 說明

Device temperature measurements are referenced from the top-center of the package outer surface.

設備溫度量測時以從頂部中間位置測量為準。

## 5. PERFORMANCE AND TEST DESCRIPTION 性能及測試

### 5.1. REQUIREMENT 要求

Product is designed to meet electrical, mechanical, and environmental performance requirements specified in **Table I**.

本產品設計符合附表一所列的機械，電氣及環境要求。



## PRODUCT SPECIFICATION OF Oupiin

### 5.2. TEST CONDITION 測試條件

Unless otherwise specified, all tests shall be performed at ambient environmental conditions.  
除非特別註明，所有測試在室溫條件下完成。

### 5.3. SAMPLE SELECTION 樣品選擇

Test samples shall be selected at random from current production. No test samples shall be reused.  
Samples are pre-conditioned with 10cycles of durability. Each group shall be containing 5 test samples at least.

測試樣品從現生產的產品中隨機抽取，所有測試過的樣品不得重複使用。樣品已預先插拔10次，每組測試至少有5個樣品。

### 5.4. TEST SEQUENCE 測試順序

Product qualification test sequence as shown in **Table II**.  
產品品質測試順序見附表二。



## PRODUCT SPECIFICATION OF Oupiin

### Table I: Test Requirements and Methods

### 附表一：測試要求與方法

Items 項目	Requirements 要求	Test Methods 測試方法
1. Confirmation of Product (產品確認)	Product shall be conforming to the requirements of applicable product drawing. 產品必須符合相關產品圖面的要求。	Visually, dimensions and functionally inspected per applicable product drawing. 依相關產品圖面，檢查產品的外觀、尺寸及功能。
2. Contact Resistance (接觸阻抗)	8.4 mΩ Max. initial. 初始狀態最大 8.4 mΩ。	Subject mated contacts assembled in housing to closed circuit of 100 mA max , 30mV max. Per EIA-364-06 所述固定端子連結到一個封閉回路中測試, 電流 100 mA max, 電壓 30 mV max。 適用：EIA-364-06
3. Insulation Resistance (絕緣阻抗)	6000 MΩ Min. 最小 6000 MΩ.	Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. (500 V DC±10%). Per EIA-364-21 測試產品相鄰端子間以及端子與接地間的電阻 (500 V DC±10%)。適用：EIA-364-21
4. Dielectric Withstanding Voltage (耐電壓)	Power pin must withstand test potential of 600 VAC RMS for 1 minute, current leakage must be 0.2mA Max. Power pin 必須承受測試電壓 600 VAC RMS，時間 1 分鐘，漏電流不大於 0.2 mA。	Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. Per EIA-364-20 對產品相鄰端子間以及端子與接地間加載電壓，並測試其漏電流。 適用：EIA-364-20
5. Durability (Repeated Mating/Un-mating) (耐久性)	Contact Resistance: 10.1 mΩ max. After testing. 測試後接觸阻抗最大 10.1mΩ。	Repeat mate and unmated for connector 500 cycles, at a speed of 25.4 mm per minute. Per EIA-364-09 重復進行配合產品 500 次插拔，速度 25.4mm/分鐘。 適用：EIA-364-09
6. Contact Retention Force (端子保持力)	Power pin: 1.5N /Pin. Min. Power pin 每支最小 1.5N	Apply axial pull out force at a speed of 25.4±3 mm/minute on the contact assembled in the housing. Per EIA-364-29 以 25.4±3mm/分鐘的速度施加軸向拉力從塑膠本體上拔出端子。 適用：EIA-364-29



## PRODUCT SPECIFICATION OF Oupiin

<p>7. Normal Force-Initial (正向力)</p>	<p>0.50 N/Pin. Min. 每支最小 0.50 N。</p>	<p>Exert the axial pressure from carrying the plastics under the sub radian highest point at the speed of 25±3mm / minute. 以 25±3mm/分鐘的速度施加軸向壓力從端子弧度最高處下壓到塑膠面。</p>
<p>8. Mating /Un-mating Force (插入力/拔出力)</p>	<p>Mating force:1.25N /group Max. Un-mating force:0.2N /group Min 插入力每組最大 1.25N 拔出力每組最小 0.2N</p>	<p>At a speed of 25.4±3 mm/minute, apply axial insert the mating part into fully or pull out from the subject product. Per EIA-364-13 以 25.4±3 mm/分鐘的速度，軸向完全插入對配外掛程式到被測產品中或從被測產品中拔出。 適用：EIA-364-13</p>
<p>9. Vibration Sinusoidal Low Frequency (低頻正弦振動)</p>	<p>No electrical discontinuity less than 1µs shall occur, Contact resistance: 8.5 mΩ Max. 不允許出現超過 1 µs 的瞬間斷開，測試後接觸阻抗最大 8.5 mΩ。</p>	<p>Subject mated connector to 10-55-10 Hz traversed in 1 minute at 1.5mm amplitude, 2 hours each of 3 mutually perpendicular planes. 10 mA potential applied. Per EIA-364-28 10-55-10 Hz, 振幅 1.5 mm 條件下，在互相垂直的三個面上，每個面 2 小時下測量，電流 10 mA。 適用：EIA-364-28</p>
<p>10. Thermal Shock (溫度沖擊)</p>	<p>After testing, no damage, Contact Resistance: Rise in relation to Initial Values 8.4 mΩ Max. Dielectric Strength should be OK; Insulation Resistance should be 5000 MΩ Min 測試後產品無損壞，接觸阻抗最大 8.4 mΩ，耐電壓測試 OK，絕緣阻抗最小 5000 MΩ。</p>	<p>Temperature range from -55°C to +85°C. Start from -55°C, after 30 minutes, change to +85±2°C; change time is no more than 30 seconds, total 100 cycles. Per EIA-364-32 溫度變化範圍：-55°C~ +85°C。從 -55°C 開始，30 分鐘後換到+85°C，轉換時間不超過 30 秒，共 100 個循環。 適用：EIA-364-32</p>
<p>11. Humidity-Temperature Cycle (溫濕度循環)</p>	<p>After testing, no damage, Contact Resistance 19.2 mΩ Max. Dielectric Strength should be OK, Insulation Resistance should be 5000 MΩ Min. 測試後產品無損壞，接觸阻抗最大 19.2 mΩ；耐電壓測試 OK，絕緣阻抗最小 5000 MΩ。</p>	<p>Subject product to 25~65°C, 90-95%.R.H Duration: 240 Hours. Per EIA-364-31 產品置於 25~65°C, 相對濕度：90-95%，持續時間：240 小時。 適用：EIA-364-31</p>



## PRODUCT SPECIFICATION OF Oupiin

<p>12. Solderability (可焊性)</p>	<p>There shall have a solder coverage of 95% minimum。 產品在測試完成後，焊接部位粘錫面積大於 95%。</p>	<p>Soldering time: 5 seconds. Temperature: 245±5°C. Per EIA-364-52 焊接時間：5 秒。 溫度：245±5°C。 適用：EIA-364-52</p>
<p>13. Salt Spray (鹽霧)</p>	<p>After testing, no damage, Contact Resistance 16.3 mΩ Max. Dielectric Strength should be OK, Insulation Resistance should be 6000 MΩ Min. 測試後產品無損壞，接觸阻抗最大 16.3 mΩ；耐電壓測試 OK，絕緣阻抗最小 6000 MΩ。</p>	<p>5±1% salt concentration 48 hours 35±2°C Per EIA-364-26 鹽水濃度 5±1%，時間 48 小時，溫度 35±2°C。 適用：EIA-364-26</p>
<p>14. High Temperature Life (高溫老化)</p>	<p>After testing, no damage, Contact Resistance 11.1 mΩ Max. Dielectric Strength should be OK, Insulation Resistance should be 9000 MΩ Min. 測試後產品無損壞，接觸阻抗最大 11.1 mΩ；耐電壓測試 OK，絕緣阻抗最小 9000 MΩ。</p>	<p>Subject product to 105±3°C for 250 hours continuously. Per EIA-364-17 產品置於 105±3°C 連續 250 小時。 適用：EIA-364-17</p>
<p>15. Impedance (single-ended) (單線特性阻抗)</p>	<p>50 ± 10% Ω 50± 10% Ω</p>	<p>Mate connectors: rise time of 1 ns 配對組連接器：1 ns 的上升時間</p>
<p>16. Impedance (differential pair) (差分特性阻抗)</p>	<p>100 ± 10% Ω 100± 10% Ω</p>	<p>Mate connectors: rise time of 150 ps。 配對組連接器：150 ps 的上升時間</p>
<p>17. Differential Insertion Loss(differential pair) (差分插損)</p>	<p>Average: 10.5GHz 平均：10.5GHz</p>	<p>Mate connectors: -3db 配對組連接器：-3db</p>
<p>18. Differential Insertion Loss (single-ended) (單線插損)</p>	<p>Average: 8GHz 平均：8GHz</p>	<p>Mate connectors: -3db 配對組連接器：-3db</p>








PRODUCT SPECIFICATION OF Oupiin

Table III : Reflow Soldering Profile

附表三：回流焊曲線圖

Parameter 參數	Reference 參考	Specification 規格
Ramp-up(升溫區)	25°C ~150°C	3°C /S Max
預熱區(Pre-heating) Temperature Min( $T_{smin}$ ) Temperature Max( $T_{smax}$ ) Time( $T_{smin}$ to $t_{smax}$ )	150°C ~200°C	60~180sec
Time maintained above(保持時間) Temperature( $T_L$ ) Time( $t_L$ )	217°C	60~150sec
Time within 5°C of actual peak Temperature( $t_p$ )	260-/+5°C	20~40sec
Cooling(冷卻區)	Ramp-Down Rate	6°C /S(Max)
Time 25°C to Peak Temperature	25°C ~ Peak Temp.	8 minutes maximum

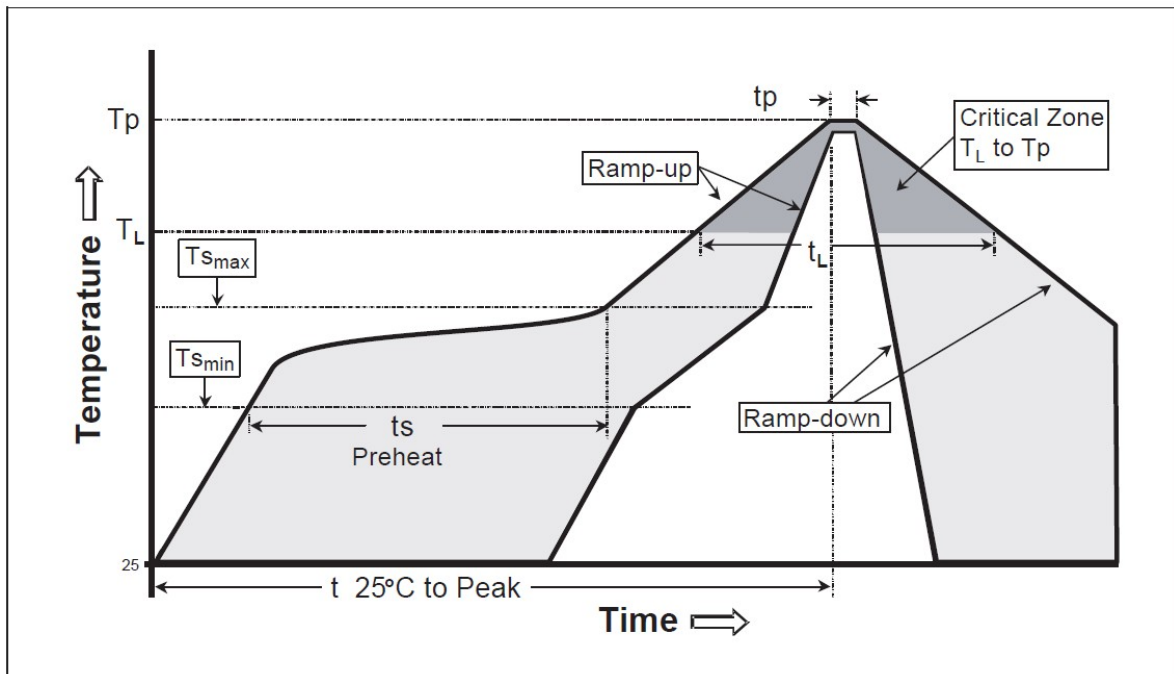

This profile is the minimum requirement for evaluating soldering heat resistance of components. Heat transfer method used for reflow soldering is hot air convection. The actual air temperatures used to achieve the specified profile largely dependent on the reflow equipment.

這個曲線圖是評估元件器件焊接抗熱的基本要求。應用在對焊接中的熱傳遞方式是熱氣對流。達到特定曲線圖地實際溫度主要依賴與回流焊接設備。