


REV.	SPECIFICATION	ECN NO.	APPD.

30 Male

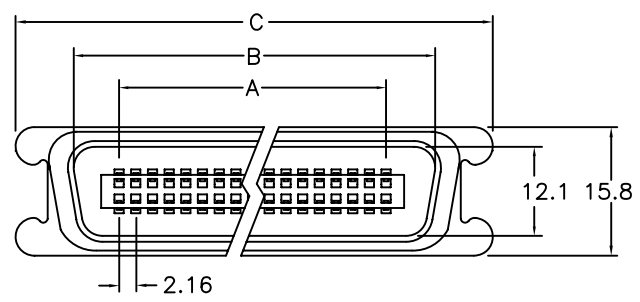



Material:

Housing: 30% Glass Filled PBT UL94V-0.
 Contacts: Brass.
 Shell: Cold Roller Steel.

Electrical Characteristics:

Current Rating: 5 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100 m A.
 Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

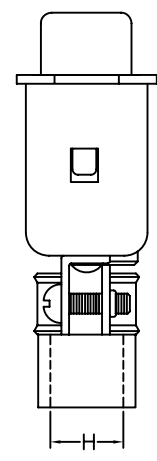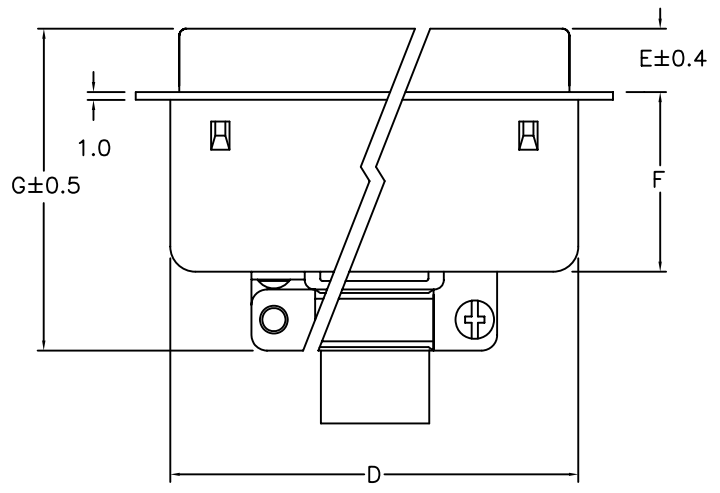

Ordering information

5974- 30 XX0 B
 Series 30: Male 140: 14 Pin 240: 24 Pin 360: 36 Pin 500: 50 Pin
 B: Bulk Package

Position	A	B	C	D	E	F	G	H
14	12.96	25.6	37.85	29.0	8.1	21.2	39.3	7.0
24	23.76	36.3	48.8	39.9	7.6	20.6	38.3	9.0
36	36.72	49.3	61.8	53.2	7.9	22.6	40.6	11.5
50	51.84	64.4	77.0	68.2	8.5	24.9	43.8	12.5

Tolerances	Drawn No.	5974D01002		Title: 5974 Series Centronic Connector Solder Type	
x = ±0.3	Projection	⊕ ↗			
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	Rikey 05/25'09			

①522

OUPIIN
 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 5974-30XX0B
 SHEET 1/1 Ver.No. A2