



REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN130133	

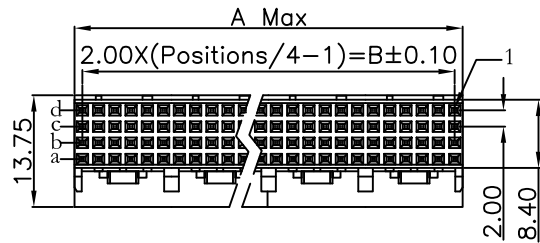

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy

Spacer: High Temperature Plastic UL94V-0.

Electrical Characteristics:

Current Rating: 1 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

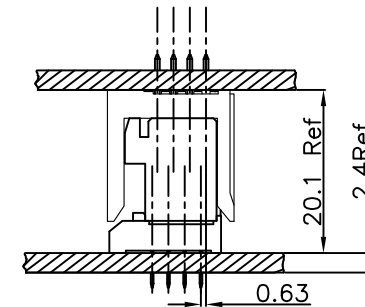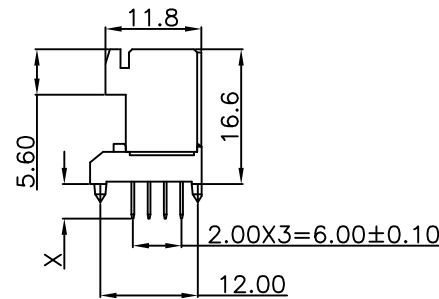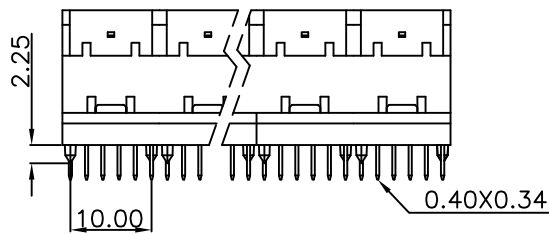

Board-to-Board Offset
Application Example

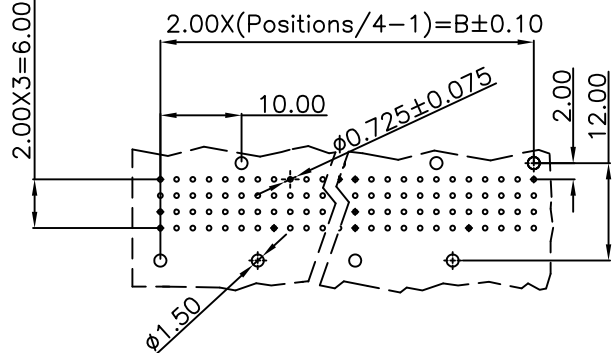

P.C. Board Layout

- Series 9111- 4 6 xx x C xx D H U
- 4Rows
- 6: Female
- Straight
- Position
- 1: Dip Length
- 2: Dip Length
- U: Tube Package
- H: Spacer
- D: Dip Type
- 10: 10 u"
- 30: 30 u"
- C: Dip Tin Plated
- Contact Gold Plated

X length	1	2
	3.45	4.25
Position	Dimension	
	A	B
24	11.95	10
48	23.95	22
72	35.95	34
96	47.95	46
120	59.95	58
144	71.95	70
168	83.95	82
192	95.95	94

Tolerances	Dwg. No.	9111D46001		Title:	9111 Series				
	x = ±0.5 .x = ±0.25 .xx = ±0.15	Projection			H.D.2.0mm(0.079") Female(+)				
		Unit	mm		Scale	1:1			
		Drawn By	CG 01/20'13		4 Rows Female Dip Straight Type				
					OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.				
					P/N: 9111-46xxxCxxDHU				
					SHEET	1/1	Ver.No.	R2	