
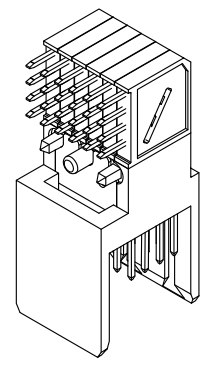


REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN200426	



**Material and Plating:**

Housing: PBT,UL94V-0,Black.

Contacts: Brass.

Gold Plated or Au+Pd/Ni on Contact Area and 80u" Min Tin Plated on Solder Tail over Nickel 50u" Min .

**Electrical Characteristics:**

Current Rating: 1 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at AC 1000V.


Contact Resistance: 30mΩ max. at AC 100mA.

Operating Temperature: -55°C ~+125°C .


**\*RoHS Compliant**

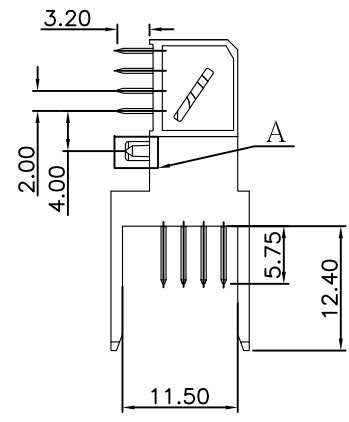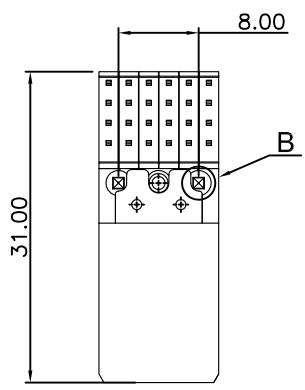

DETAIL:A  
SCALE:4:1



DETAIL:B  
SCALE:4:1

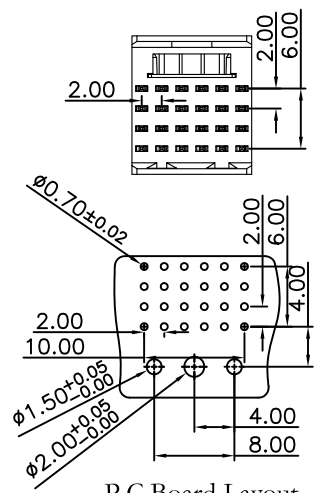

P.C.Board Layout  
(Tolerance:±0.05)

- 9111-A 4 5 24 1 1 CB xx D T
- Series
  - 4: 4Rows
  - 5: Male Signal
  - Position
  - 1:Dip Length
  - 1:Sheet Metal
  - 0: Without Sheet Metal
  - U: Tube Package
  - T: Tape Reel Package
  - D: DIP Type
  - 10: 10 u"
  - 30: 30 u"
  - CB: Dip Tin Contact Au+Pd/Ni
  - C: Selective Gold Plated

Tolerances	Dwg. No.	9111-D0000-028	
x = ±0.5	Projection		
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	WQ 04/09'20	

Title: 9111 Series  
H.D 2.0mm 4 Rows Male  
Right Angle Dip Type

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-A452411CBxxDT			
SHEET	1/1	Ver.No.	R3