

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

CONFIDENTIAL TOP SECRET

SPEC.NO.(規範編號) Q2216SPP-015		APPLICABLE PRODUCT (適用產品) 2216-xxCxxRxU		PAGE 1/4	REV. G
APPLICABLE CUSTOMER (適用客戶) ALL				PACKAGING CATEGORY (包裝方式) TUBE PACKING	

REVISION HISTORY (修訂履歷)

REV.	ECN NO	PAGE (頁次)							
		1	2	3	4				
F		Change Tube P/N . (改為管子料號.)							
G		Modify Tube Layout . (修改管子视图.)							

DIVISION (事業單位) Product Development (產品開發課)	APPROVED (核准)	CHECKED (審核)	PREPARED (制表) CCH5/13/24
---	---------------	--------------	--------------------------

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.


PACKAGING SPECIFICATION (包裝作業規範)

SPEC.NO.(規範編號) Q2216SPP-015


<input checked="" type="checkbox"/> CONFIDENTIAL		<input type="checkbox"/> TOP SECRET	
PAGE	2/4	REV.	G

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)

REMARK (備注)




Drawing One: Product Installing Mode
(圖一產品裝入方式)

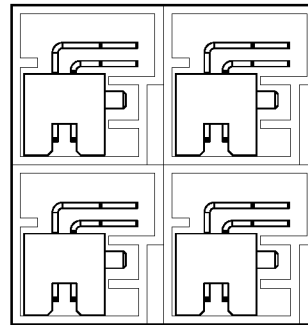

Drawing Two: Each Bundle four Tube
(圖二: 每4管為1捆)

Rubber Band
(橡皮筋)

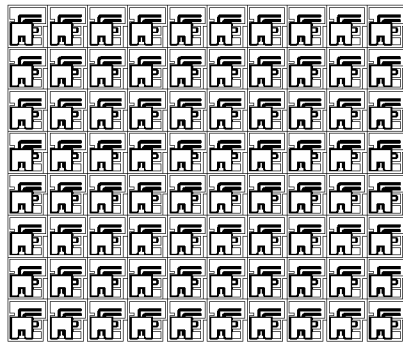

Drawing Three: Lay 5 bundles in each layer. Install in 4 layers. Nine bundles, 80 tubes in all.
(圖3)每層放5捆。分4層放入,一盒共20捆,共80管
Disposing schematic diagram of Tube in the inner box, for reference.
(管在內盒的擺放示意圖,供參考)

一.Inner box packing mode: (內盒包裝方式)

- (1).Each tube packing mode:Stuff one end of tube with stopper, stuff the other end of the tube after load into definite quality of product, as shown in drawing One.And stuffing in stopper,the end of the stopper must be level with the tube mouth, can't be shown.
(每管包裝方式:用塞子塞住管子一頭,放入一定數量產品後,塞住另一頭,裝入方式如(圖一)所示,且塞子塞入後,末端要和管口平齊,不可外露。)
- (2).Every 5 bundles products are divided into 4 layers, placing manner: Such as (Fig. 2) Show, from both ends to, 50mm of calibre, every twine with the intersection of 1PCS and rubber band 2 line fixed.
(每4管產品分5層,放置方式:如(圖2)所示,兩頭離管口50mm處,各用1PCS橡皮筋纏2道固定。)
- (3).A box and 20 bundles divide into 5 layers and put, 4 bundles are put on the eachth floor. Amounts to 80 tubes. Such as (Fig. three) Show.
(一盒20捆分5層放入,每層放4捆。共80管。如(圖三)所示)

歐品電子(昆山)有限公司


OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

<input checked="" type="checkbox"/> CONFIDENTIAL <input type="checkbox"/> TOP SECRET	
PAGE	3/4
REV.	G

SPEC.NO.(規範編號) Q2216SPP-015

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)	REMARK (備注)
---	-------------

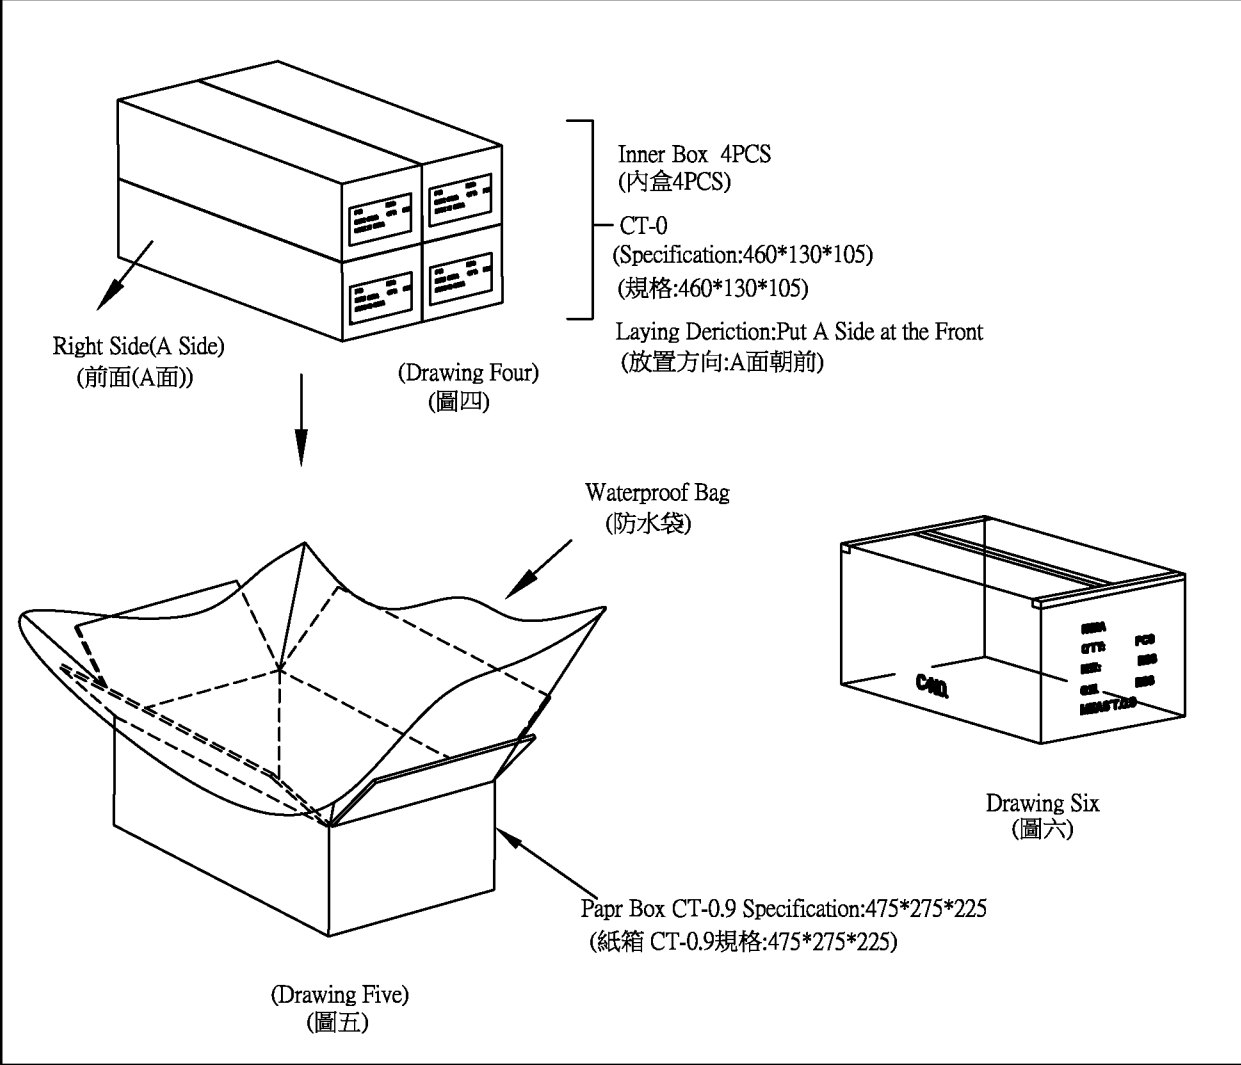

二.Outer box packing mode:
(外箱包裝方式)

- (1).Paper box CT-0.9 Standart 1 PCS.
(紙箱CT-0.9規格 1 PCS.)
- (2).Put waterproof bag 1 PCS in the paper box.
(紙箱內側放入防水袋 1 PCS.)
- (3).Put 4PCS inner box filled with product in the waterproof bag.
(于防水袋內放入4PCS裝滿產品之內盒.)
- (4).Laying mode of the four inner boxes is that A side in front side.,
the laying mode of the four inner boxes must in one direction.
(四個內盒的放置方式為1面朝前放置,四內盒放置方向須一致.)
- (5).The detailed specification of inner box is shown in page two.
(內盒之詳細包裝規範如第2頁.)
- (6).After laying inner boxes, tie the waterproof bag tightly.Seal the
surface of the outer box.(Drawing Six)
(放好內盒,扎緊防水袋。將外箱上層封口。(圖六))

The form on the right and flank side of the bo must be filled correctly
and clearly, take actual testing weight as the standard of every box
gross weight.
(外箱之正麥和側麥所要填寫之項目要填寫正確,清晰,每箱之
毛重應以實測重量為準.)

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

CONFIDENTIAL TOP SECRET

PAGE: 4/4 REV. G

PACKING MATERIAL (包裝材料)			PRODUCT P/N	PACKING N.W.	PACKING QUANTITY (包裝數量)					WEIGHT (重量) kg		
MATERIAL NAME (材料名稱)	PART NO. (料號)	Q'TY	(產品料號)	(包材重量)	PCS/TUBE	TUBE/INNER BOX	PCS/INNER BOX	INNER BOX/BOX	PCS/BOX	N.W./PCS	N.W./BOX	G.W./BOX
PAPER BOXES (紙箱)	CT-0.9	1	2216-10CxxRxU	10.27	44	80	3520	4	14080	0.000331	4.66	14.93
PACKING INNER BOX (內紙箱)	CT-0	4	2216-12CxxRxU	10.27	38	80	3040	4	12160	0.000397	4.83	15.10
			2216-16CxxRxU	10.27	31	80	2480	4	9920	0.000530	5.25	15.52
			2216-20CxxRxU	10.27	26	80	2080	4	8320	0.000662	5.51	15.78
TUBE (管子)	TUBE-2216R	320	2216-24CxxRxU	10.27	23	80	1840	4	7360	0.000794	5.85	16.12
			2216-28CxxRxU	10.27	20	80	1600	4	6400	0.000927	5.93	16.20
			2216-30CxxRxU	10.27	19	80	1520	4	6080	0.000993	6.04	16.31
TUBE PLUG (塞子)	-----	640	2216-40CxxRxU	10.27	14	80	1120	4	4480	0.001324	5.93	16.20
			2216-44CxxRxU	10.27	13	80	1040	4	4160	0.001456	6.06	16.33
			2216-50CxxRxU	10.27	12	80	960	4	3840	0.001655	6.36	16.63
WATERPROFF BAG (防水袋)	PE100*70	1	2216-60CxxRxU	10.27	10	80	800	4	3200	0.001986	6.36	16.63
			2216-68CxxRxU	10.27	9	80	720	4	2880	0.002251	6.48	16.75
			2216-70CxxRxU	10.27	8	80	640	4	2560	0.002317	5.93	16.20
DRYING AGENT (干燥劑)	-----	3	2216-80CxxRxU	10.27	7	80	560	4	2240	0.002648	5.93	16.20
			2216-90CxxRxU	10.27	7	80	560	4	2240	0.002979	6.67	16.94
RUBBER RIBE (橡皮筋)	-----	640	2216-100CxxRxU	10.27	6	80	480	4	1920	0.003310	6.36	16.63

1.NOTE:

(注意) When the finished products have been made, take the actual weight as the standard of gross weight in each box.

(成品出貨時,每箱之毛重應以實測重量為準)

When the finished products have been made, stick the proper designation list on the box according to product demand.

(成品出貨時,依據出貨要求貼上相對應的標籤單)

CT-1.6 Produce goods taiwan , CT-1.9 Produce goods shanghai. (CT-1.6出貨台灣OP , CT-1.9出貨上海SH)

It doesn't influence the manner of packing with the gold-plated way to print word way, Can amalgamate. (印字方式跟鍍金方式不影響包裝方式, 可以共用)