

REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN211212	








Material and Plating:

Housing: LCP,UL94V-0 , Black.
 Power Contacts:High Conductivity Copper .
 30u"Au+Pd/Ni on Contact Area and 80u" Min Tin
 Plated on Press Fit over nickel 50u" Min.

Electrical Characteristics:

Current Rating: 60AMP.(2ozX4)
 Dielectric Withstanding Voltage: AC 1500V For 1 minute.
 Insulator Resistance: 1500MΩ min. at DC 500V.
 Contact Resistance: 0.5mΩ max
 Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

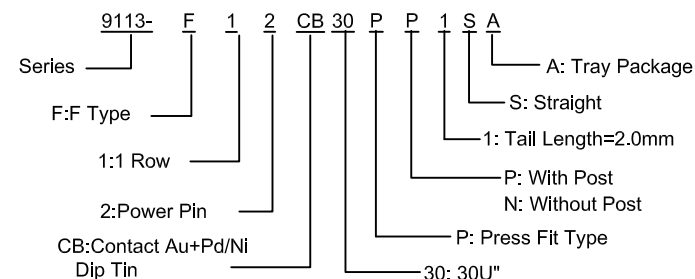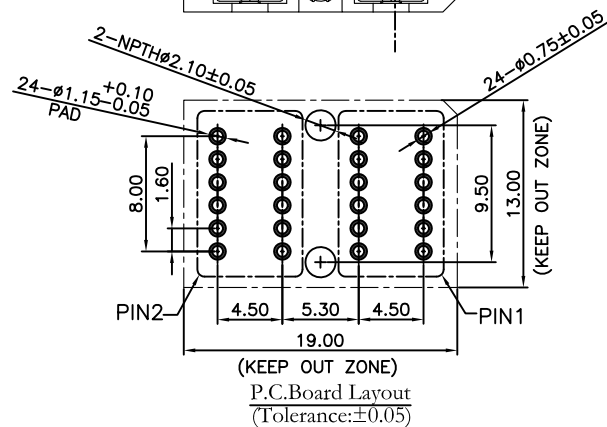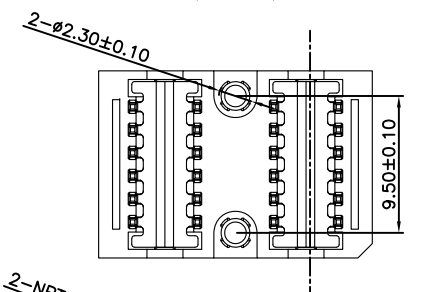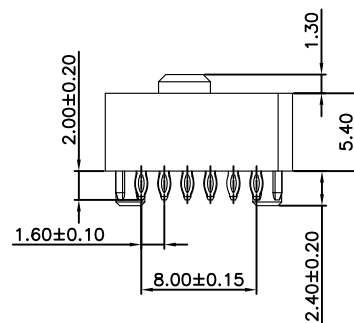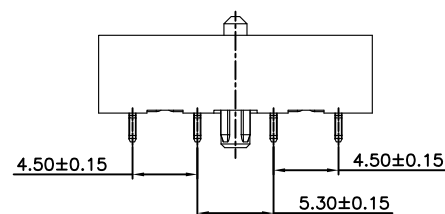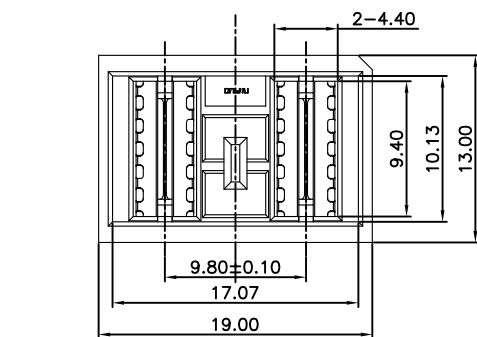

Tolerances	Dwg NO.	9113-D0000-015	Title:	OUPIIN OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
x = ±0.50	Projection		9113 Series	
.x = ±0.25	Unit	mm	1.6mm Pitch Power Header	
.xx = ±0.15	Scale	1:1		
	Drawn By	ZY 12/07'21		P/N: 9113-F12CB30PP1SA
				SHEET 1/1
				Ver.No.
				R3