

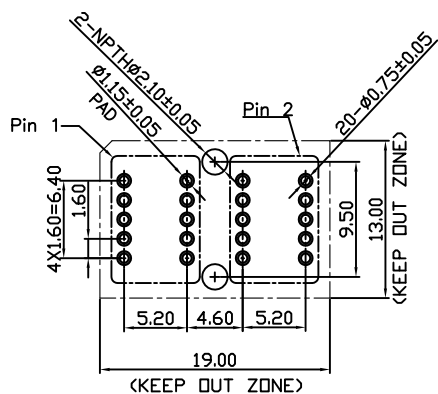


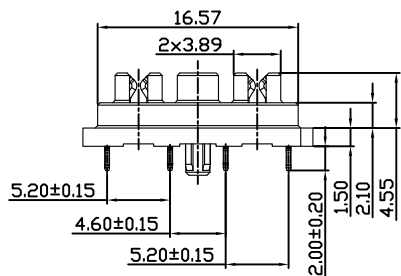


REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN211212	



P.C.Board Layout
(Tolerance:±0.05)




Material and Plating:

Housing: LCP, UL94V-0, Black.
Power Contacts: High Conductivity Copper .
30u" Au+Pd/Ni on Contact Area and 80u" Min Tin
Plated on Press Fit over nickel 50u" Min.

Electrical Characteristics:

Current Rating: 60AMP(2ozX4).
Dielectric Withstanding Voltage: AC 1500V For 1 minute.
Insulator Resistance: 1500MΩ min. at DC 500V.
Contact Resistance: 0.5mΩ max
Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

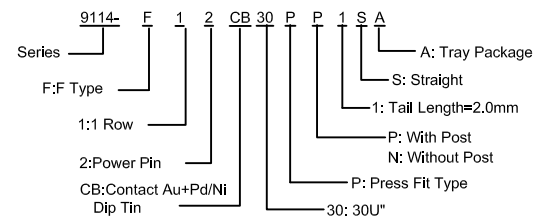

Tolerances	Dwg NO.	9114-D0000-010	Title:	 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9114-F12CB30PP1SA			
x = ±0.50	Projection		9114 Series				
.x = ±0.25	Unit	mm	Scale		1:1		
.xx = ±0.15	Drawn By	ZY 12/07'21	1.6mm Pitch Power Header				
				SHEET	1/1	Ver.No.	R3